

2  
Presented at the Second Annual Geothermal Reservoir  
Engineering Workshop at Stanford University, Stanford, CA,  
December 1-3, 1976, and published in the Proceedings

LBL-5934

MASTER


CONF-761221--2

ANALYSIS OF WELL TESTS WITH VARIABLE DISCHARGE

Chin Fu Tsang, D. G. McEdwards,  
T. N. Narasimhan and P. A. Witherspoon

December 1976

Prepared for the U.S. Department of Energy  
under Contract W-7405-ENG-48

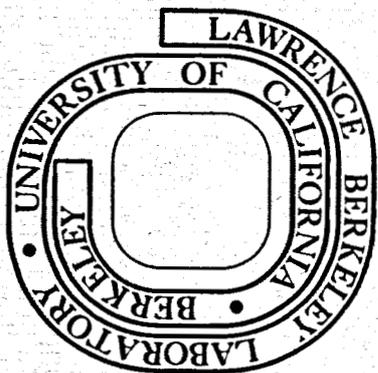

#### **LEGAL NOTICE**

This book was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

## **DISCLAIMER**

**This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency Thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.**

## **DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

Summary of a talk presented at the Second Annual Geothermal Reservoir Engineering Workshop at Stanford, December 1-3, 1976. Published in the Proceedings of the Workshop.

## Analysis of Well Tests with Variable Discharge

Chin Fu Tsang, D. G. McEdwards, T. N. Narasimhan  
and P. A. Witherspoon

Lawrence Berkeley Laboratory  
University of California  
Berkeley, California 94720

**DISCLAIMER**  
This book was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

### Introduction

The conventional methods of well tests analysis usually assume a constant rate of discharge of the producing well. The procedure involves matching a log-log plot of test data (drawdown versus time) to analytic or semi-analytic solutions that are based on a model of the production well as a line source of constant strength in an infinite reservoir. However, variable discharge well test conditions may arise under a variety of conditions, such as existing well-field production schedules, step-drawdown tests, and influence of the pumping water level on the production rate. It is very desirable to have the capability to reliably interpret data from the tests. In fact, the present study was prompted by a set of recent geothermal well test data in which due to various mechanical problems, the flow rate during the first 70 hours of production varied widely and could not effectively be treated as a mean constant rate. The present paper reports the development of a general technique of analyzing well tests with variable flow rates.

This work was supported by the U. S. Department of Energy under Contract Number W-7405-ENG-48.

Method of Analysis

The variable flow is approximated by a series of sequential straight line segments of arbitrary length and slope (Figure 1). The pressure response of each linearly varying production pulse at any time is derived analytically in terms of the well-known exponential integral. The change in pressure head at time  $t$  and distance  $r$  from the producing well that is caused by a production pulse  $n$ , occurring between  $\tau_n$  and  $\tau_{n+1}$  is given by

$$\Delta h_n(t,r) = \frac{1}{4\pi kH} \int_{\tau_n}^{\tau_{n+1}} Q_n(\tau) \frac{e^{-\frac{r^2}{4\alpha(t-\tau)}}}{t-\tau} d\tau$$

If we define

$$x_1 = \frac{1}{4\pi kH}$$

$$x_2 = \frac{r^2}{4\alpha} = \frac{\mu\phi CHr^2}{4kH}$$

and the linear flow rate is given by

$$Q_n(\tau) = A_n + B_n(\tau - \tau_n)$$

then

$$\Delta h_n(t,r) = x_1 \int_{\tau_n}^{\tau_{n+1}} [A_n + B_n(\tau - \tau_n)] \frac{e^{-\frac{x_2}{t-\tau}}}{t-\tau} d\tau$$

The result of the integration is given by

$$\Delta h_n(t,r) = x_1 \left\{ [A_n + B_n(\tau_n + x_2)] [W(u_n) - W(u_{n+1})] - [B_n\tau_n e^{-u_n} - \tau_{n+1} e^{-u_{n+1}}] \right\}$$

where

$$u_n = \frac{x_2}{t-\tau_n}$$

$$u_{n+1} = \frac{x_2}{t-\tau_{n+1}}$$

and  $W(u)$  is the well function, which is related to the exponential integral  $Ei(x)$  by

$$W(u) = -Ei(-u)$$

The total pressure drop as a function of time is obtained by a superposition of the reservoir responses attributable to each production pulse:

$$\Delta h(t,r) = \sum \Delta h_n(t,r)$$

To account for the influence of one linear boundary, a third parameter is defined as

$$x_3 = \frac{\mu\phi C H r_i^2}{4kH}$$

where  $r_i$  is the image well distance, and the pressure drop is then given by

$$\Delta h(t,r) = \sum \Delta h_n(t,r) \pm \Delta h_n(t,r_i)$$

where the position or negative sign indicated an impermeable or fully leaky boundary respectively.

These equations are used to calculate pressure drawdown values that correspond to a specific flow rate variation and a given set of reservoir parameters. Thus with a set of initial guess values of reservoir parameters a multiparameter least-square-fit computer routine is employed to compare well-test data with predicted values in a search for the best set of reservoir parameters. Input data for the program are  $A_n$  and  $\tau_n$ , coordinate points on the production history record,  $\Delta h$  and  $t$ , coordinate points on the well test pressure drawdown record, and a few program control parameters.

Corresponding to optimal values of  $x_1$ ,  $x_2$ , and  $x_3$  obtained, the program assigns values respectively to transmissivity,  $kH$ ; storativity,  $\phi CH$ ; and the image well distance  $r_i$ . Both interference and production tests

can be analyzed. In the latter case, work is in progress to account for the influence of well bore storage and skin effects, also in a parametric fashion.

Applications

The method has been applied to data from seven well tests to evaluate its utility (see Table 1). Three of the analyses involve theoretically generated well test data and four analyses involve field data.

TABLE I. East Mesa Well Data

WELL	Depth		Bottom Temperature		Producing Interval		Lower Casing o.d.
	feet	meters	°F	°C	feet	meters	inches
6-1	8015	2443	399	204	6201-7982	1890-2433	7
6-2	5958	1816	340	188	4790-5959	1460-1816	7-5/8
5-1	6004	1830	315	157	5007-6004	1526-1830	7-5/8
8-1	6001	1829	354	179	4948-6001	1508-1829	7-5/8
31-1	6175	1882	309	154	5420-6175	1652-1882	7-5/8
R38-30	8890	2710	N/A	N/A	4890-8890	1491-2710	7

The field data were from two well tests conducted at the East Mesa Geothermal Field in southern California and from two well tests conducted at the Raft River in southern Idaho. The three theoretical cases involve

well test data calculated assuming: (1) constant discharge; (2) variable discharge in steps, and (3) exponentially decaying discharge. Three of the four field tests were constant discharge interference tests, two of which indicated the presence of a boundary. The last remaining field test involved a discharge rate with a very wide fluctuation.

In all of these cases, a solution was possible and an unambiguous set of reservoir parameters was determined. In the three tests using generated data, known parameters are reasonably reproduced. The first three field interference tests analyses yielded reasonable parameters. Figures 2, 3 and 4 show respectively the theoretical case of exponentially decaying discharge rate, the East Mesa 31-1 constant discharge interference field test analysis involving the detection of a barrier boundary, and the analysis of the Raft River #3 production test, in which the flow rate varied markedly. In the figures, the circles represent observed drawdown data and the squares represent the best-fit drawdown values. The close agreement with analytical and conventional results in cases where they are available indicates the validity of the method. Furthermore, the results of the RRGE 3 production test analysis indicate that the methods can successfully analyze variable flow field data.

### Conclusions

This method will make it possible to do well test analyses when a constant discharge flow rate is difficult to maintain, and permit detection of boundaries even in situations where there is a markedly varying flow rate. Work is currently in progress to extend the analysis to the study short-term data.

**This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.**

**Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.**

TECHNICAL INFORMATION DEPARTMENT  
LAWRENCE BERKELEY LABORATORY  
UNIVERSITY OF CALIFORNIA  
BERKELEY, CALIFORNIA 94720

Nomenclature

$\Delta h$	Pressure head drop
n	Designation of production segment
t	Time
r	Distance from well
k	permeability
H	Thickness of aquifer
$\tau$	Time
Q	Flow rate
$\alpha$	$k/(\phi\mu C)$
$\phi$	Porosity
C	Total compressibility
$r_j$	Image well distance