Presented at the
Thirteenth International Conference on
Low Temperature Physics, Boulder, Colo.
August 21-25, 1972

LBL-851
c.1

RECEIVED
LAWRENCE
RADIATION LABORATORY

LIBRARY AND
DOCUMENTS SECTION

# JOSEPHSON WEAK LINKS: TWO MODELS

P. K. Hansma and G. I. Rochlin

August 1972

AEC Contract No. W-7405-eng-48

For Reference

Not to be taken from this room

LBL-851
c.1

## DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

To be published in: Proceedings of the
Thirteenth International Conference on
Low Temperature Physics, Boulder, Colo.,
August 21-25, 1972

LBL-851
Preprint

UNIVERSITY OF CALIFORNIA

Lawrence Berkeley Laboratory
Berkeley, California

AEC Contract No. W-7405-eng-48

# JOSEPHSON WEAK LINKS: TWO MODELS

P. K. Hansma† and G. I. Rochlin

August 1972

0 0 0 0 3 8 0 0 7 8 8

LBL-851

Josephson Weak Links: Two Models.* P. K. Hansma† and G. I. Rochlin, Dept. of Phys., Univ. of Calif., Berkeley and IMRD, Lawrence Berkeley Lab., Berkeley, Calif. 94720 --We have performed a series of experiments to investigate two "models" for studying the behavior of weak-link Josephson effect structures. The first is a low-inductance, externally shunted, oxide-barrier Josephson junction. This acts as a generalized weak link in that it can be adjusted, even at liquid helium temperatures, to replicate the I-V characteristics of widely varying types of weak links. The other model is a driven, damped pendulum whose equation of motion is equivalent to the second-order nonlinear current-phase equation of the links. Observations on both models not only indicate the correctness of the assumed equivalent circuit by verifying the solutions in detail, they provide new physical insight into the nonlinear behavior of the phase and thus of the current-voltage relationship of weak links in general.

---

*Work supported by the U. S. Atomic Energy Commission.

†Present address: Dept. of Physics, U.C. Santa Barbara, Santa Barbara, California 93106

Submitted by

G. I. Rochlin
Department of Physics
University of California
Berkeley, California 94720

0 0 0 0 3 8 0 0 7 8 9



# Josephson Weak Links: Two Models

P. K. Hansma† and G. I. Rochlin

Department of Physics, University of California,
and
Inorganic Materials Research Division,
Lawrence Berkeley Laboratory
Berkeley, California 94720

In 1968 Stewart[1] and McCumber[2] independently advanced a theory to explain why the observed current-voltage characteristics of one type of weak link device differed so markedly from that of other related devices. They proposed that the difference between the current-voltage characteristics of many of these devices could be explained by analyzing them in terms of a lumped circuit model that treated the distributed internal resistance and capacitance of the device as a single resistor and a single capacitor, both in parallel with a hypothetical idealized Josephson element having zero capacitance and an infinite resistance to quasiparticle tunneling. These ac and dc supercurrents obey Josephson's equations[3]

$$i = i_c \sin\phi \tag{1a}$$

and

$$\left(\frac{2e}{\hbar}\right) V = d\phi/dt, \tag{1b}$$

where $i_c$ is the critical supercurrent, $\phi$ and V are the pair phase difference and instantaneous voltage across the element, and i is the instantaneous supercurrent. The observed time-averaged dc current-voltage characteristic of such a lumped circuit model is a function of the dimensionless parameter

$$\beta_c = \left(\frac{2e}{\hbar}\right) i_c \left(\frac{C}{G^2}\right), \tag{2}$$

which gives a normalized measure of the balance of influence of the capacitance C, shunt conductance G, and critical supercurrent $i_c$ on the hysteresis.

Our first construction to verify the circuit model on which the theory is based was a generalized weak link.[4] This was constructed by modifying a conventional S-I-S evaporated film junction with an external resistive shunt in parallel with the junction as shown in Fig. 1. The shunting is through the Ag-I-Sn quasiparticle tunneling junctions adjacent to the Sn-I-Sn Josephson junctions. By placing the shunts this close to the junctions, we minimize the loop inductance between the junction and the shunt that prevented detailed comparison with theory for some earlier geometries.[5] With these shunts, the resistance that appears in the lumped circuit model of the junction is the parallel combination of the Josephson junction quasiparticle tunneling resistance and the resistance of the shunt. We were able to investigate large ranges of $\beta_c$ for <u>each</u> shunted jucntion since $\beta_c$ can be easily changed, while the junctions are in the dewar, by applying a small magnetic field (0 to 1 Oe).

For our mechanical model experiments we used a mechanical analog of the type developed by Sullivan and Zimmerman.[6,7] This model is not only a great aid to the intuition, but also can be used quantitatively to generate plots of torque vs time-averaged rate of rotation which are analogs of junction current-voltage characteristics.

## ANALOGY MODEL

Using the lumped circuit model for a generalized Josephson weak link, the total current, I, is the sum of three terms: (1) the current through the capacitor, C(dV/dt); (2) the current through the resistor, GV; and (3) the Josephson supercurrent, $i_c \sin\phi$. That is:

$$I = C\frac{dV}{dt} + GV + i_c \sin\phi. \tag{3}$$

In writing this equation we have used only elementary circuit theory and the dc Josephson equation. By using the ac Josephson equation we can eliminate the voltage, thus obtaining the equation

$$I = \frac{C\hbar}{2e}\frac{d^2\phi}{dt^2} + \frac{G\hbar}{2e}\frac{d\phi}{dt} + i_c \sin\phi. \tag{4}$$

This equation can be reduced to dimensionless form by dividing through by the critical current and substituting a dimensionless time $\tau = (2e/\hbar)(i_c/G)t$. The resulting equation is

$$\frac{I}{i_c} = \beta_c \frac{d^2\phi}{d\tau^2} + \frac{d\phi}{d\tau} + \sin\phi \tag{5}$$

where $\beta_c$ is the dimensionless circuit parameter defined in Eq. (2).

This equation can be solved for the time-averaged voltage, $\langle V \rangle_t$ as a function of the current, I. The main difference between the solutions for different values of $\beta_c$ is in the amount of hysteresis in the I-V characteristic, that is, the range of current over which there is both a zero bias and a finite bias solution. Following McCumber, we can define a hysteresis parameter, $\alpha$, as the ratio of the minimum current as the voltage goes to zero to the critical supercurrent. Thus $\alpha$ ranges from 1 in the case of no hysteresis (low $\beta_c$) to 0 in the case of maximum hysteresis (high $\beta_c$).

Figure 2 shows a $\beta_c$ vs $\alpha$ plot for the junctions of Fig. 1; the solid line is the theory. The capacitance was used as a fitting parameter. This fitting capacitance cannot, however, be equated to the Josephson junction capacitance alone because of the additional contributions from the Sn-Insulator-Ag junctions used for shunting. We can, however, note that the fitting capacitance is indeed larger, ~ 800 pf, than the Josephson junction capacitance alone, 500-600 pf.[12]

## MECHANICAL MODEL

Consider a driven, damped simple pendulum, where m is the mass of the bob, g is the acceleration due to gravity, $\ell$ is the length of the pendulum, and $\theta$ is the angle of the bob from vertical. The total torque has three components: (1) the applied torque, $T_a$; (2) the opposing torque from the pendulum bob, $-mg\ell \sin\theta$; (3) the opposing torque from the magnetic damping, $-D(d\theta/dt)$, where D is the damping coefficient. Thus the fundamental equation is:

$$T_a - mg\ell \sin\theta - D\frac{d\theta}{dt} = M\frac{d^2\theta}{dt^2} . \tag{7}$$

By rearranging the terms we obtain:

$$T_a = M\frac{d^2\theta}{dt^2} + D\frac{d\theta}{dt} + mg\ell \sin\theta. \tag{8}$$

Note the exact analogy between the equation for the electrical model, Eq. (4), and this equation for the mechanical model. For the Josephson weak link we are most interested in the time-averaged voltage as a function of applied current. By analogy, for the mechanical model we are most interested in the time-averaged rate of rotation, $\langle d\theta/dt \rangle_t$ as a function of applied torque.

The mechanical model allows us to study the nonlinearities of the motion as it slows down the characteristic periods from on the order of $10^{-10}$ sec to 1 sec. Furthermore, we are able to acquire a better physical intuition from the behavior of this mechanical system than from the electrical system. By studying the motion of the mechanical model, we gain great insight into the behavior of a Josephson weak link.[7]

Figure 3 shows experimental results for "$\beta_c$" = $mg\ell(M/D^2)$ vs $\alpha$. Here $\alpha$ is a hysteresis parameter, defined as the ratio of the minimum torque for which there is a rotating solution to the critical torque $mg\ell$, in exact analogy to the definition of $\alpha$ for the electrical system. We varied m and used M' as a fitting parameter, again in exact analogy to our experimental method for shunted junctions. The solid line gives the theoretical result obtained by McCumber transformed to solve the equation of motion for the mechanical model.

## SUMMARY

The investigation of two models of a Josephson weak link has enabled us to gain new insight into the properties of such links. For the case of low device inductance and a constant current source, both models indicate that the theory of McCumber and Stewart provides a complete description of weak link behavior. Moreover, any device which behaves according to the predicitons of this theory can be assumed to be analyzable by an equivalent circuit similar to the one discussed here. This circuit can then be used to exactly predict the ac and dc response of the device with the only difficult parameter to measure, the device capacitance, determined by a fit of $\alpha$ vs $\beta_c$.

The use of such models, especially the mechanical one, is highly recommended for researchers in this area. It readily provides a simple visual impression of highly complex behavior and gives one a degree of physical intuition for the Josephson mechanism not easily acquired by other means.

## ACKNOWLEDGEMENTS

We wish to thank Ted Fulton for pointing out the importance of making shunted junctions in a low inductance geometry and for suggesting construction of a mechanical model. Paul Richards and Yuan Taur originally made the mechanical model that was modified for use in these experiments. It is a pleasure to acknowledge their good design and craftsmanship. This work was performed under the auspices of the U. S. Atomic Energy Commission. One of us (PKH) was supported by a National Science Foundation Fellowship during the research.

## FIGURE CAPTIONS

Fig. 1. An externally shunted Josephson junction of the type used in our experiments. The outer two S-I-S Josephson junctions are shunted by Sn-Insulator-Ag quasiparticle tunneling junctions.

Fig. 2. Experimental results for the hysteresis parameter $\alpha$ as a function of $\beta_c$ for a junction of the type shown in Fig. 1. $\beta_c$ was varied by decreasing the critical current $i_c$ with a small magnetic field. This field varied from zero for the uppermost point to $\approx 1$ Oe for the lowest point. The solid line is McCumber's theoretical prediction.

Fig. 3. Experimental results for the mechanical model. For this model "$\beta_c$" $= mg\ell M/D^2$ while $\alpha$ was determined as described in the text. The solid line is McCumber's solution.

## REFERENCES

† Present address: Department of Physics, University of California, Santa Barbara, California 93106

1. W. C. Stewart, Appl. Phys. Letters 12, 277 (1968).
2. D. E. McCumber, J. Appl. Phys. 39, 3113 (1968).
3. B. D. Josephson, Phys. Letters 1, 251 (1962); Rev. Mod. Phys. 36, 216 (1964); Advan. Phys. 14, 419 (1965).
4. P. K. Hansma, G. I. Rochlin, and J. N. Sweet, Phys. Rev. B4, 3003 (1971).
5. T. A. Fulton, private communication, and Phys. Rev. Comments and Addenda (to be published).
6. D. B. Sullivan and J. E. Zimmerman, Appl. J. Phys. 39, 1504 (1971).
7. P. K. Hansma and G. I. Rochlin, J. Appl. Phys. (to be published in October 1972).

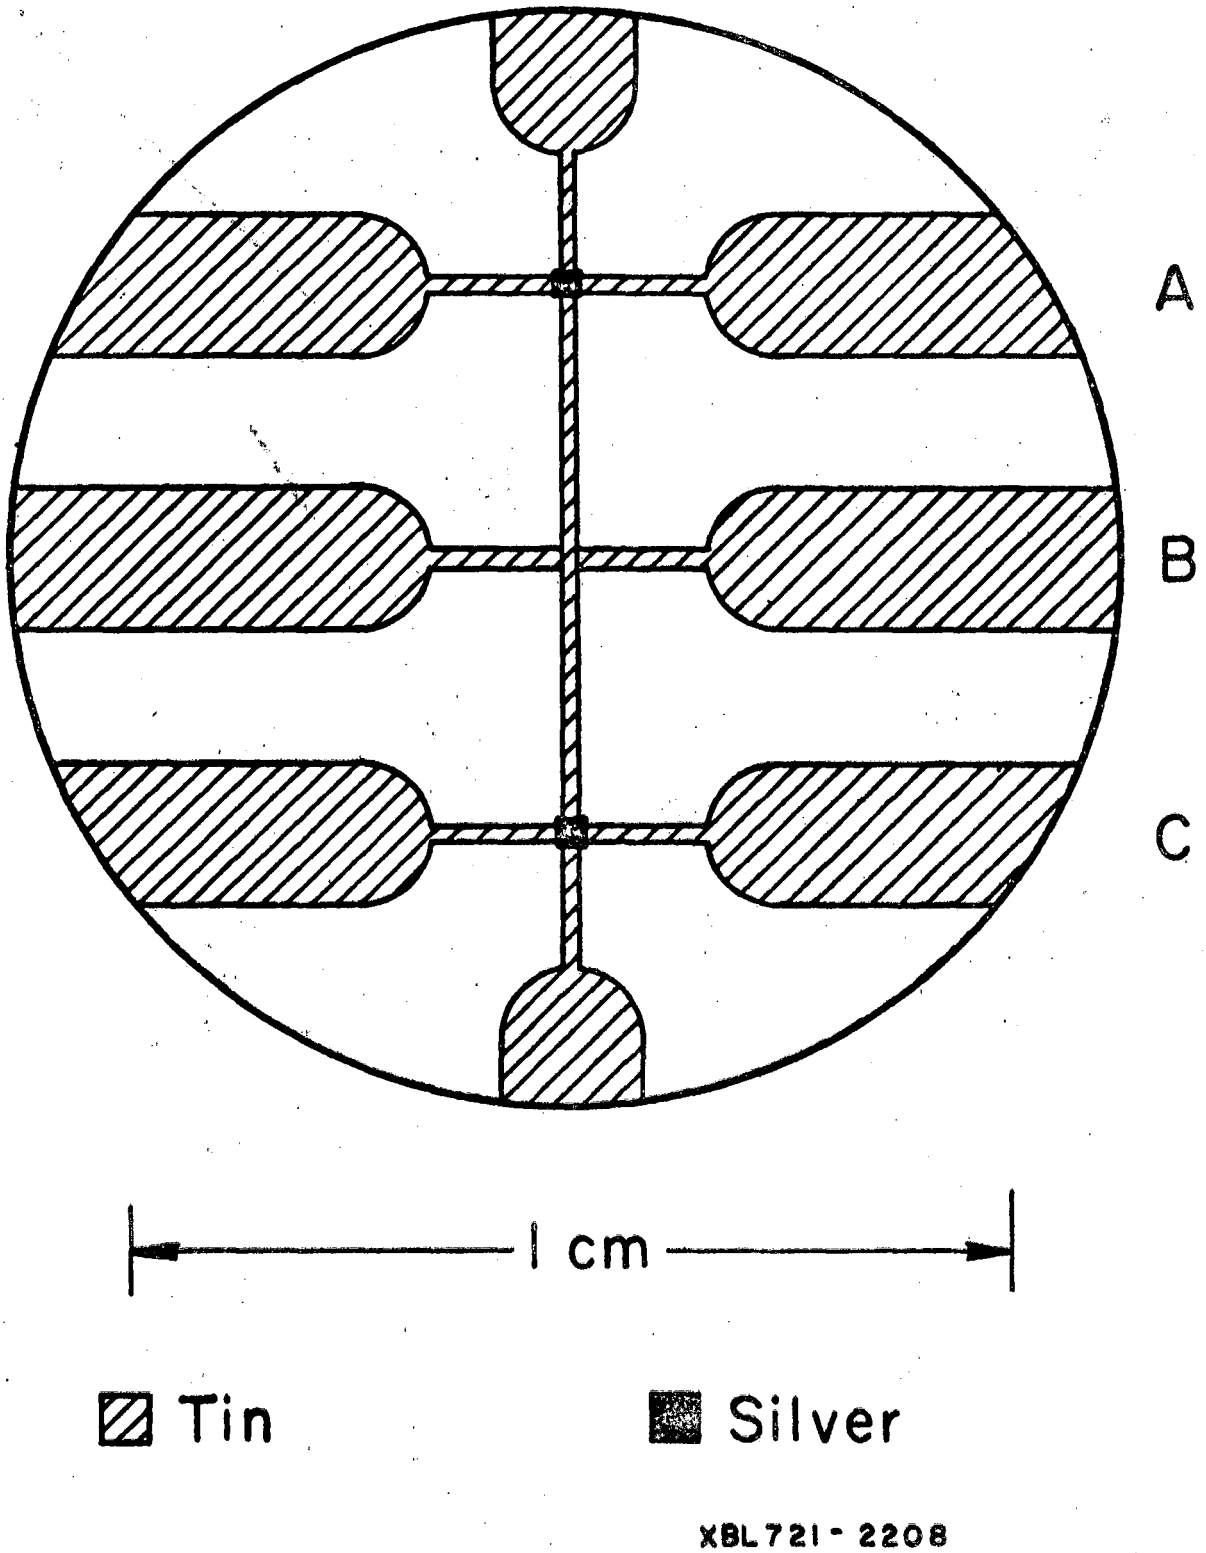


Fig. 1

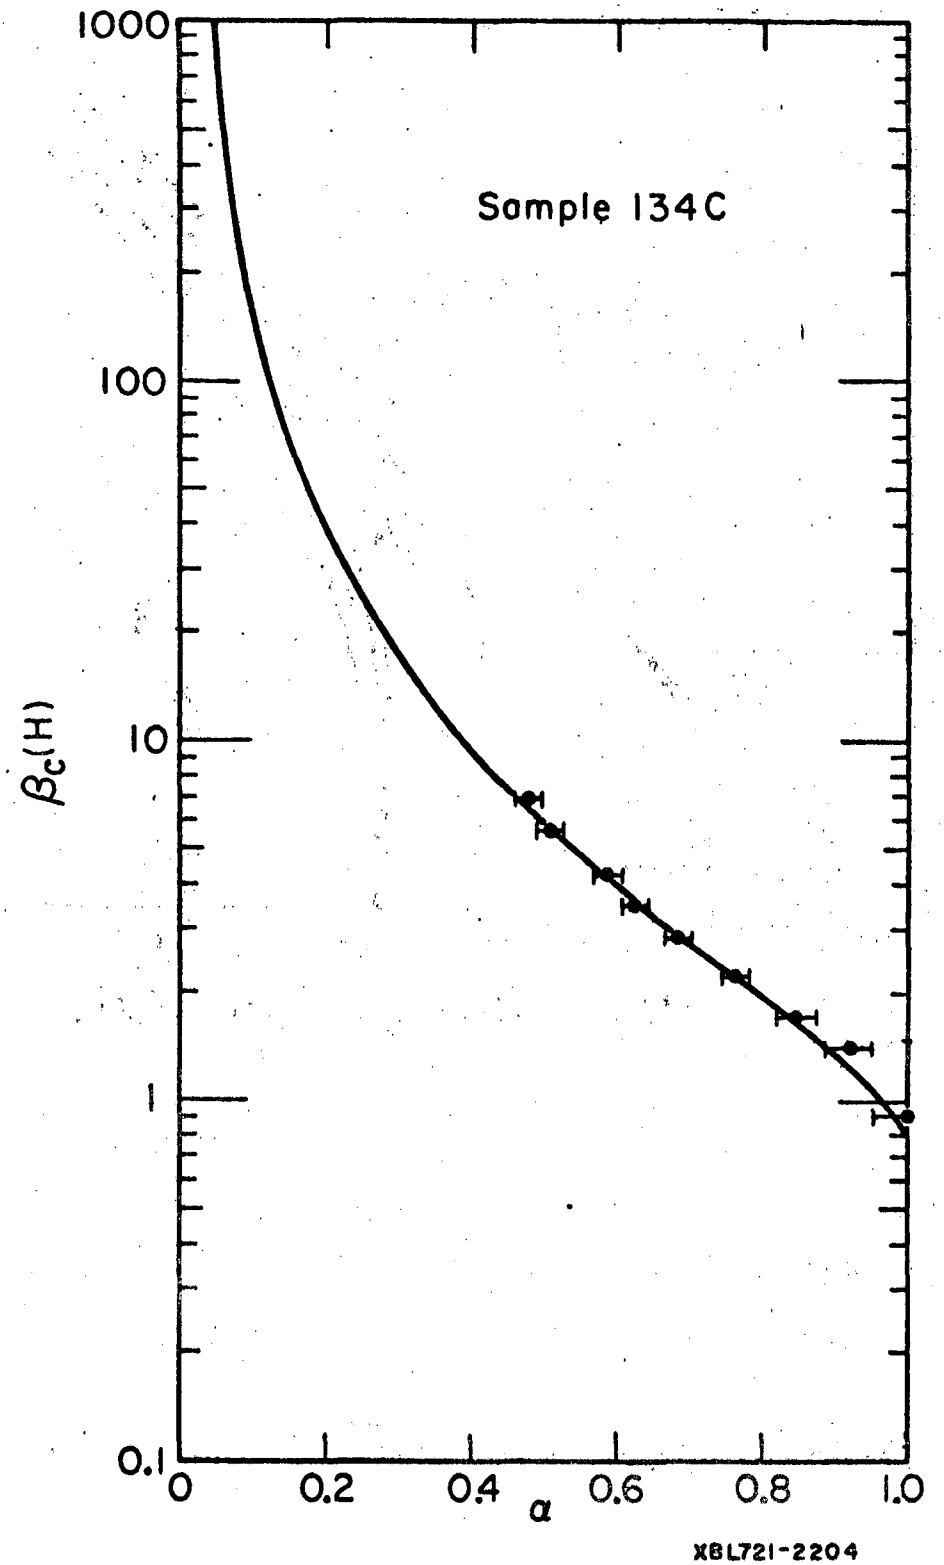
Sample 134C
1000
100
10
1
0.1
$\beta_c(H)$
0
0.2
0.4
0.6
0.8
1.0
$\alpha$
XBL721-2204

Fig. 2

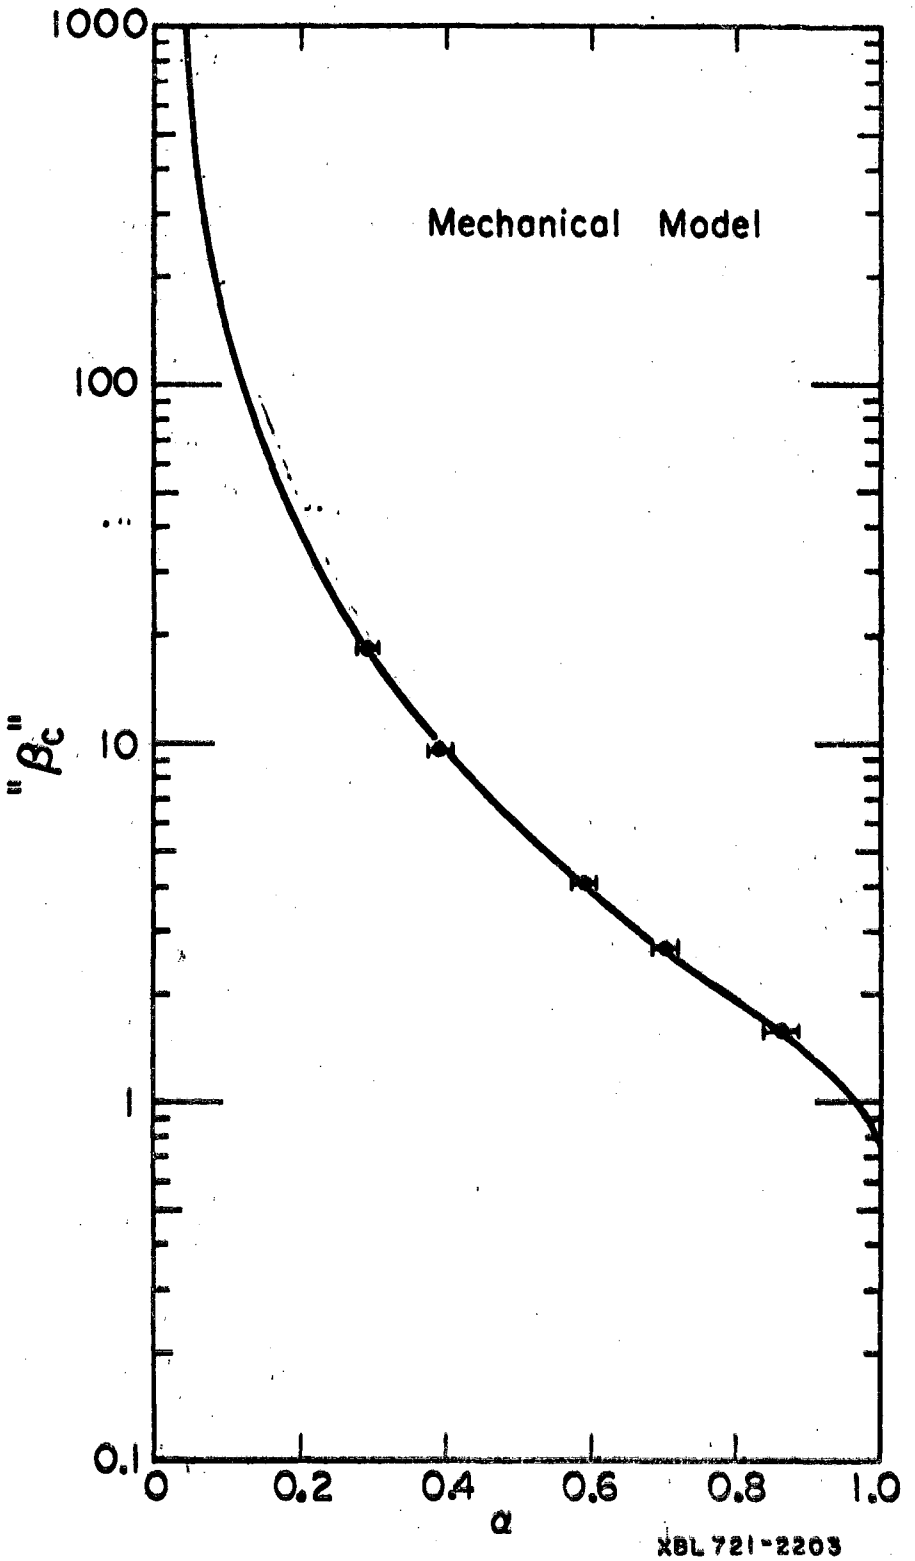
Mechanical Model
1000
100
10
1
0.1
"$\beta_c$"
0
0.2
0.4
0.6
0.8
1.0
$\alpha$
XBL 721-2203

Fig. 3

LEGAL NOTICE

*This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Atomic Energy Commission, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.*

*TECHNICAL INFORMATION DIVISION*
*LAWRENCE BERKELEY LABORATORY*
*UNIVERSITY OF CALIFORNIA*
*BERKELEY, CALIFORNIA 94720*