RECEIVED
LAWRENCE
RADIATION LABORATORY

APR 10 1969

LIBRARY AND
DOCUMENTS SECTION

UCRL-18558
ey. 2

HIGH-QUALITY NARROW QUADRUPOLE MAGNETS

Kenow H. Lou, John M. Hauptman, and James E. Walter

February 22, 1969

TWO-WEEK LOAN COPY

This is a Library Circulating Copy which may be borrowed for two weeks. For a personal retention copy, call Tech. Info. Division, Ext. 5545

LAWRENCE RADIATION LABORATORY
UNIVERSITY of CALIFORNIA BERKELEY

UCRL-18558
ey. 2

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

For National Particle Accelerator Conference,
Washington, D. C., March 1969.

UCRL-18558
Preprint

UNIVERSITY OF CALIFORNIA

Lawrence Radiation Laboratory
Berkeley, California

AEC Contract No. W-7405-eng-48

HIGH-QUALITY NARROW QUADRUPOLE MAGNETS

Kenow H. Lou, John M. Hauptman, and James E. Walter

February 22, 1969

HIGH-QUALITY NARROW QUADRUPOLE MAGNETS*

Kenow H. Lou, John M. Hauptman, James E. Walter
Lawrence Radiation Laboratory
University of California
Berkeley, California

Summary

Two sizes of narrow quadrupole magnets (8 and 12 in. diam) have been designed and built at Berkeley for use in Bevatron experiments. The quadrupole magnets have a small width for the given aperture, so two or more secondary beams can look at the same target at small production angles. The computer program RNIL[1] was used to develop the pole-tip contour, and the resulting design produced a quadrupole with very small harmonic content. Measurements of the line integral for the 8-in. quadrupole at a gradient of 2800 G/in., measured at a radius of 3.67 in., give harmonic contents, expressed as per cent of second harmonic, of 0.1% for the sixth, $\leq$0.03% for the tenth, and 0.05% for the fourteenth.

Design Objectives

The design objectives for the narrow quadrupoles were: (1) They should use the same coils as the existing 8QB and 12QB type Berkeley quadrupoles. (2) They should have the same aperture as these existing quadrupoles. (3) They should be as narrow as the existing coils would permit. (4) The pole contour should be redesigned to reduce the excessive 6th harmonic present in the QB type magnets.

Pole-Face Contour Design

The pole-face contours were designed using the computer program RNIL. RNIL is a general, two-dimensional, linear optimization program which assumes infinitely permeable iron. The boundary conditions then imply that lines of flux are everywhere normal to the iron, and symmetry demands that lines of flux be normal to certain planes of symmetry that are specified for each magnet type. The main subroutine of RNIL, named PISA (Program for Inversion of System Analysis) and described in detail in Ref. 1, inverts the forward program to find a set of pole-tip coordinates which minimize the sum of the weighted squares of the deviations between the desired and calculated magnetic fields at various specified points in the aperture.

The 32-in-long, 8-in.-diam (8QN32) and the 24-in.-long, 12-in.-diam (12QN24) narrow quadrupoles have been measured, and the following tables compare the measured and calculated harmonic contents. Table II compares the harmonics of the total line integral for the 8QB32 and the 8QN32 quadrupoles. Table III compares the calculated harmonics, assuming an infinitely long magnet, with the measured harmonics of the line integral over the central 8 in. for the 8QN32 magnet. Table IV compares the measured harmonics of the total line integral, the measured harmonics of the line integral of the central 8 in., and the calculated harmonics, assuming infinitely long iron, for the 12QN24 magnets.

Fabrication

The magnet cores are made up of four identical solid steel slabs which were Blanchard-ground to size and contoured on a shaper. The contour was controlled by matching to a gage produced on a numerical-control mill to a tolerance of $\pm$ 0.0005 in. The resulting contour produced by the shaper was within $\pm$ 0.002 in. of the desired calculated curve. Table V and Fig. 1 give some of the coordinates used to produce the contours. In making the gage, coordinates were given at about 0.005-in. spacing, and a smooth curve was produced between the points. The utilities are underneath the magnet, leaving the sides and ends as clear as possible to permit close packing. Figure 2 shows the basic dimensions of the magnet.

References

1. Klaus Halbach, A Program for Inversion of System Analysis and Its Application to the Design of Magnets, UCRL-17436; submitted to 2nd International Conference on Magnet Technology, Oxford University, England, July 1967.

Table I
Maximum design values.

	8QN		12QN	
Length (in.)	16	32	24	48
I (A)	2750	2750	2750	2750
V (volts)	53	93	73	126
$\frac{\delta B}{\delta r}$ (kG/in.)	3.6	3.6	2.4	2.4

*Work performed under auspices of U. S. Atomic Energy Commission.

Table II.

Total line integral of magnetic field at r=3.7 in.

	Harmonics in % of second			
	6th	10th	14th	other
8QB $\frac{\delta B}{\delta r}$ = 2500 G/in.	0.35	0.05	0.05	~0.0
8QB $\frac{\delta B}{\delta r}$ = 3000 G/in.	0.36	0.04	0.05	~0.0
8QN $\frac{\delta B}{\delta r}$ = 1400 G/in.	0.07	< 0.02	0.03	< 0.02
8QN $\frac{\delta B}{\delta r}$ = 2800 G/in.	0.10	< 0.03	0.05	< 0.03

Table III.

Line integral over central 8 in. of 32 in. quad.

$\frac{\delta B}{\delta r}$ = 3000 G/in. I = 2200 A r = 3.67 in.

	Harmonics in % of second			
	6th	10th	14th	other
8QN (calculated)	0.001	0.0004	~ 0.0	~0.0
8QN32 (measured)	0.008	0.003	0.004	< 0.005

Table IV.

12QN24 $\frac{\delta B}{\delta r}$ = 2400 G/in. I = 2750 A r = 5.67 in.

	Harmonics in % of second			
	6th	10th	14th	other
12QN24 measured total line integral	0.484	0.019	0.025	<0.015
12QN24 measured line integral of center 8 in.	0.095	0.024	0.009	<0.015
12QN calculated	0.001	0.0004	~ 0.0	~0.0

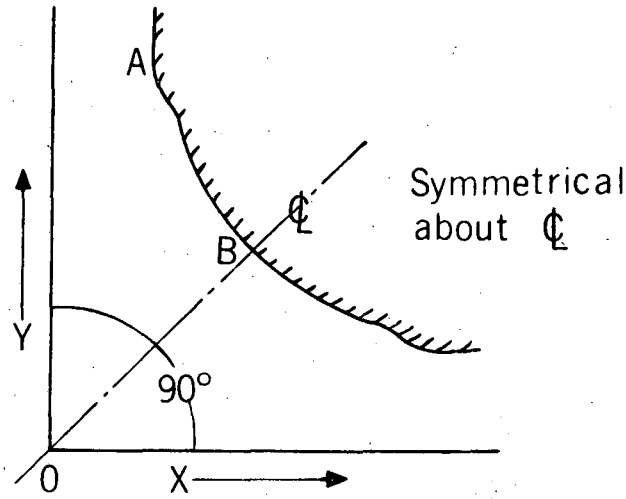

Fig. 1. Contour coordinates.

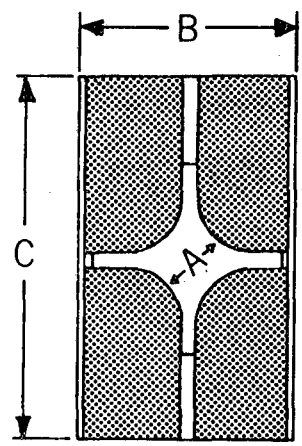

Fig. 2. Basic dimensions (in.)

	8QN	12QN
A	8.244 diam	12.369 diam
B	24.0	35.0
C	40.0	60.0

Table V. Pole-tip contour. x-y Coordinates, Pt. A to B.

8QN				12QN					
x	y	x	y	x	y	x	y	x	y
1.516	5.400	2.047	4.150	2.250	8.175	2.817	6.925	3.444	5.550
1.529	5.275	2.113	4.025	2.258	8.050	2.840	6.800	3.524	5.425
1.582	5.175	2.180	3.900	2.275	7.975	2.862	6.675	3.607	5.300
1.636	5.100	2.250	3.775	2.303	7.900	2.902	6.550	3.694	5.175
1.689	5.025	2.330	3.650	2.360	7.800	2.959	6.425	3.786	5.050
1.762	4.900	2.411	3.525	2.462	7.675	3.028	6.300	3.882	4.925
1.817	4.775	2.500	3.400	2.566	7.550	3.098	6.175	3.983	4.800
1.861	4.650	2.595	3.275	2.652	7.425	3.163	6.050	4.090	4.675
1.893	4.525	2.698	3.150	2.716	7.300	3.229	5.925	4.202	4.550
1.926	4.400	2.810	3.025	2.760	7.175	3.297	5.800	4.320	4.425
1.980	4.275	2.915	2.915	2.790	7.050	3.369	5.675	4.373	4.373

LEGAL NOTICE

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or

B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.

TECHNICAL INFORMATION DIVISION
LAWRENCE RADIATION LABORATORY
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720