Submitted to Physical Review

RECEIVED
LAWRENCE
RADIATION LABORATORY

LIBRARY AND
DOCUMENTS SECTION

UCRL-20355
Preprint c.2

TUNABLE FAR-INFRARED RADIATION GENERATED FROM THE DIFFERENCE FREQUENCY BETWEEN TWO RUBY LASERS

D. W. Faries, P. L. Richards, Y. R. Shen,
and K. H. Yang

October 1970

AEC Contract No. W-7405-eng-48

TWO-WEEK LOAN COPY

This is a Library Circulating Copy which may be borrowed for two weeks. For a personal retention copy, call Tech. Info. Division, Ext. 5545

UCRL-20355 c.2

LAWRENCE RADIATION LABORATORY
UNIVERSITY of CALIFORNIA BERKELEY

34

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

Submitted to The Physical Review

UCRL-20355
Preprint

UNIVERSITY OF CALIFORNIA

Lawrence Radiation Laboratory
Berkeley, California

AEC Contract No. W-7405-eng-48

TUNABLE FAR-INFRARED RADIATION GENERATED FROM THE DIFFERENCE FREQUENCY BETWEEN TWO RUBY LASERS

D. W. Faries*, P. L. Richards, Y. R. Shen, and K. H. Yang

October 1970

Tunable Far-Infrared Radiation Generated from the Difference Frequency Between Two Ruby Lasers

D. W. Faries*, P. L. Richards, Y. R. Shen, and K. H. Yang

Department of Physics, University of California
and
Inorganic Materials Research Division,
Lawrence Radiation Laboratory,
Berkeley, California 94720

ABSTRACT

Far-infrared radiation generated from the difference frequency between two temperature-tuned ruby lasers operated on the R_1 and R_2 transitions has been observed. This radiation is continuously tunable over the frequency range from 20 to 38 cm^{-1}. Lithium niobate was used as a mixing crystal. The expected frequencies of the far-infrared radiation were measured using a Fabry-Perot interferometer. The phase matching conditions were also verified.

In a previous paper we described the generation of tunable far-infrared radiation over the frequency range from 1.5 to 8.1 cm^{-1} by beating two temperature-tuned ruby laser beams in a nonlinear crystal.[1] By operating one laser on the R_1 transition and the other on the R_2 transition, we have now obtained tunable radiation from 20 to 38 cm^{-1}. In order to produce laser action on the R_2 transition,[2-4] we used essentially a Lyot-Ohman[5,6] filter in the laser cavity to discriminate against the R_1 transition.[7] The power output of the R_2 laser was about 1/2 MW compared with the 1 MW output of the R_1 laser. Lithium niobate was used for the non-linear crystal. The additional experimental apparatus and the measurement technique were essentially the same as described earlier.[1]

If both lasers are operated at room temperature, the difference-frequency radiation generated should be at 29 cm^{-1}. In order to phase-match this difference-frequency generation process, a 1.5 mm. slice of $LiNbO_3$ was cut with the c-axis tilted approximately 18° away from the normal to the surface. The frequency of the far-infrared output was measured using a Fabry-Perot interferometer with electroformed metal mesh mirrors. The measured transmission curve[8] of the Fabry-Perot interferometer is compared in Fig. 1(a) to a theoretical curve calculated for a frequency of 28.8 cm^{-1}. Since the interferometer has a finesse of about 4, the spectral purity of the far-infrared radiation could not be measured. In Fig. 1(b) the Fabry-Perot transmission is shown for radiation generated with the R_1 laser at room temperature and the R_2 laser at -23°C. The calculated transmission for 35.8 cm^{-1}, the

frequency expected from the known temperature dependence of the R_2 transition, is also shown.[9] The same $LiNbO_3$ crystal was used, but it was oriented for phase matching at 35.8 cm^{-1}.

The phase matching curve for production of the difference frequency at 29 cm^{-1} is shown in Fig. 2. The absorption coefficient for $LiNbO_3$ at 29 cm^{-1} is 18 cm^{-1}.[10] Normalized theoretical curves obtained by solving Maxwell's equations in the plane wave approximation, with and without absorption,[1,11] are shown for comparison. The effect of absorption changes the width at half-maximum very little, but shows a definite difference at the wings of the curves. The shapes of the curves would not be changed appreciably by including diffraction and boundary conditions. The observed peak power in this case was about 5 mW, compared with a previously observed value of ~ 1mW at 8.1 cm^{-1} from a 0.47 mm. thick crystal.[1]

From the simple theory with plane-wave approximation, we expect an ω^2 dependence of the far-infrared output power on frequency. Since the extinction length at 29 cm^{-1} is 0.055 cm, as compared to crystal length of 0.47 cm in the 8.1 cm^{-1} case, we estimate that the power at 29 cm^{-1} should be about 15 times the power at 8.1 cm^{-1} for the same laser power. Computer calculations[11] including the effects of absorption, diffraction, boundary conditons, the spatial distribution and mode structure of the laser light, the birefringent property of the $LiNbO_3$ crystal, and the collection angle of the detector gives a factor of 12. Since the power of the R_2 transition laser is a factor of about two less than that of

the R_1 transition, the complete theory predicts a factor of 6 compared to the factor 5 observed. This result seems satisfactory considering the uncertainties in our experiment.[11] The absolute value of the power obtained at 8.1 cm^{-1} was shown to agree with theory in the previous paper.

The tunable range of the far infrared radiation produced by the beating between R_1 and R_1 lasers and between R_1 and R_2 lasers could be easily extended from 0 to 50 cm^{-1} by using liquid nitrogen as a coolant. Other systems might enlarge the range of tunability. Many tunable laser sources exist which can be used to produce difference frequency radiation. Among the more promising are the dye lasers,[12] the spin-flip Raman lasers,[13] stimulated polariton scattering,[14] and parametric oscillators.[15] A system using two dye lasers could be tuned over the entire far infrared region. The power, linewidth, and divergence will perhaps never be as good as the ruby laser, but they may be adequate for some applications. Improvements in the ruby laser sources, particularly the divergence, should produce a significant increase in far infrared power. We can also increase the power by choosing the optimum focusing of the lasers into the crystal, provided that damage can be avoided. It seems clear that this tunable far infrared radiation source could be used for spectroscopy in the 1 to 50 cm^{-1} region, especially for saturation and other non-linear phenomena which require large peak power.

ACKNOWLEDGEMENTS

This work was performed under the auspices of the Office of Naval Research and the U. S. Atomic Energy Commission.

REFERENCES

* Department of Physics, Wheaton College, Wheaton, Illinois 60187

1. D. W. Faries, K. A. Gehring, P. L. Richards, and Y. R. Shen, Phys. Rev. 180, 363 (1969).
2. T. Yajima and K. Inoue, Physics Letters 26A, 281 (1968).
3. C. J. Hubbard and E. W. Fisher, Appl. Optics 3, 1499 (1964).
4. J. A. Calviello, E. W. Fisher, and Z. H. Heller, IEEE J. Quantum Electronics (correspondence) QE-I, 132 (1965).
5. B. Lyot, Compt. Rend. 197, 1593 (1933).
6. Y. Ohman, Nature 141, 291 (1938).
7. D. W. Faries and Y. R. Shen, Rev. of Sci. Instr. 41, 216 (1970).
8. Our previously published measurement of the transmission of a Fabry-Perot interferometer at 8.1 cm^{-1} shows a marked decrease of the height of the interference maxima with order number (Ref. 1). This effect arises from the diffraction spread of the beam corresponding to a cross section of 0.2 cm^2 in the crystal. The interference plates vignette the spreading beam for large separation. At high frequencies the beam spread (~ 9° half angle at 29 cm^{-1}) causes negligible vignetting.
9. D. E. McCumber and M. D. Sturge, J. Appl. Phys. 34, 1682 (1963).
10. D. R. Bosomworth, Appl. Phys. Letters 9, 330 (1966); J. G. Bergman, A. Ashkin, A. A. Ballman, J. M. Dziedzic, H. J. Levinstein, and R. G. Smith, Appl. Phys. Letters 12, 92 (1968).
11. D. W. Faries, Ph.D. Thesis 1969, Dept. of Physics, U.C., Berkeley (unpublished).
12. P. P. Sorokin, J. R. Lankard, E. C. Hammond, V. L. Mouzzi, IBM Journal 11, 130 (1967).

13. C. K. N. Patel, E. D. Shaw, and R. J. Kerl, Phys. Rev. Letters 25, 8 (1970).

14. J. Gelbwachs, R. H. Pantell, H. E. Puthoff, and J. M. Yarborough, Appl. Phys. Letters 14, 258 (1969).

15. J. A. Giordmaine and R. C. Miller, Phys. Rev. Letters 14, 973 (1965).

FIGURE CAPTIONS

Fig. 1(a) Fabry-Perot scan of difference-frequency output using R_1 and R_2 lines. The first scan (a) shows a difference frequency of 28.8 cm^{-1}; the second scan (b) shows 35.8 cm^{-1}. The solid curve is calculated from the dimensions of the wire grid interferometer and from the difference frequency expected from the laser temperature.

Fig. 2. Phase-matching curve for 29 cm^{-1} in 0.15 cm $LiNbO_3$ crystal. The dashed line is $\left(\frac{\sin\eta}{\eta}\right)^2$, the theoretical curve for no absorption. The solid line is the theoretical curve including an absorption coefficient of $\alpha = 18\ cm^{-1}$.

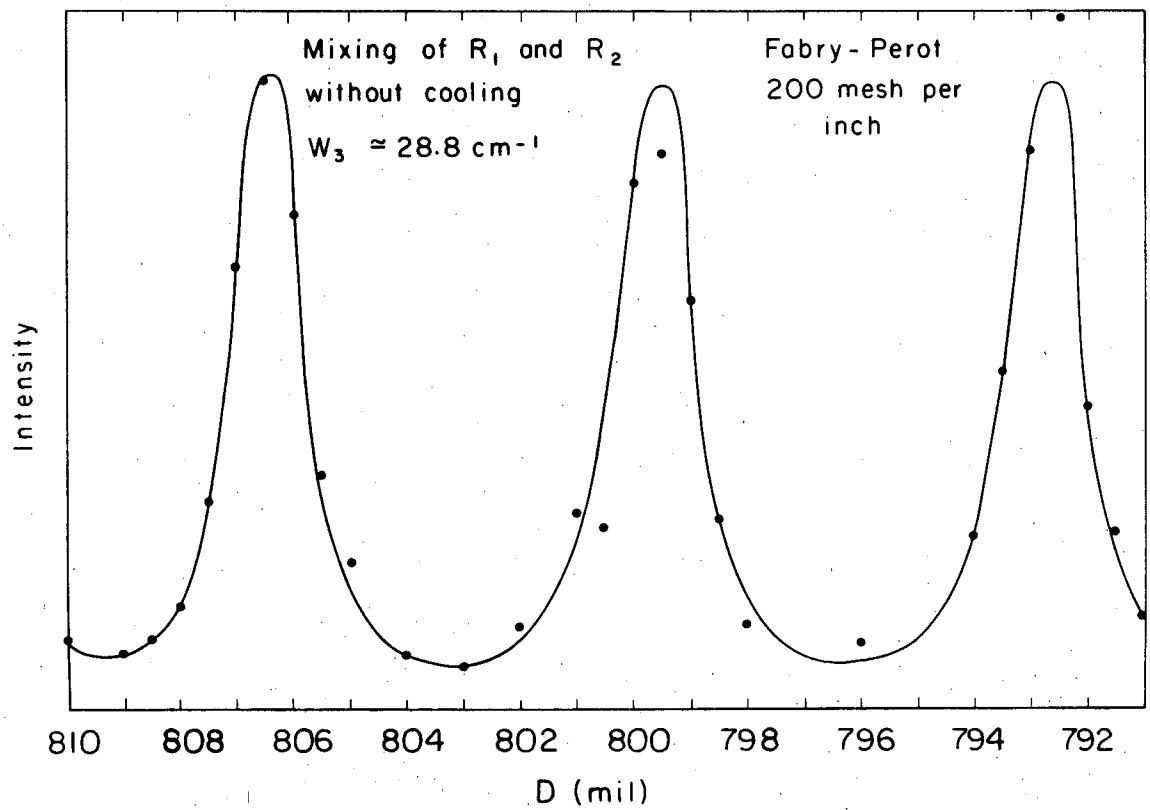

XBL693- 2226

Fig. 1(a)

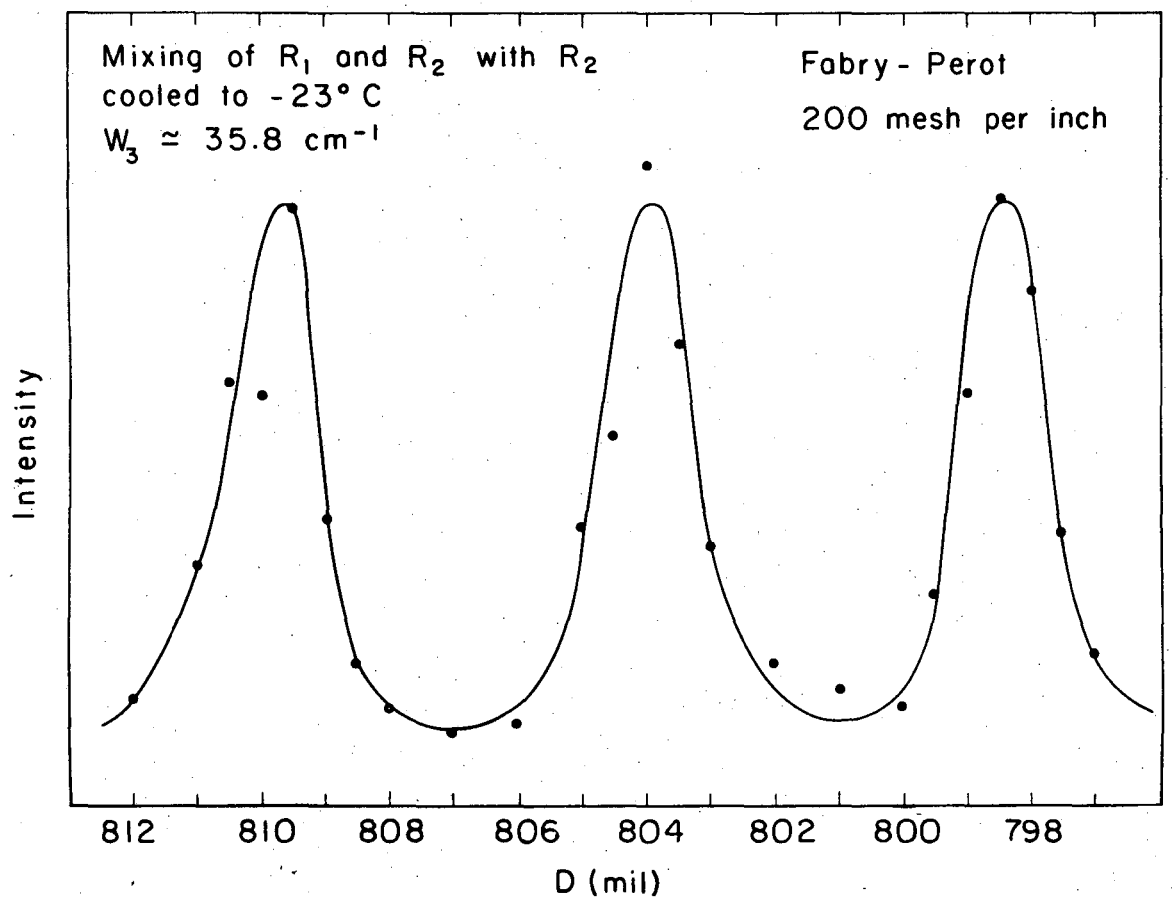

XBL693 - 2224

Fig. 1(b)

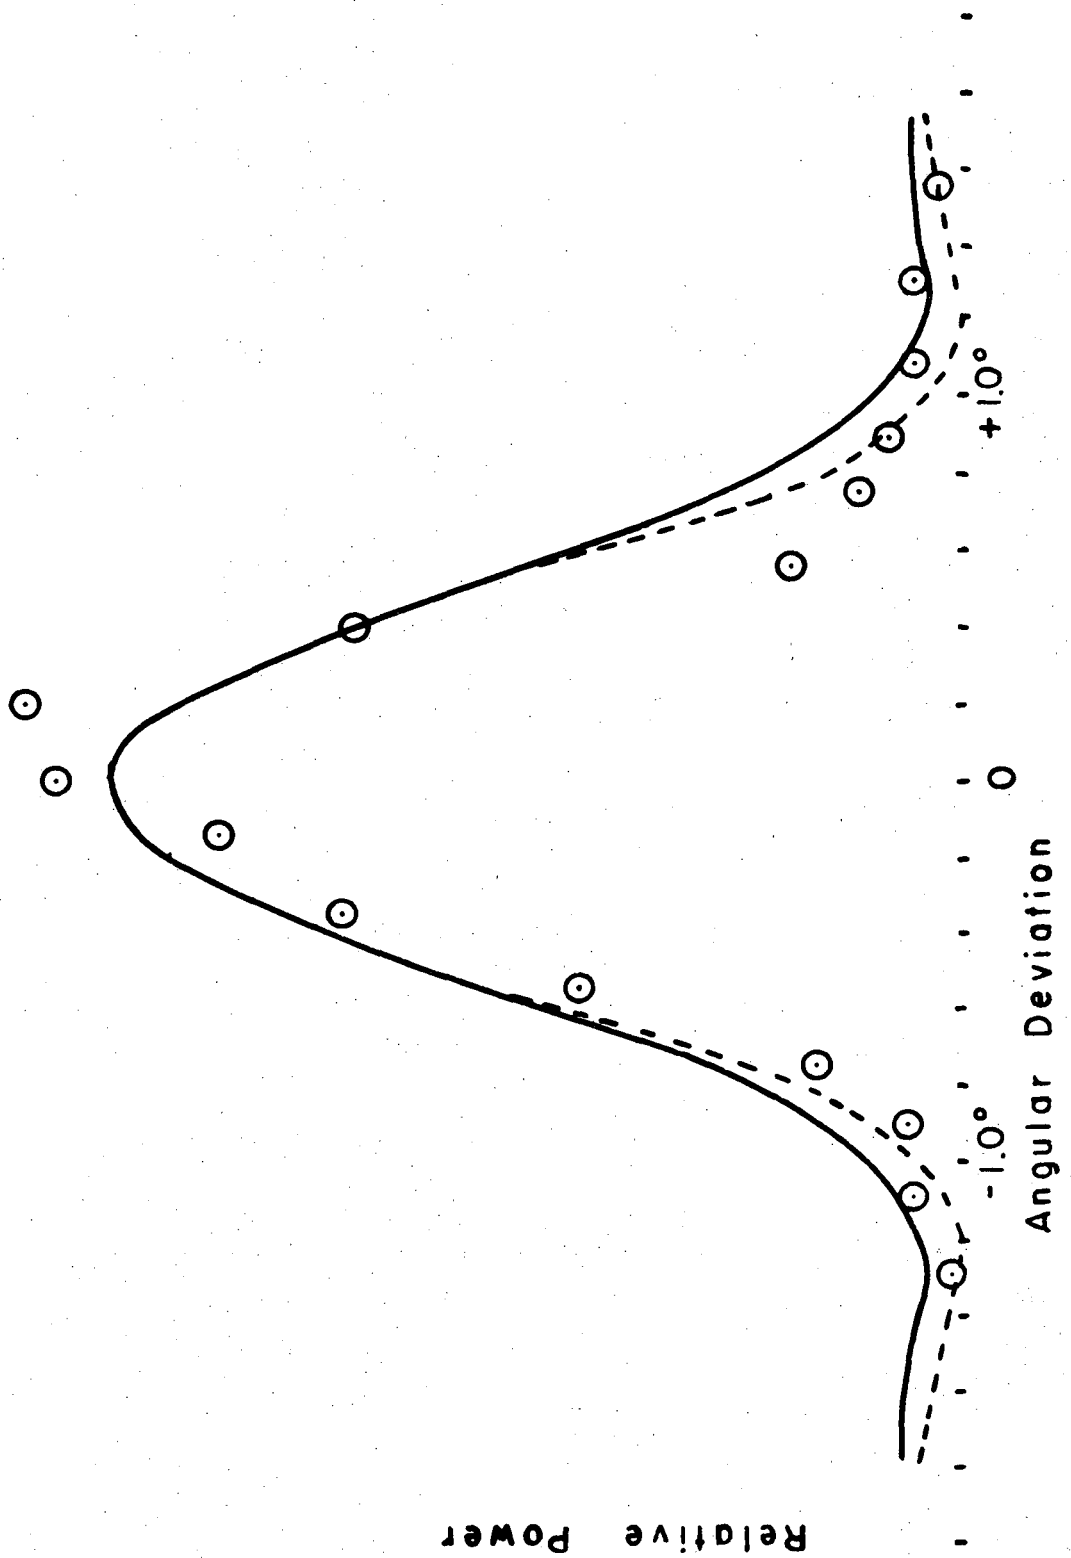

XBL 698-1127

Fig. 2

LEGAL NOTICE

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or

B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.

TECHNICAL INFORMATION DIVISION
LAWRENCE RADIATION LABORATORY
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720