UCRL-3421
Physics Distribution

UNIVERSITY OF CALIFORNIA
Radiation Laboratory
Berkeley, California

Contract No. W-7405-eng-48

CRYOGENIC DATA BOOK

Dudley B. Chelton and Douglas B. Mann
National Bureau of Standards
Cryogenic Engineering Laboratory
Boulder, Colorado

May 15, 1956

Printed for the U. S. Atomic Energy Commission

PREFACE

Increased activities in Cryogenic Engineering have brought about the need for a compilation of available data. The purpose of the Cryogenic Data Book is to provide a condensed source of reliable data and reference information for those working in the cryogenic field. Specifically the data were compiled with a view toward the design of liquid hydrogen bubble chambers.

The compilation does not constitute a critical survey of the literature. It is hoped that additional information can be added in the future.

For their aid in compiling this book, the authors wish to thank Rod. A. Byrns and Homer S. Hoard, both of the University of California Radiation Laboratory.

This work was done under the auspices of the U. S. Atomic Energy Commission.

CRYOGENIC DATA BOOK

Chelton and Mann

Contents

I. PROPERTIES OF LIQUIDS

A. Liquid Hydrogen

Heat of Vaporization 8
Heat of Conversion 9
Para Concentration 9
Ortho-Para Concentration at Equilibrium 9A
Viscosity 10
Specific Heat 11
Surface Tension 12
Density 13
Relative Density - Liquid/gas equil 14
Relative Density - Liquid/gas STP 15
Percent Liquefaction - Liquefier 16
Percent Liquefaction - Refrigerator 17
Loss Due to Flashing 18
Vapor Pressure 19
Dielectric Constant 20
Vapor Pressure HD 21
Thermal Conductivity H_2 86

B. Liquid Deuterium

Density 22
Relative Density - Liquid/gas equil 23
Dielectric Constant 24
Specific Heat 25
Surface Tension 26
Thermal Conductivity 27
Viscosity 28
Vapor Pressure 29
Heat of Vaporization 30

C. Liquid Nitrogen

Density of Liquid 31
Relative Density - Liquid/gas STP 32
Percent Liquefaction - Liquefier 33
Loss Due to Flashing 34
Vapor Pressure 35
Heat of Vaporization 36

D. Liquid Oxygen

Heat of Vaporization 36
Density 37

E. Mixtures of O_2 - N_2

Heat of Vaporization - Air 36
Equilibrium liquid - gas 38
Melting Diagram 39

F. Liquid Helium

Percent Liquefaction - Liquefier 40, 40A
Heat of Vaporization 41
Heat of Fusion 42
Viscosity 43
Specific Heat 44
Surface Tension 45
Density of Liquid 46
Relative Density - liquid/gas STP 47
Thermal Conductivity 48
Vapor Pressure 49

G. Liquid Heat Transfer

Hydrogen 50
Nitrogen 51

II. PROPERTIES OF GASES

A. Hydrogen

T-S Diagram 52, 53, 54
Enthalpy - 1 atm 55
Sound Velocity 56
Density 57
Thermal Conductivity 58
Thermal Conductivity of Para H_2 and Normal H_2 59
Specific Heat Cp 60
Specific Heat Ratio 61
Viscosity 62
Prandtl Number 63

B. Nitrogen

T-S Diagram N_2 64
T-S Diagram Air 65
Enthalpy 66
Sound Velocity 67
Density 68
Thermal Conductivity 69
Specific Heat Cp 70
Specific Heat Ratio 71
Viscosity 72
Prandtl Number 73

C. Deuterium

Viscosity 74
Enthalpy 75
Density 76

D. Helium

T-S Diagram 77
P-H Diagram 77A
Sound Velocity 78
Density 79
Thermal Conductivity 80
Specific Heat Cp 81
Viscosity 82
Prandtl Number 83
Specific Heat Ratio 84

E. Oxygen

Thermal Conductivity as a Function of Temperature 84A

III. PROPERTIES OF SOLIDS

A. Specific Heat - Metals 85

B. Thermal Conductivity 86

C. Thermal Expansion of Metals 87

D. Thermal Expansion of Plastics 88

E. Thermal Expansion of Glass 88A

F. Tensile Strength

Aluminum Alloys 89, 89A
Beryllium Copper 89B
OFHC Copper 89C
Everdur 89D
Phosphor Bronze 89D
Stainless Steels 89, 89E, 89F, 89G

G. Yield Strength

Aluminum Alloys 90A
Beryllium Copper 89B
OFHC Copper 89C
Everdur 89D
Phosphor Bronze 89D
Stainless Steels 90, 89E, 89F, 89G

H. Impact Resistance

Stainless Steel 90B
Aluminum Alloy 90C

I. Breaking Strength of Glass

Borosilicate Crown-2 . . . . . 90D

IV. INSULATION

A. Emissivities of Materials 91

B. Change in Effective Emissivity 92

C. Radiant Heat Transfer, 300° - 77°K 93

D. Radiant Heat Transfer, 77° - 20°K 94

E. Styrofoam 95, 96

F. Gaseous Conduction at Low Pressure, 300° - 77°K 97
Gaseous Conduction at Low Pressure, 77° - 20°K 97

G. Sanocel 98

H. Pearlite 99

V. THERMOCOUPLE EMF

A. Copper vs. Constantan

Range 150-290K Junction 273°K 100
Range 20-160K Junction 273°K 101
Range 70-300K Junction 77.4°K 102
Range 20- 85K Junction 20.4°K 103
Range 20- 30K Junction 20.4°K 104

B. Gold Cobalt vs. Copper 105

VI. MISCELLANEOUS

A. Gas Flow-Pressure Drop in Pipe

Hydrogen Gas at 1 atmos 106
Hydrogen Gas at 100 psig 107
Hydrogen Gas at 2200 psig 108
Nitrogen Gas at 0.1 atmos 109

B. Water Content of Gases

Hydrogen 110

C. Stainless Steel Characteristics 111

D. Fluid Properties 112

E. Boiling Points of Gases 113

F. Vapor Pressure of Ice 114

G. Water Vapor Adsorption 115

H. Adsorption of N_2 on Silica Gel 116

CONVERSION TABLES

Quantity	Multiply quantity expressed in	by	To obtain quantity expressed in
Viscosity	micropoise	1×10^{-6}	$\frac{g}{cm\ sec}$
	micropoise	6.73×10^{-8}	$\frac{lb(m)}{ft\ sec}$
Density	g/liter	6.24×10^{-2}	lb/ft^3
Heat Transfer	$watts/cm^2$	927	$watts/ft^2$
Sound Velocity	meters/sec	3.28	ft/sec
Thermal Conductivity	watts/cm ^oK	2.54	watts/in ^oK
		57.8	$\frac{BTU\ ft}{ft^2\ hr\ ^oF}$
Specific Heat	$\frac{watts - sec}{g\ ^oK}$	454	$\frac{watts - sec}{lb\ ^oK}$
		0.239	$\frac{cal}{g\ ^oK}$
		0.239	$\frac{BTU}{lb\ ^oF}$

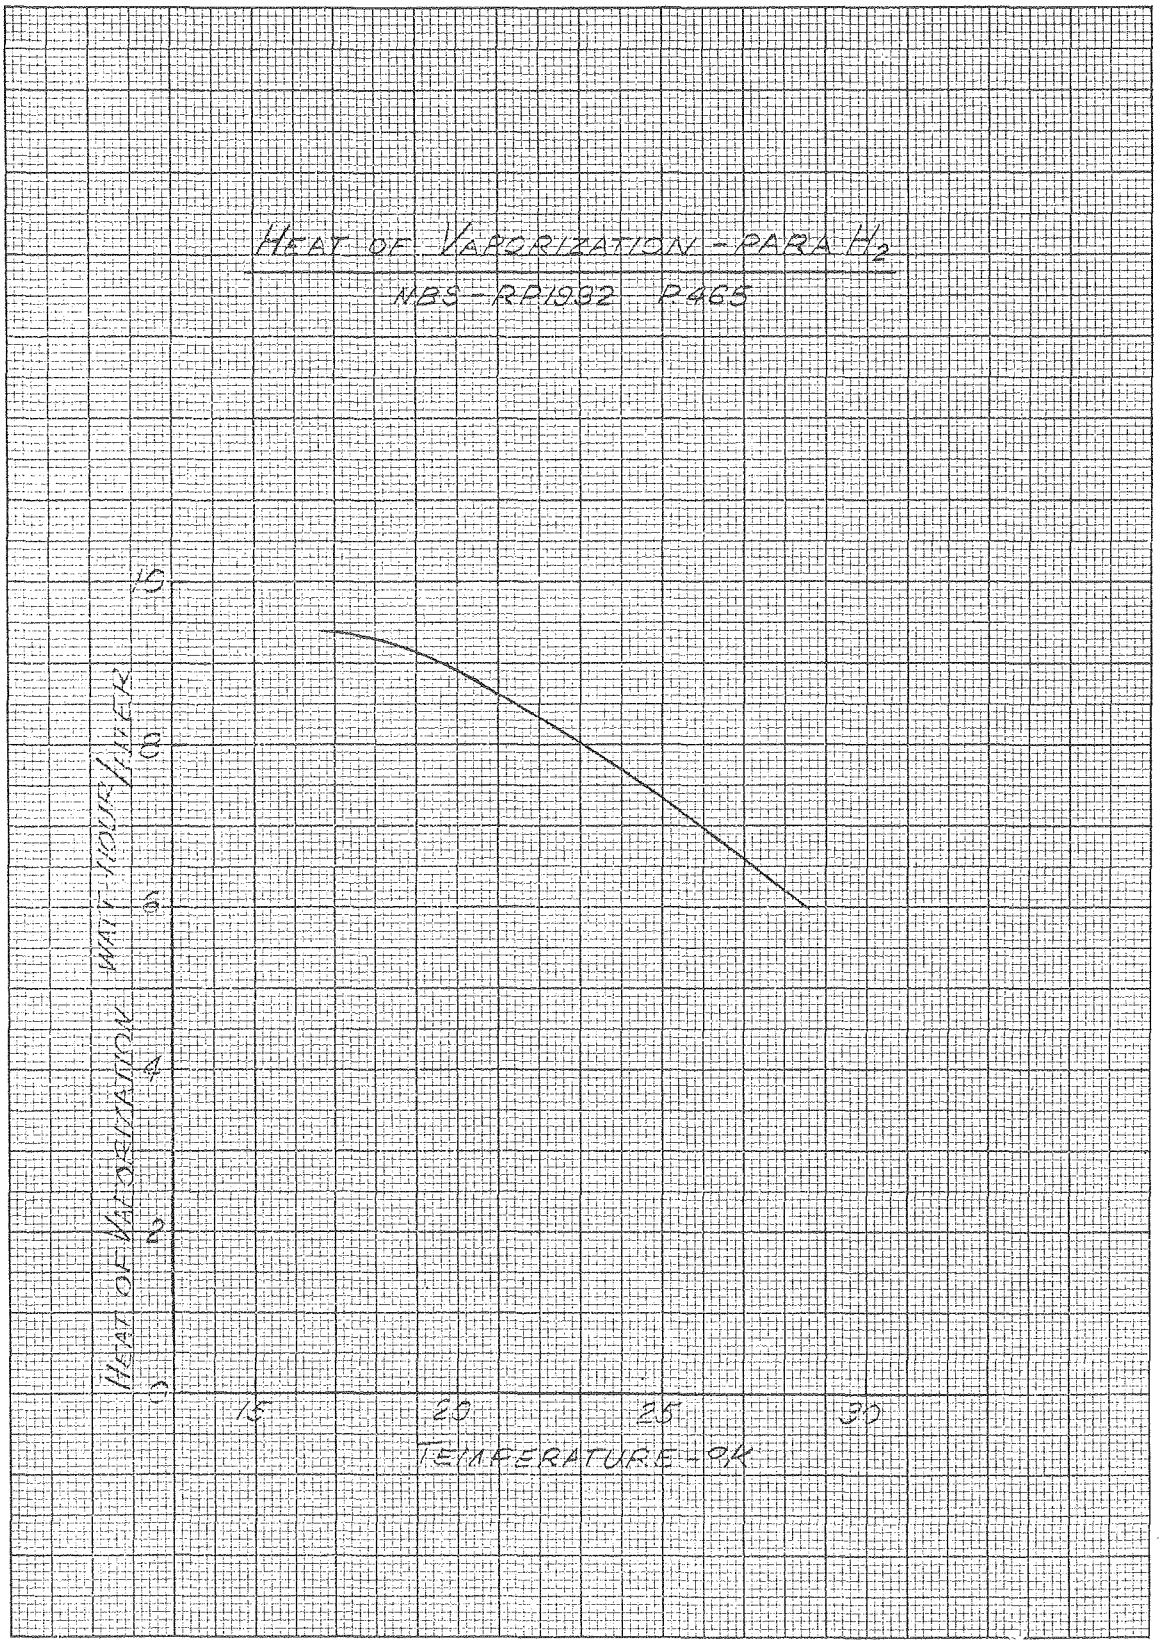
HEAT OF VAPORIZATION - PARA H_2
NBS - RP1932 P465
HEAT OF VAPORIZATION WATT-HOUR/LITER
0
2
4
6
8
10
15
20
25
30
TEMPERATURE - °K

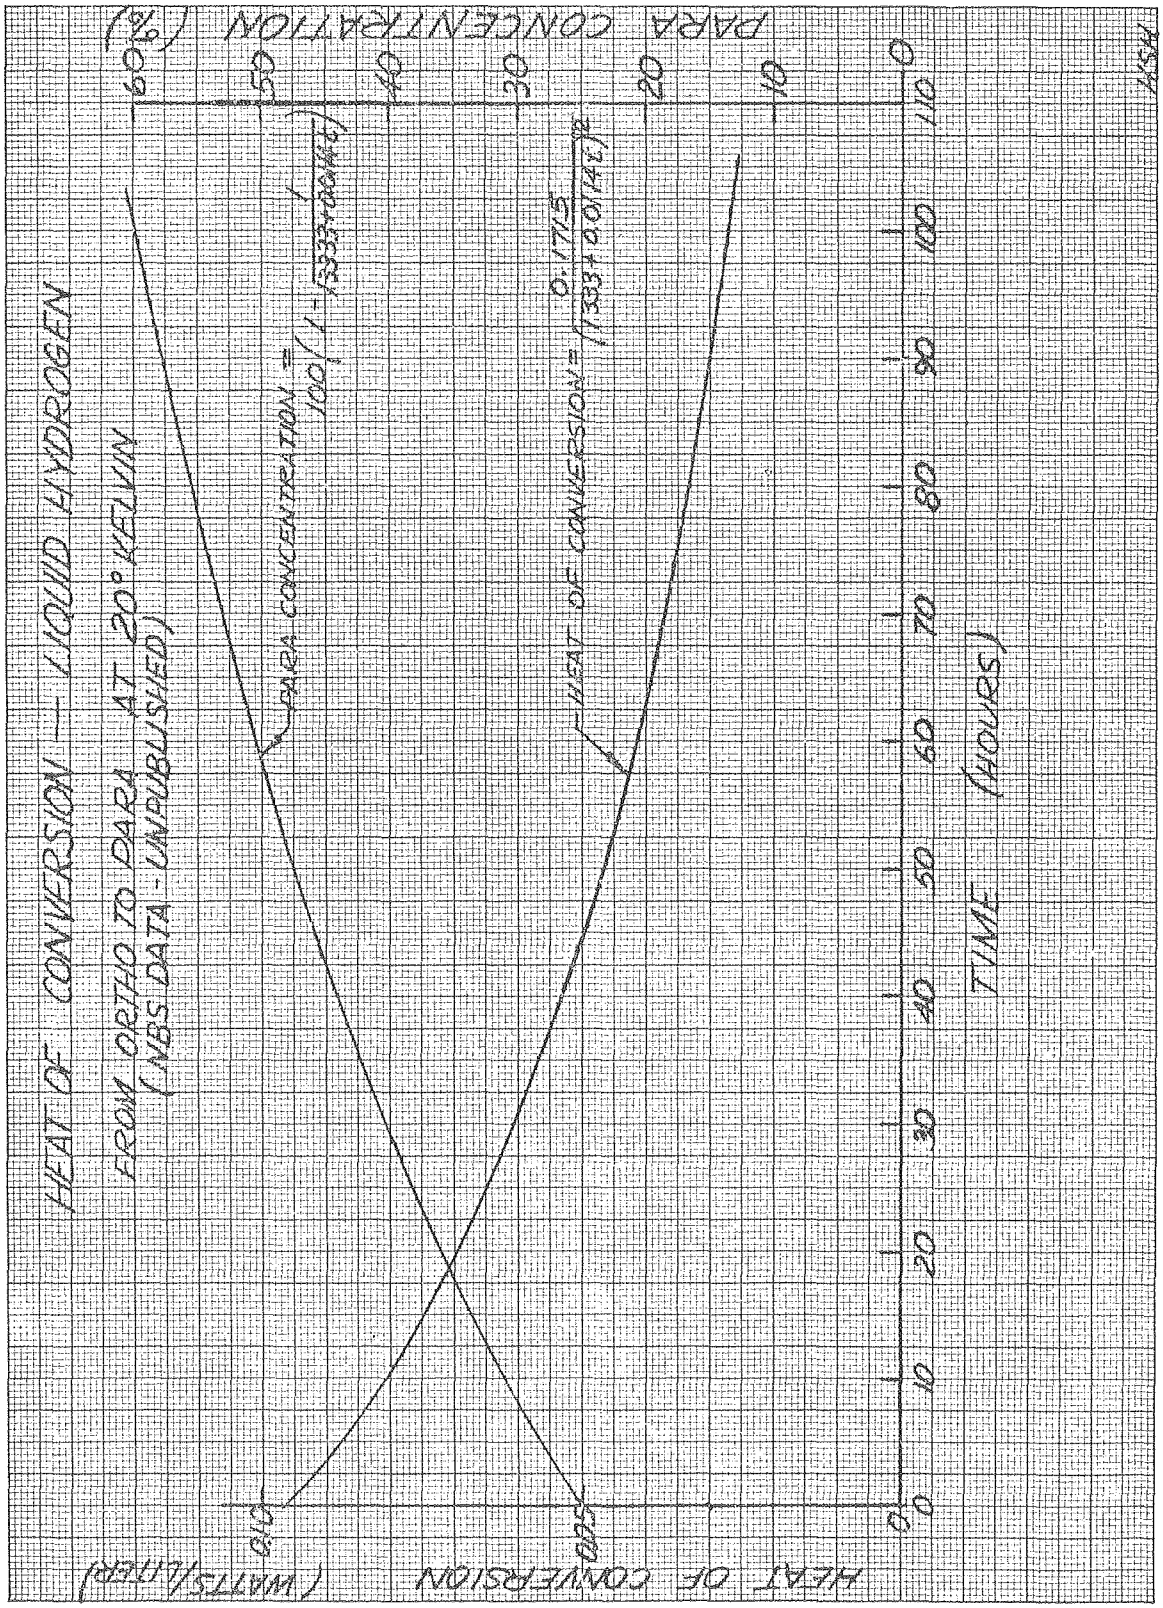
HEAT OF CONVERSION — LIQUID HYDROGEN
FROM ORTHO TO PARA AT 20° KELVIN
(NBS DATA - UNPUBLISHED)
PARA CONCENTRATION = 100 (1 - 1/(1333+0.0114t))
HEAT OF CONVERSION = 0.1715/(1333+0.0114t)²
PARA CONCENTRATION (%)
HEAT OF CONVERSION (WATTS/LITER)
TIME (HOURS)
0
10
20
30
40
50
60
70
80
90
100
110
0.10
0.05
0
10
20
30
40
50
60

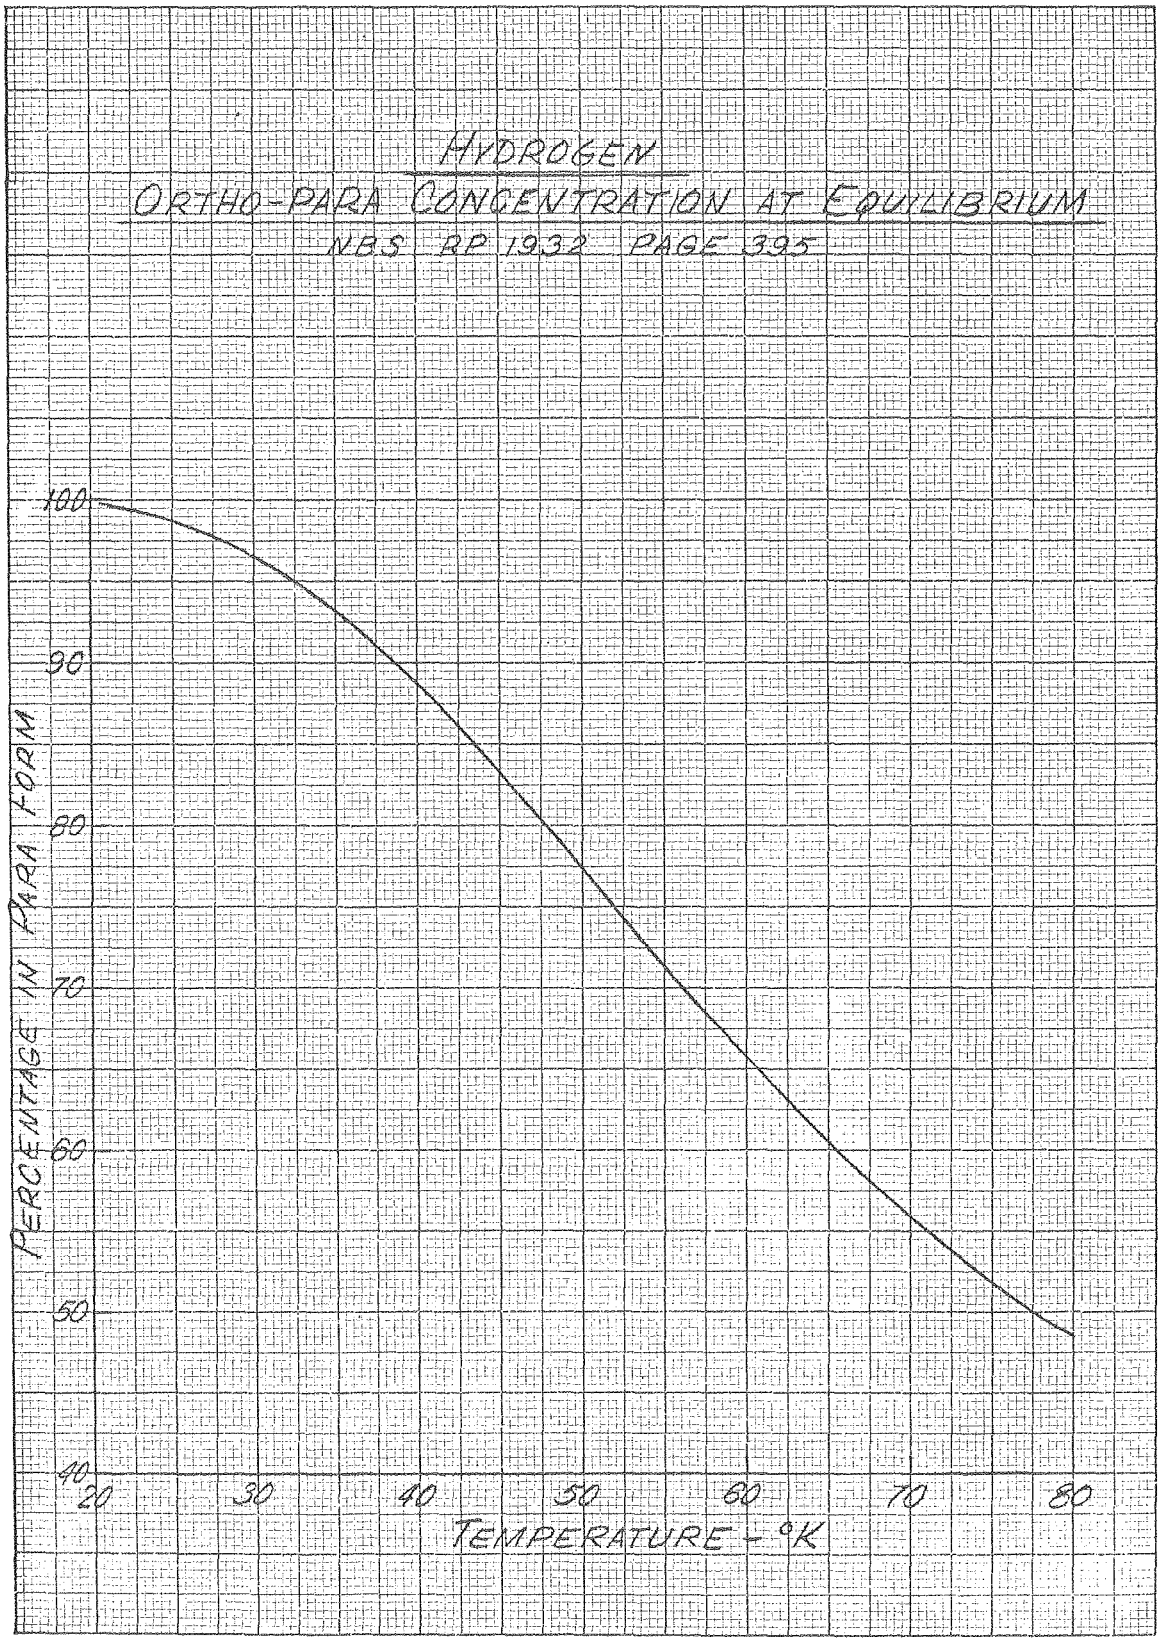
HYDROGEN
ORTHO-PARA CONCENTRATION AT EQUILIBRIUM
NBS RP 1932 PAGE 395
PERCENTAGE IN PARA FORM
100
90
80
70
60
50
40
20
30
40
50
60
70
80
TEMPERATURE - °K

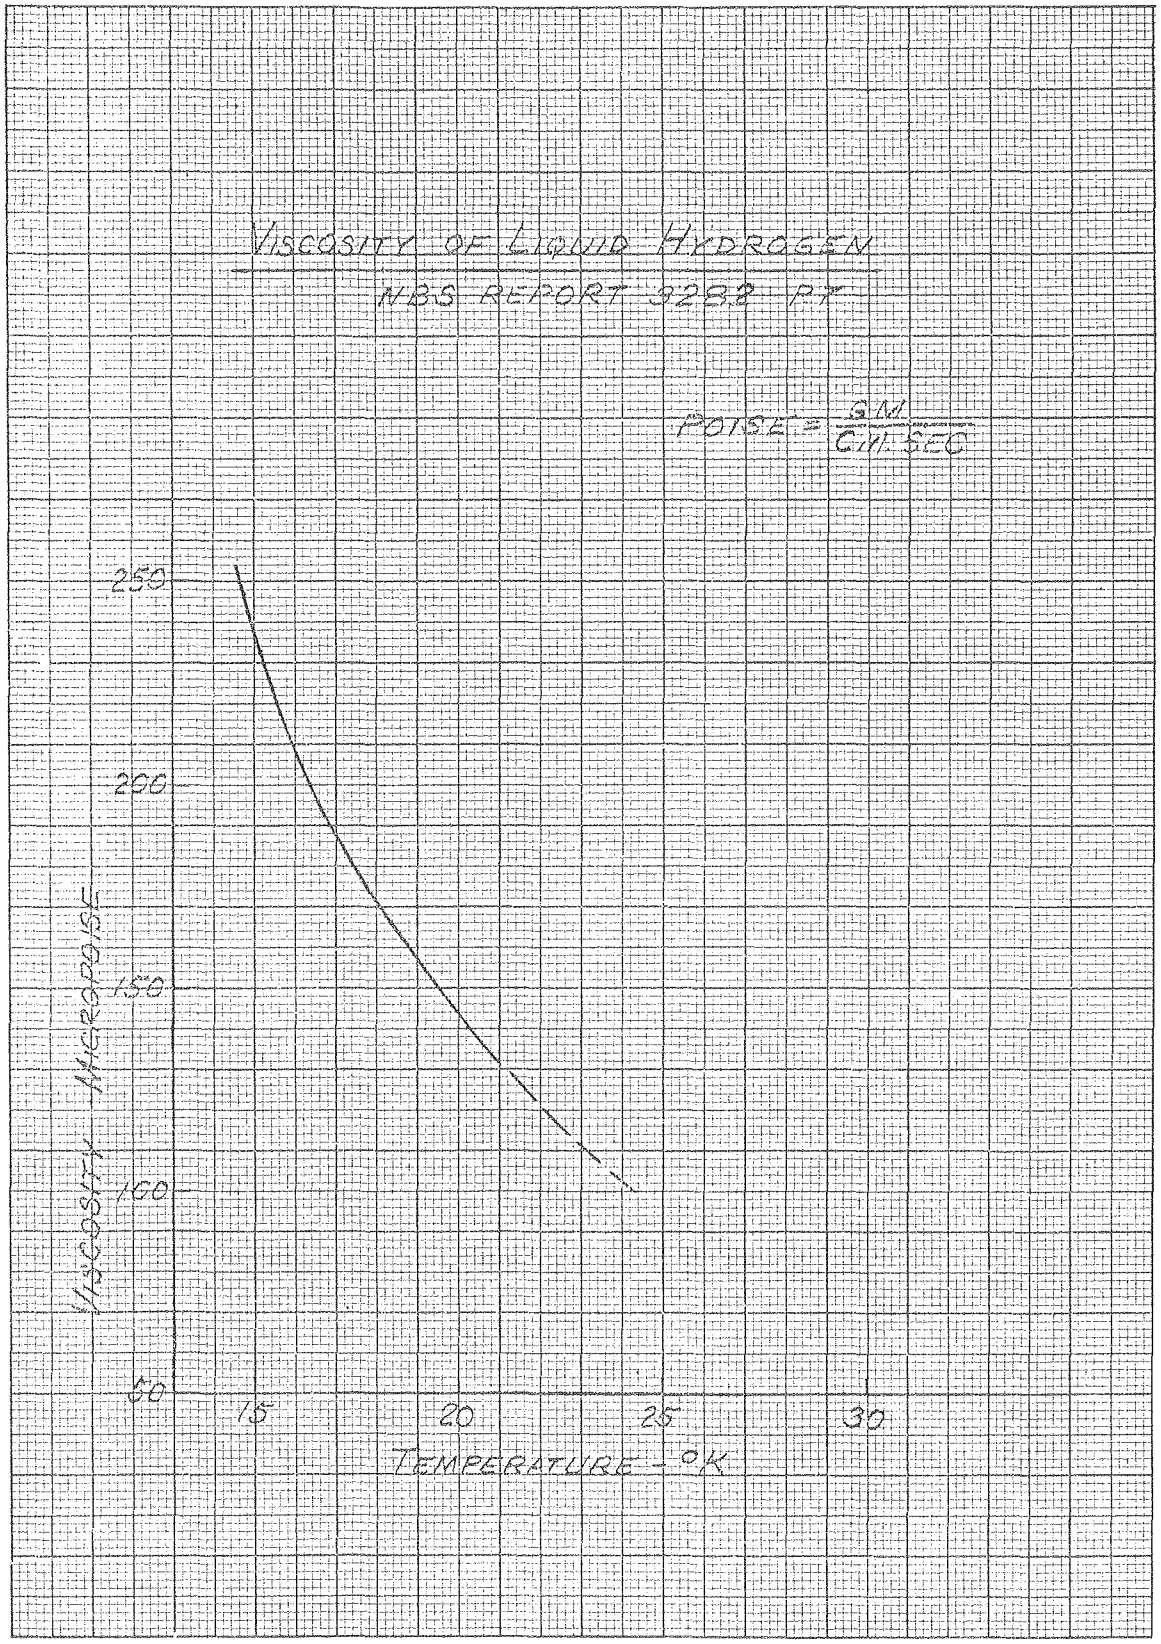
VISCOSITY OF LIQUID HYDROGEN
NBS REPORT 3288 PT
POISE = GM/CM. SEC
250
200
150
100
50
VISCOSITY - MICROPOISE
15
20
25
30
TEMPERATURE - °K

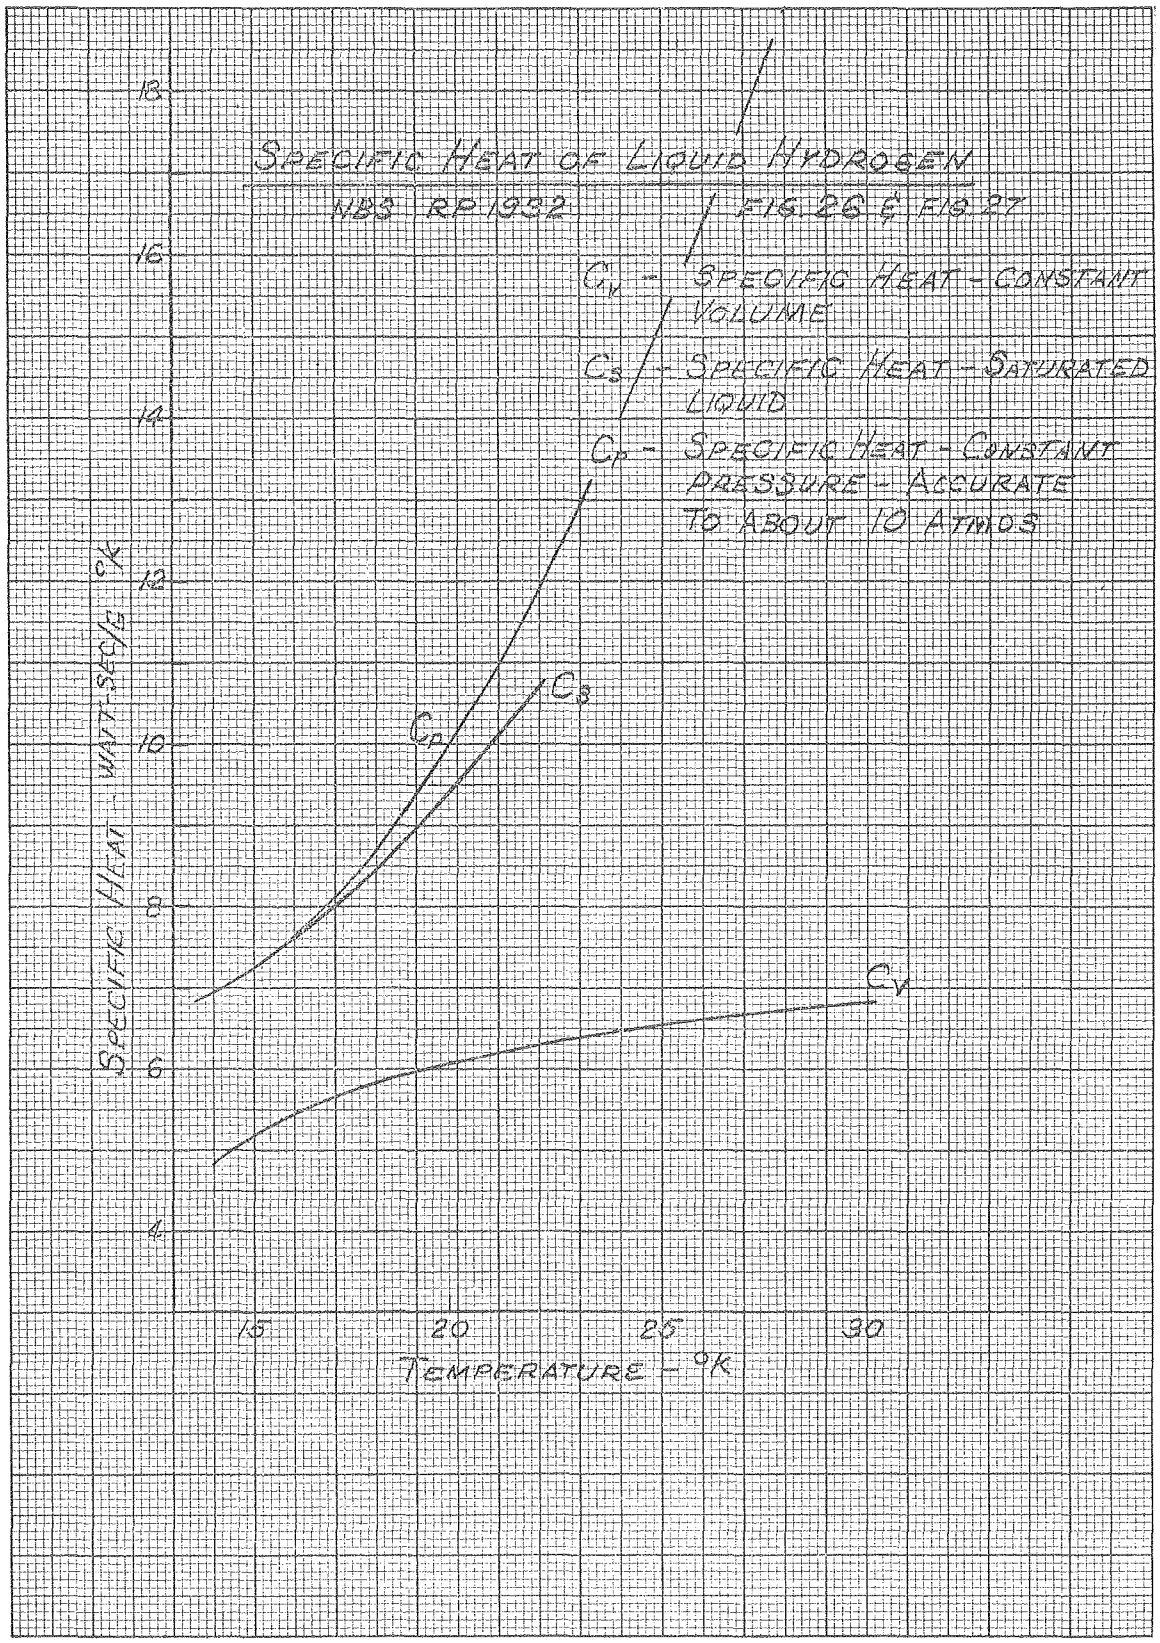
SPECIFIC HEAT OF LIQUID HYDROGEN
NBS RP 1932
FIG 26 & FIG 27
C_v - SPECIFIC HEAT - CONSTANT VOLUME
C_s - SPECIFIC HEAT - SATURATED LIQUID
C_p - SPECIFIC HEAT - CONSTANT PRESSURE - ACCURATE TO ABOUT 10 ATMOS
C_p
C_s
C_v
SPECIFIC HEAT - WATT-SEC/G °K
18
16
14
12
10
8
6
4
15
20
25
30
TEMPERATURE - °K

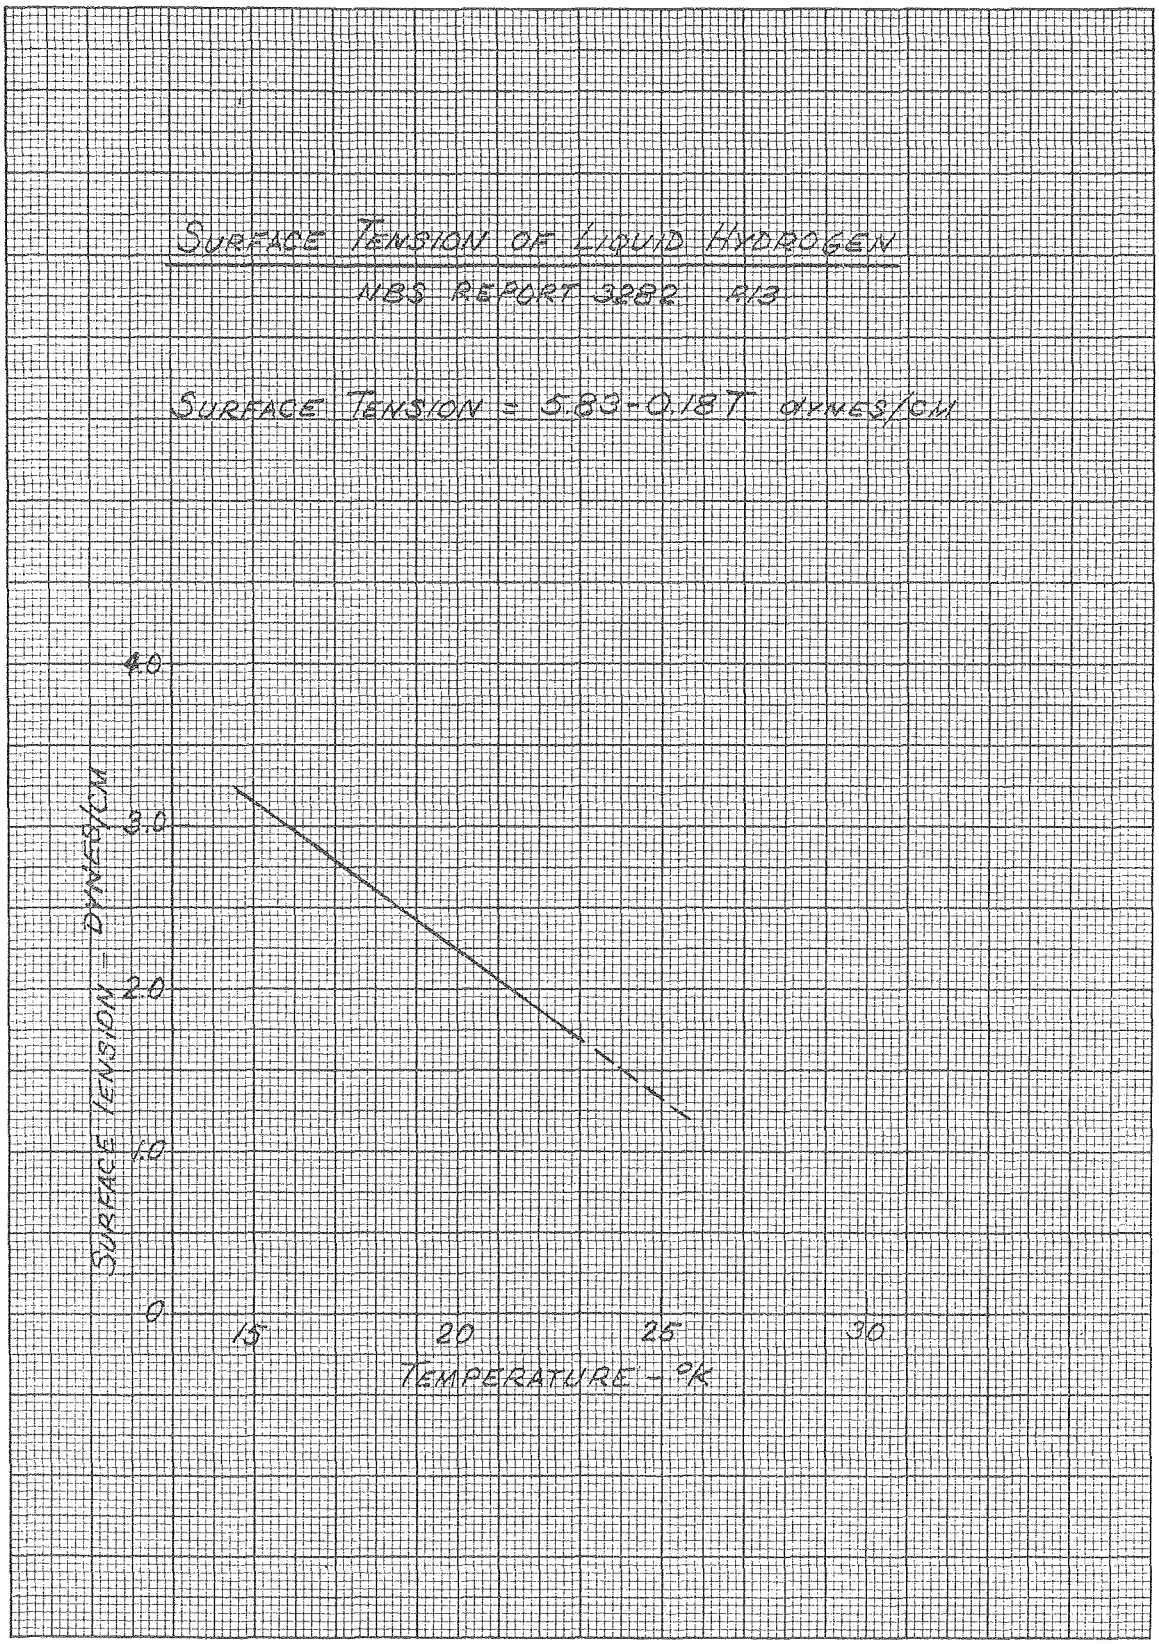
SURFACE TENSION OF LIQUID HYDROGEN
NBS REPORT 3282 P.13
SURFACE TENSION = 5.83 - 0.18T DYNES/CM
4.0
3.0
2.0
1.0
0
SURFACE TENSION - DYNES/CM
15
20
25
30
TEMPERATURE - °K

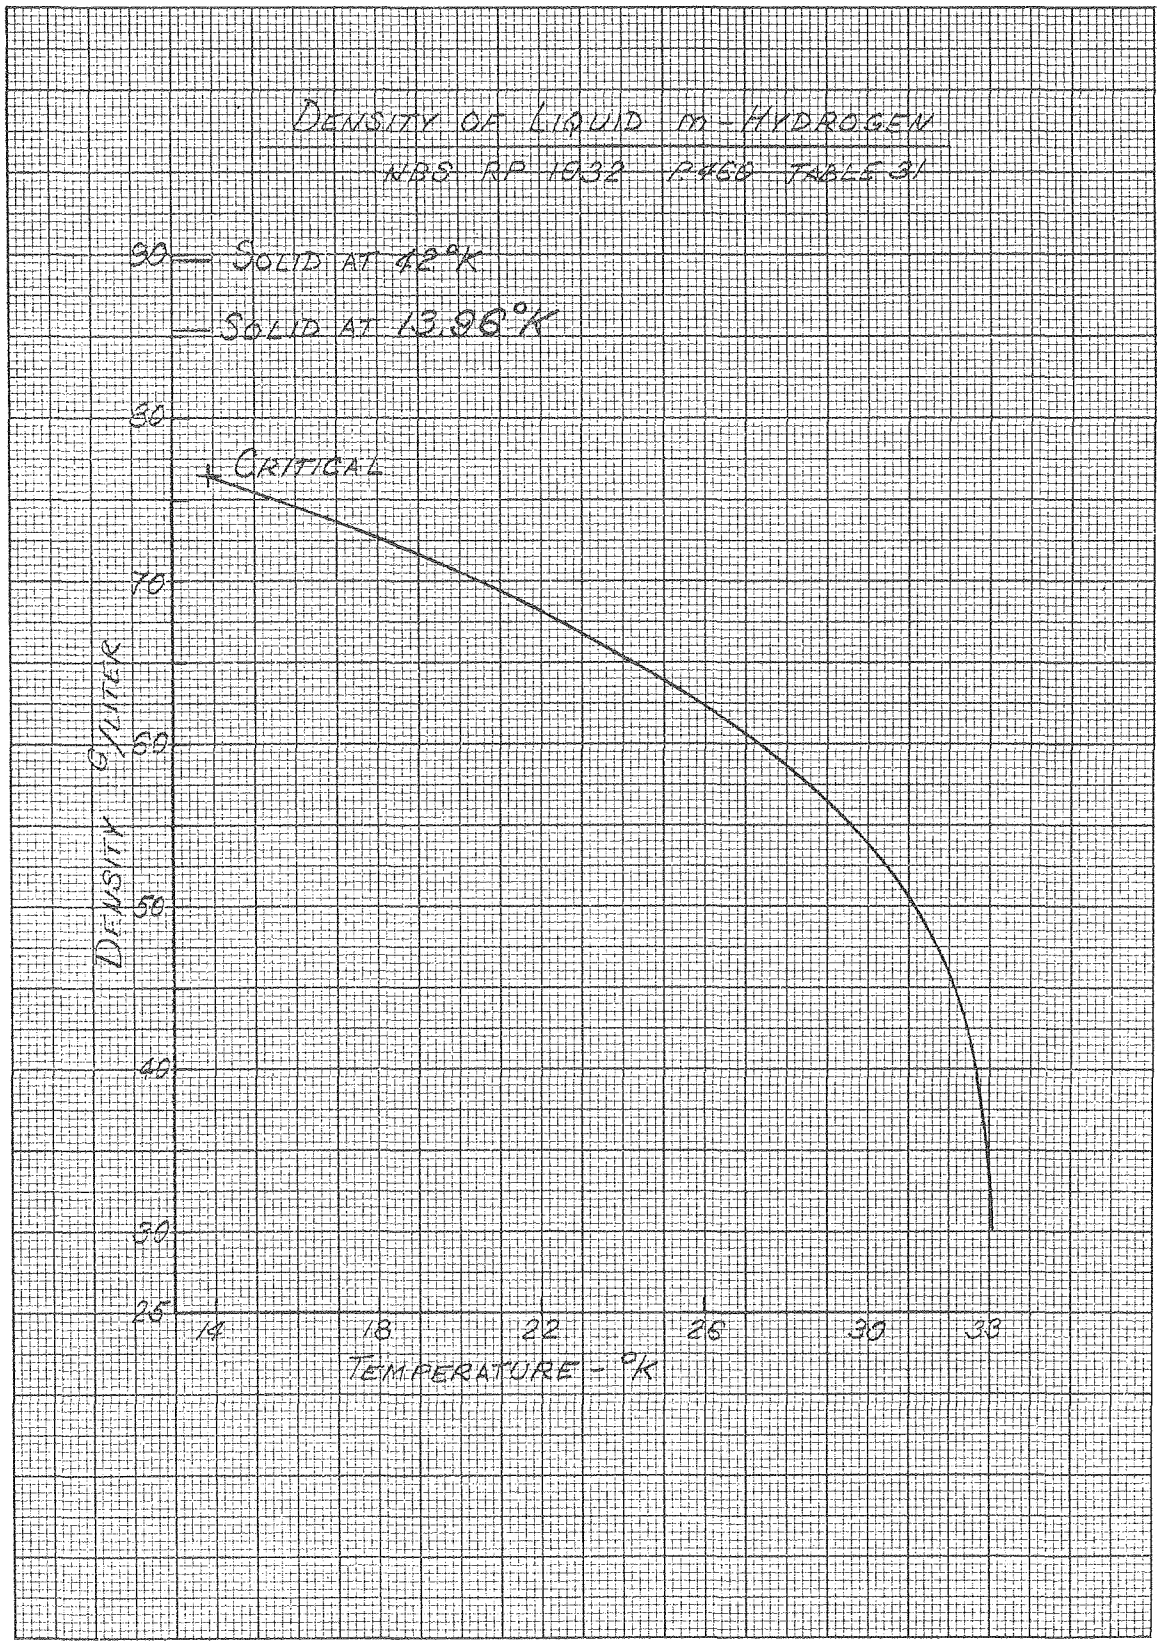
DENSITY OF LIQUID m-HYDROGEN
NBS RP 1032 P460 TABLE 31
SOLID AT 42°K
SOLID AT 13.96°K
CRITICAL
DENSITY G/LITER
90
80
70
60
50
40
30
25
14
18
22
26
30
33
TEMPERATURE - °K

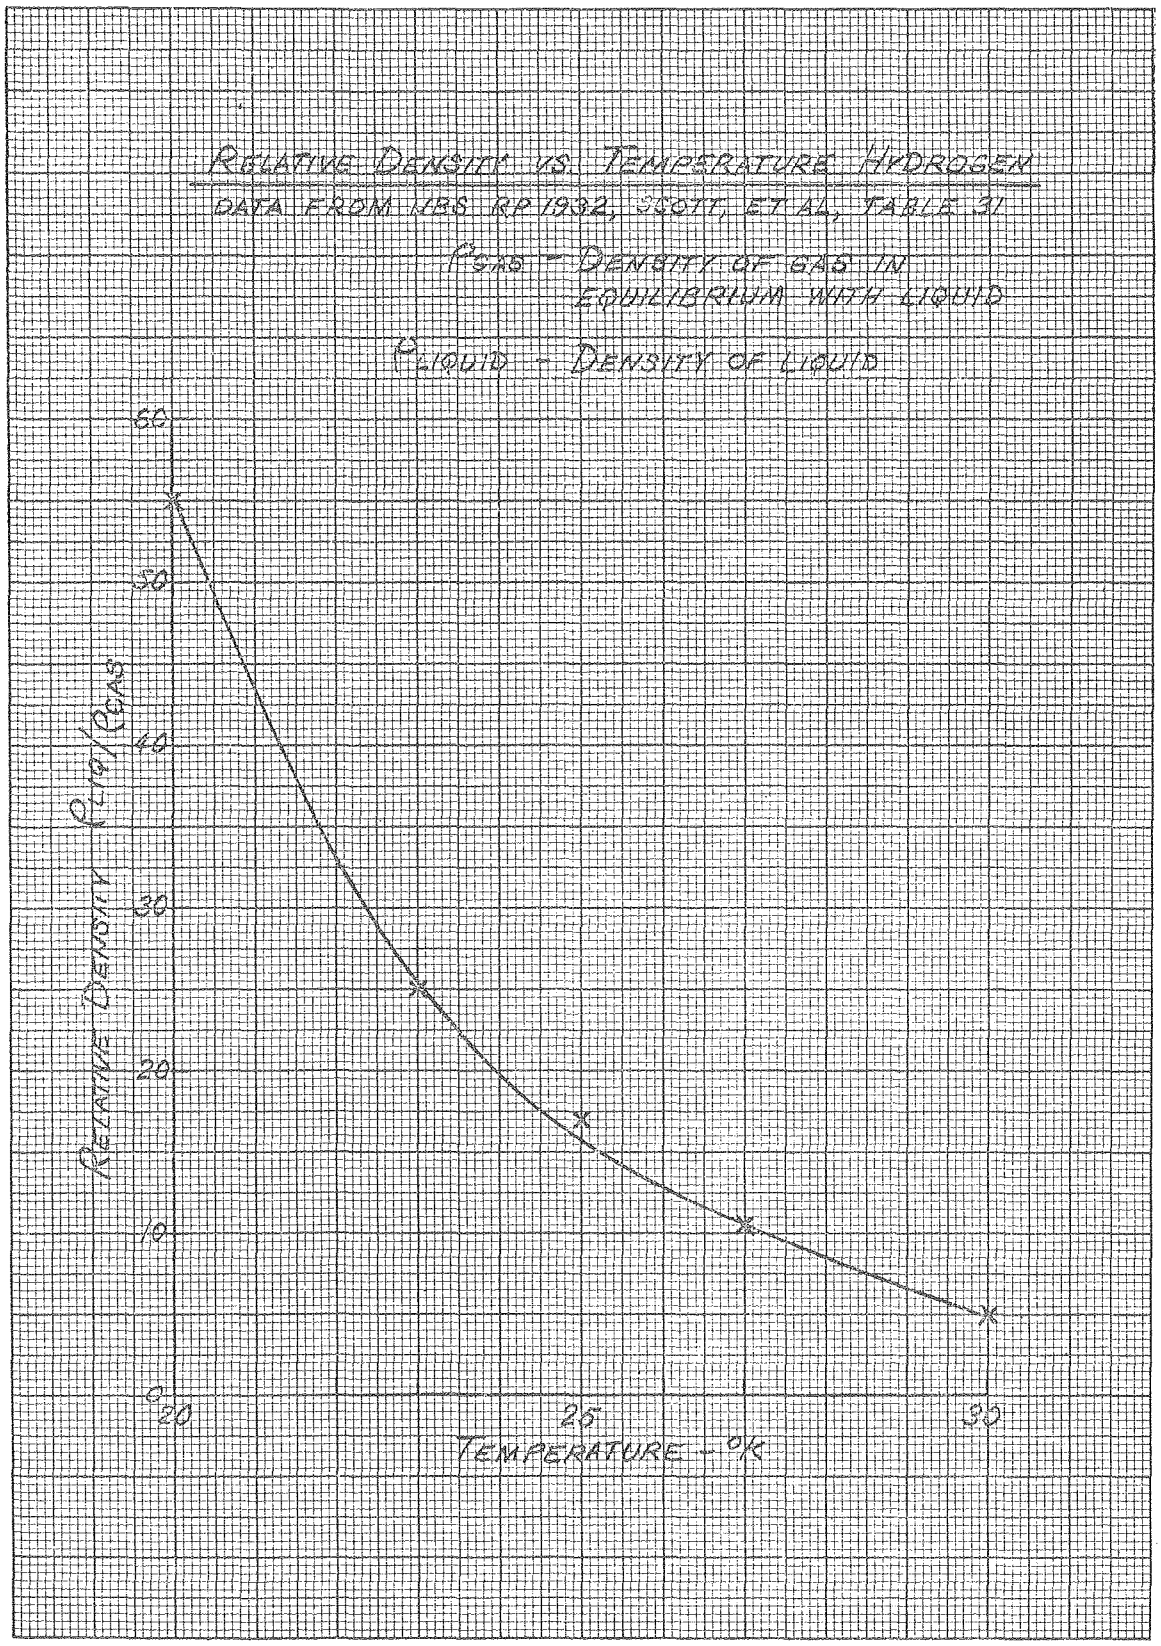
RELATIVE DENSITY VS. TEMPERATURE HYDROGEN
DATA FROM NBS RP 1932, SCOTT, ET AL., TABLE 31
ρGAS - DENSITY OF GAS IN EQUILIBRIUM WITH LIQUID
ρLIQUID - DENSITY OF LIQUID
RELATIVE DENSITY (ρLIQ/ρGAS)
50
40
30
20
10
0
20
25
30
TEMPERATURE - °K

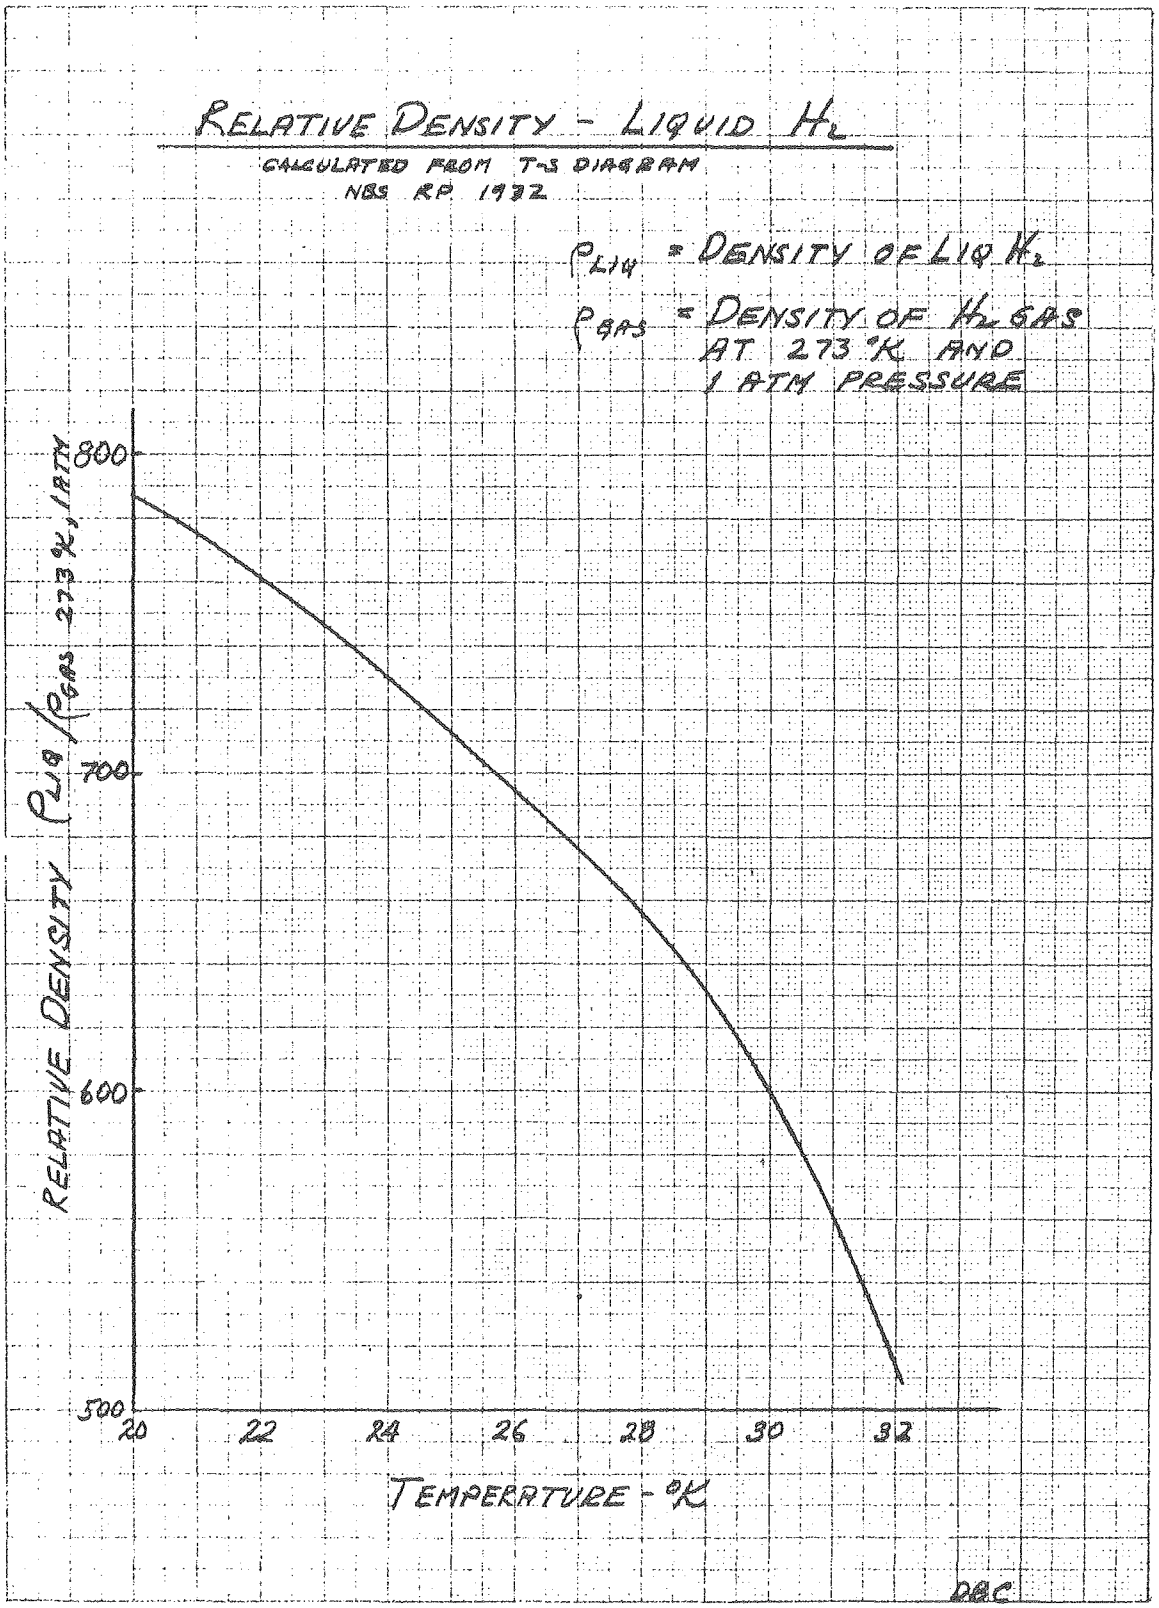
RELATIVE DENSITY - LIQUID H_2
CALCULATED FROM T-S DIAGRAM
NBS RP 1932
ρ_{LIQ} = DENSITY OF LIQ H_2
ρ_{GAS} = DENSITY OF H_2 GAS AT 273 °K AND 1 ATM PRESSURE
RELATIVE DENSITY ρ_{LIQ}/ρ_{GAS} 273 °K, 1 ATM
800
700
600
500
20
22
24
26
28
30
32
TEMPERATURE - °K
DBC

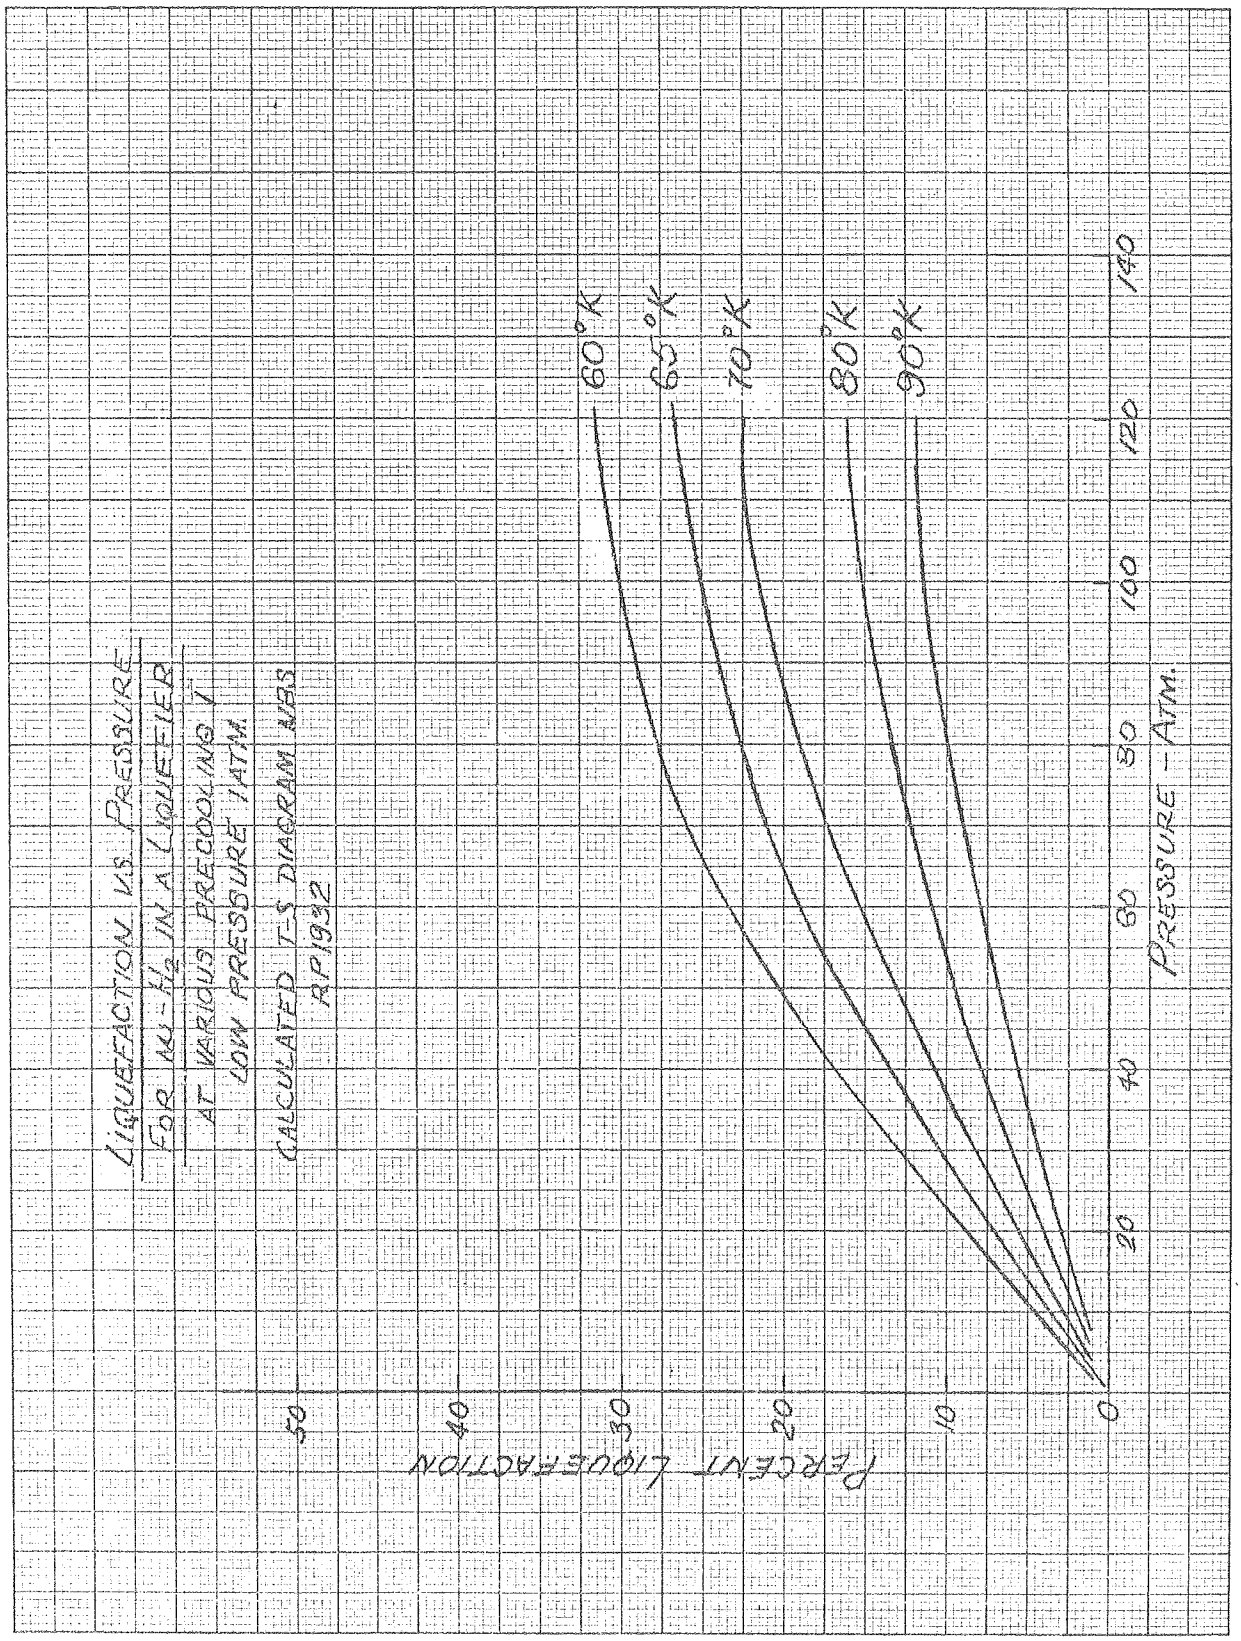
LIQUEFACTION VS. PRESSURE
FOR N_2-H_2 IN A LIQUEFIER
AT VARIOUS PRECOOLING T
LOW PRESSURE 1 ATM.
CALCULATED T-S DIAGRAM NBS
RP1932
60°K
65°K
70°K
80°K
90°K
PERCENT LIQUEFACTION
0
10
20
30
40
50
PRESSURE - ATM.
20
40
60
80
100
120
140

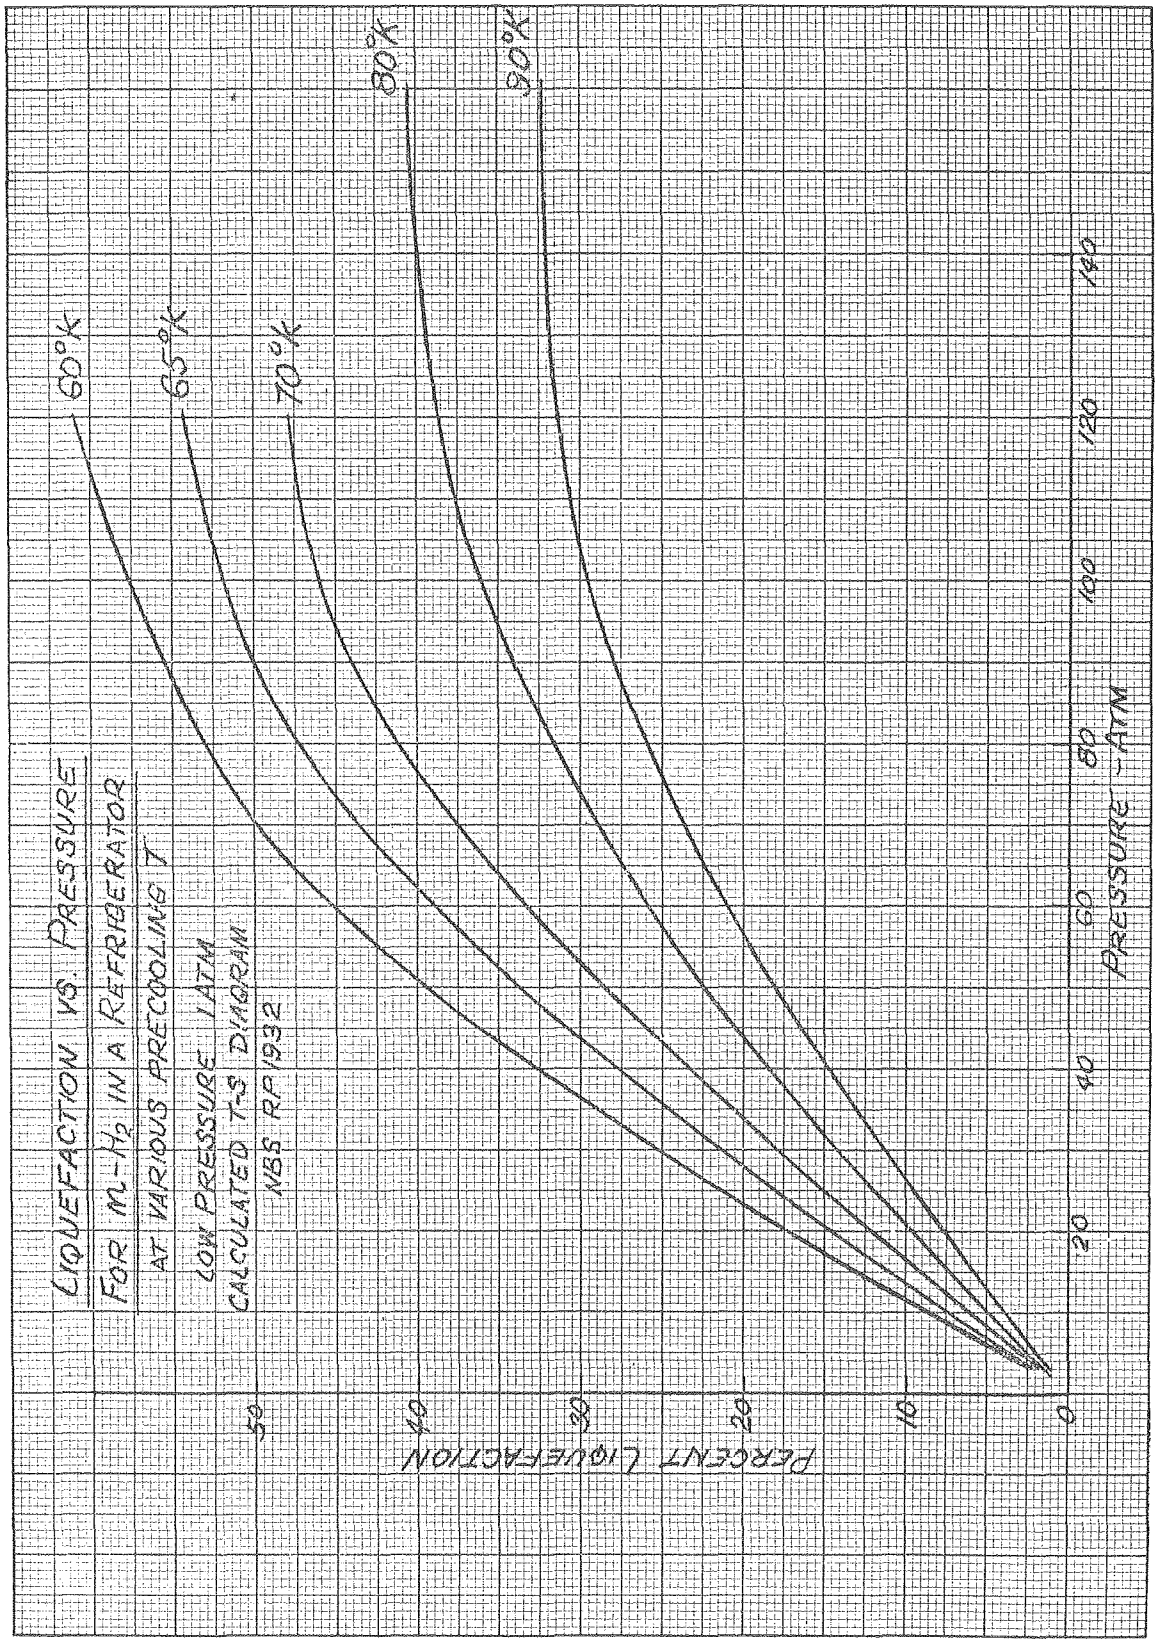
LIQUEFACTION VS. PRESSURE
FOR M-H2 IN A REFRIGERATOR
AT VARIOUS PRECOOLING T
LOW PRESSURE 1 ATM
CALCULATED T-S DIAGRAM
NBS RP 1932
60°K
65°K
70°K
80°K
90°K
PERCENT LIQUEFACTION
50
40
30
20
10
0
PRESSURE - ATM
20
40
60
80
100
120
140

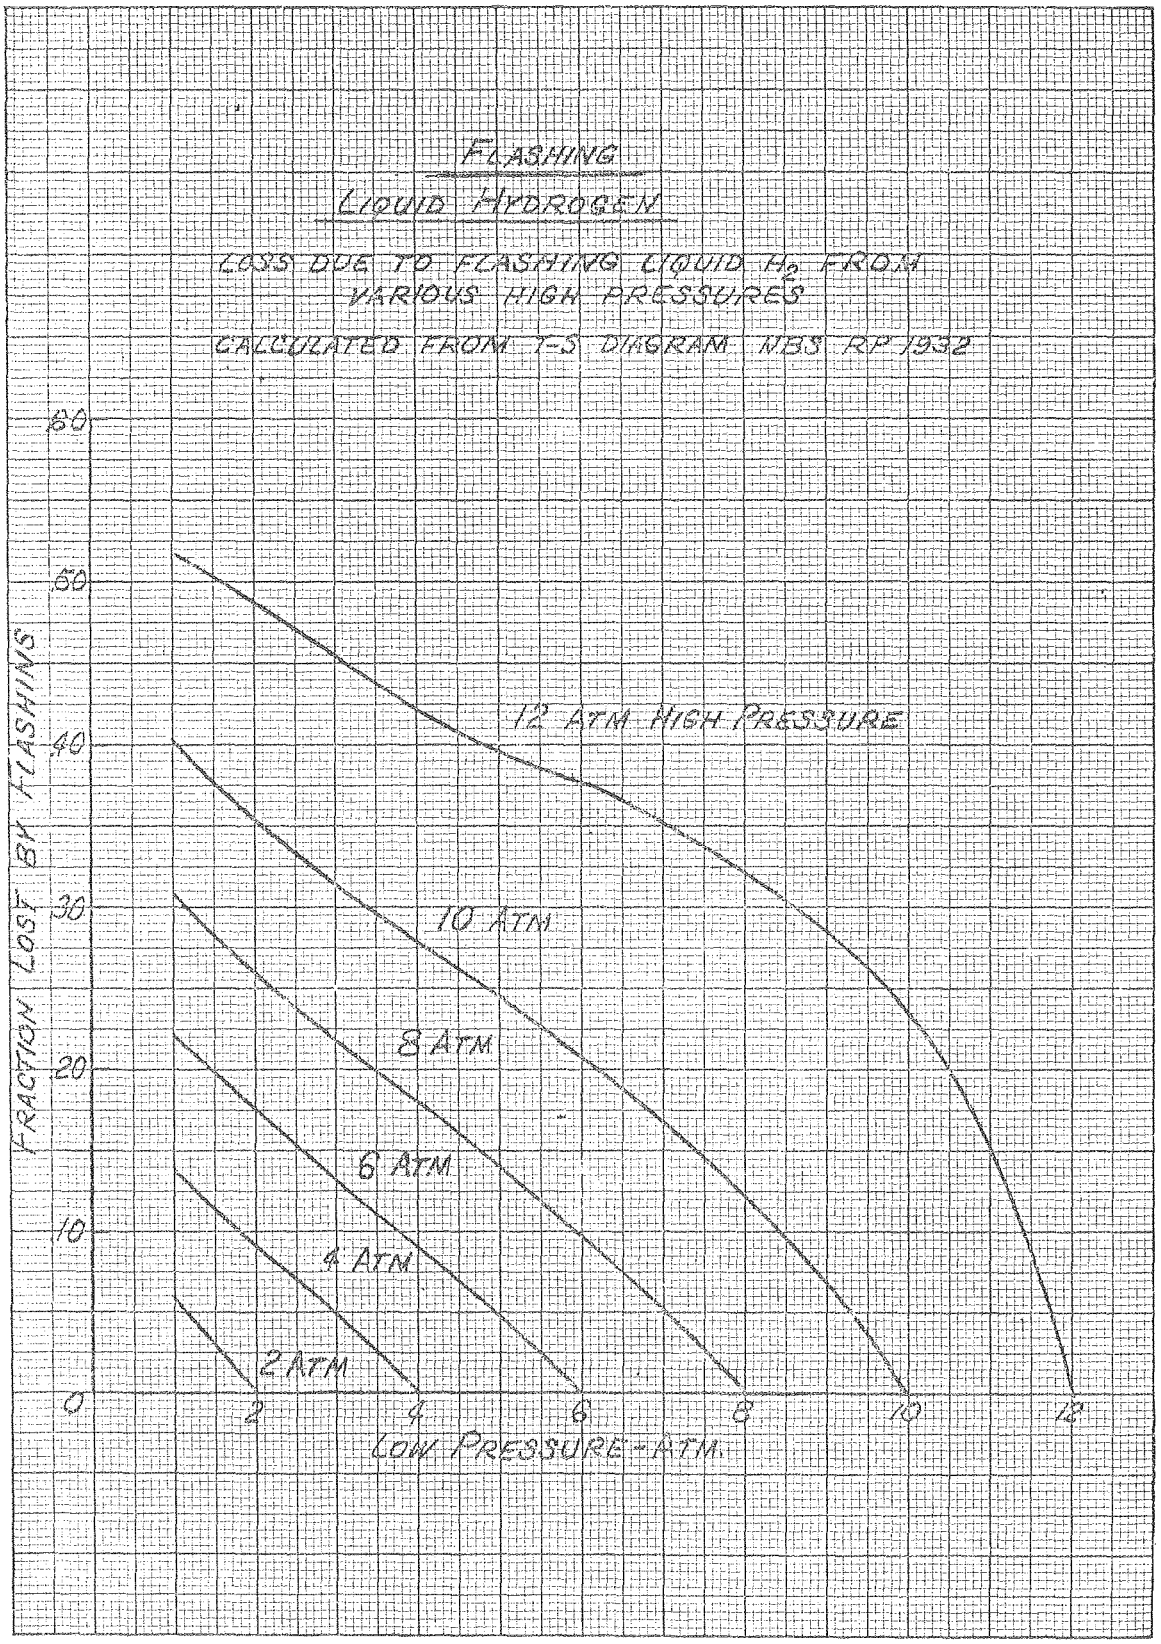
FLASHING
LIQUID HYDROGEN
LOSS DUE TO FLASHING LIQUID H_2 FROM VARIOUS HIGH PRESSURES
CALCULATED FROM T-S DIAGRAM NBS RP 1932
FRACTION LOST BY FLASHING
0
10
20
30
40
50
60
12 ATM HIGH PRESSURE
10 ATM
8 ATM
6 ATM
4 ATM
2 ATM
2
4
6
8
10
12
LOW PRESSURE - ATM

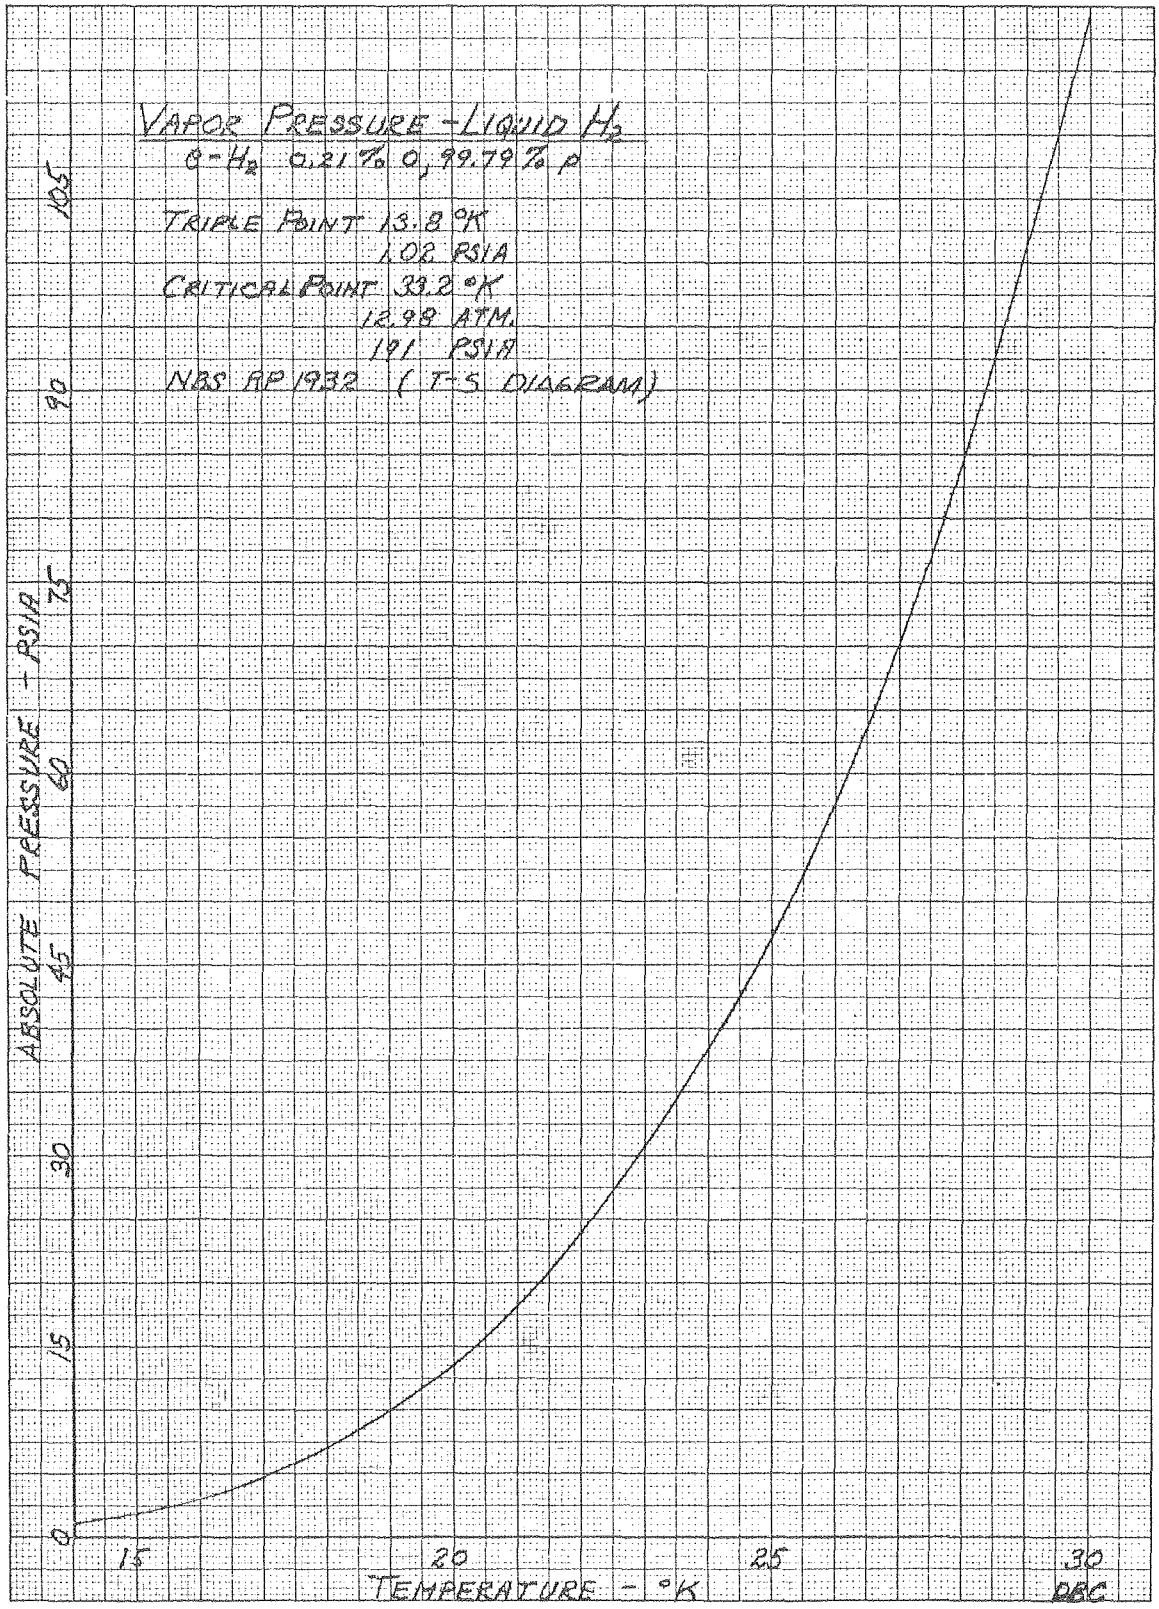
VAPOR PRESSURE - LIQUID H_2
$C-H_2$ 0.21% O, 99.79% P
TRIPLE POINT 13.8 °K
1.02 PSIA
CRITICAL POINT 33.2 °K
12.98 ATM.
191 PSIA
NBS RP 1932 (T-S DIAGRAM)
ABSOLUTE PRESSURE - PSIA
0
15
30
45
60
75
90
105
15
20
25
30
TEMPERATURE - °K
RBC

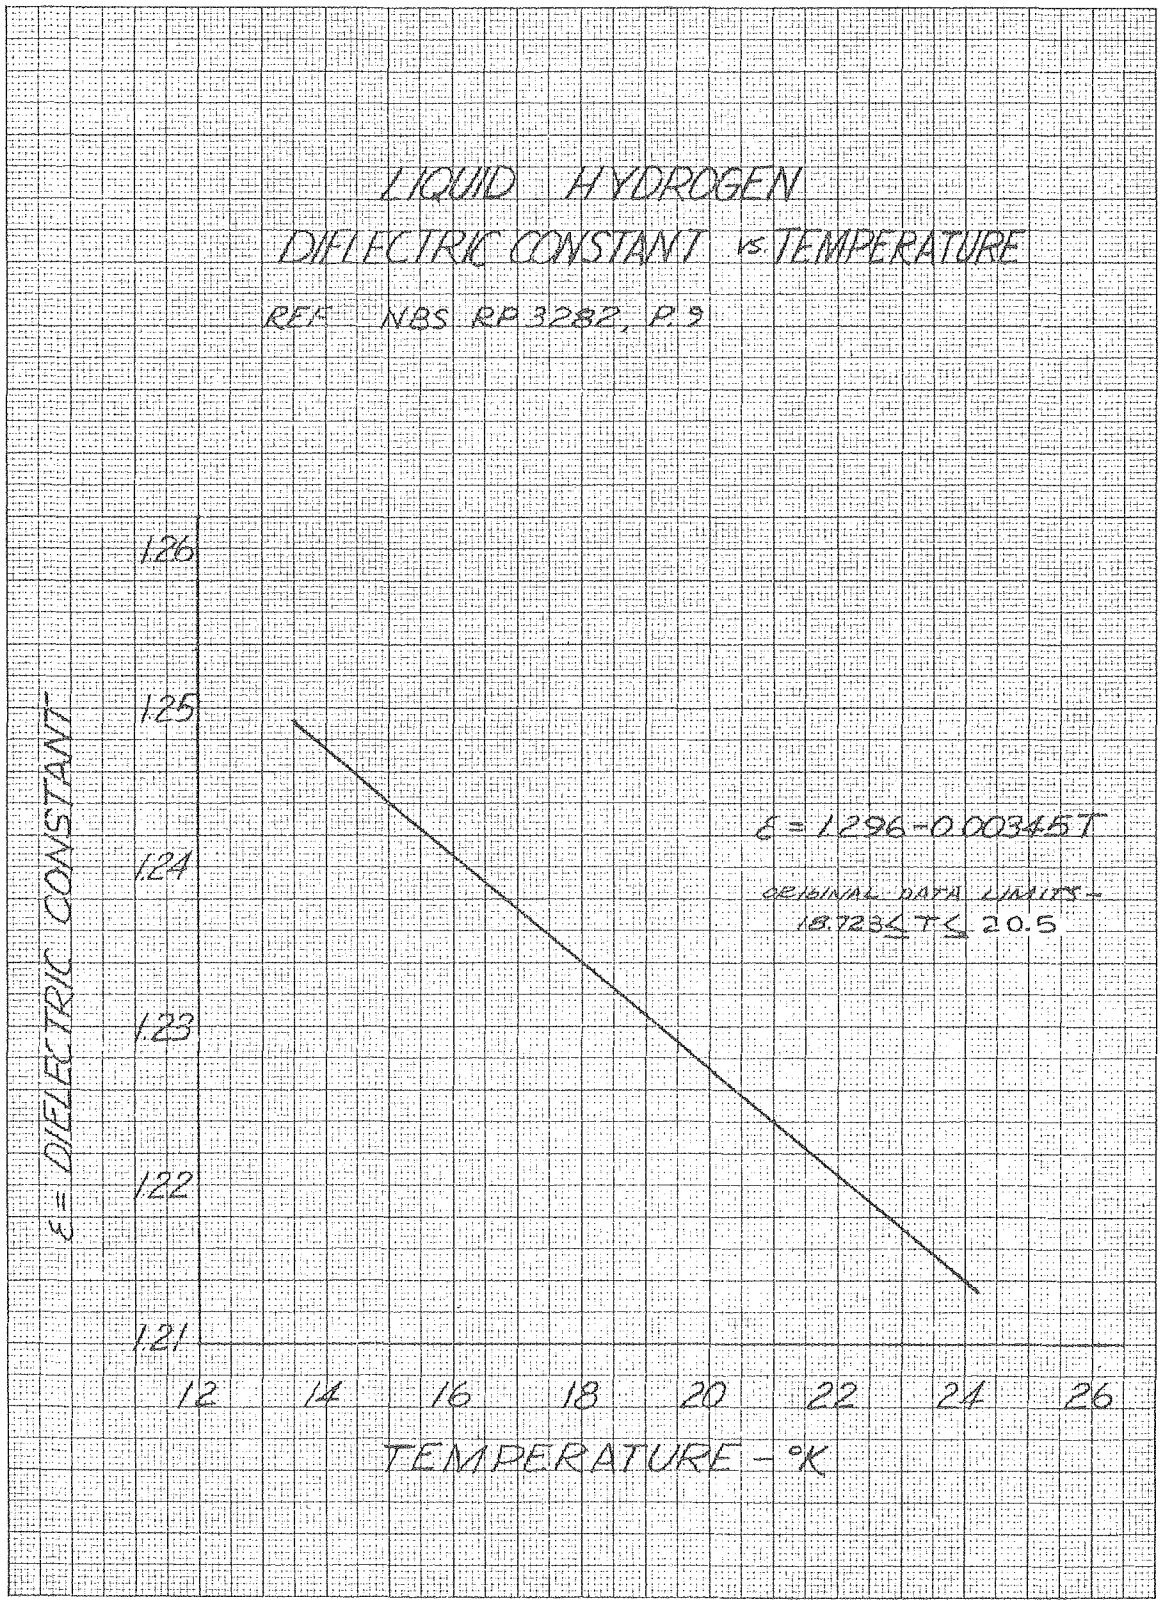
LIQUID HYDROGEN
DIELECTRIC CONSTANT vs. TEMPERATURE
REF. NBS RP 3282, P. 9
ε = 1.296 - 0.00345T
ORIGINAL DATA LIMITS -
18.723 ≤ T ≤ 20.5
ε = DIELECTRIC CONSTANT
1.26
1.25
1.24
1.23
1.22
1.21
12
14
16
18
20
22
24
26
TEMPERATURE - °K

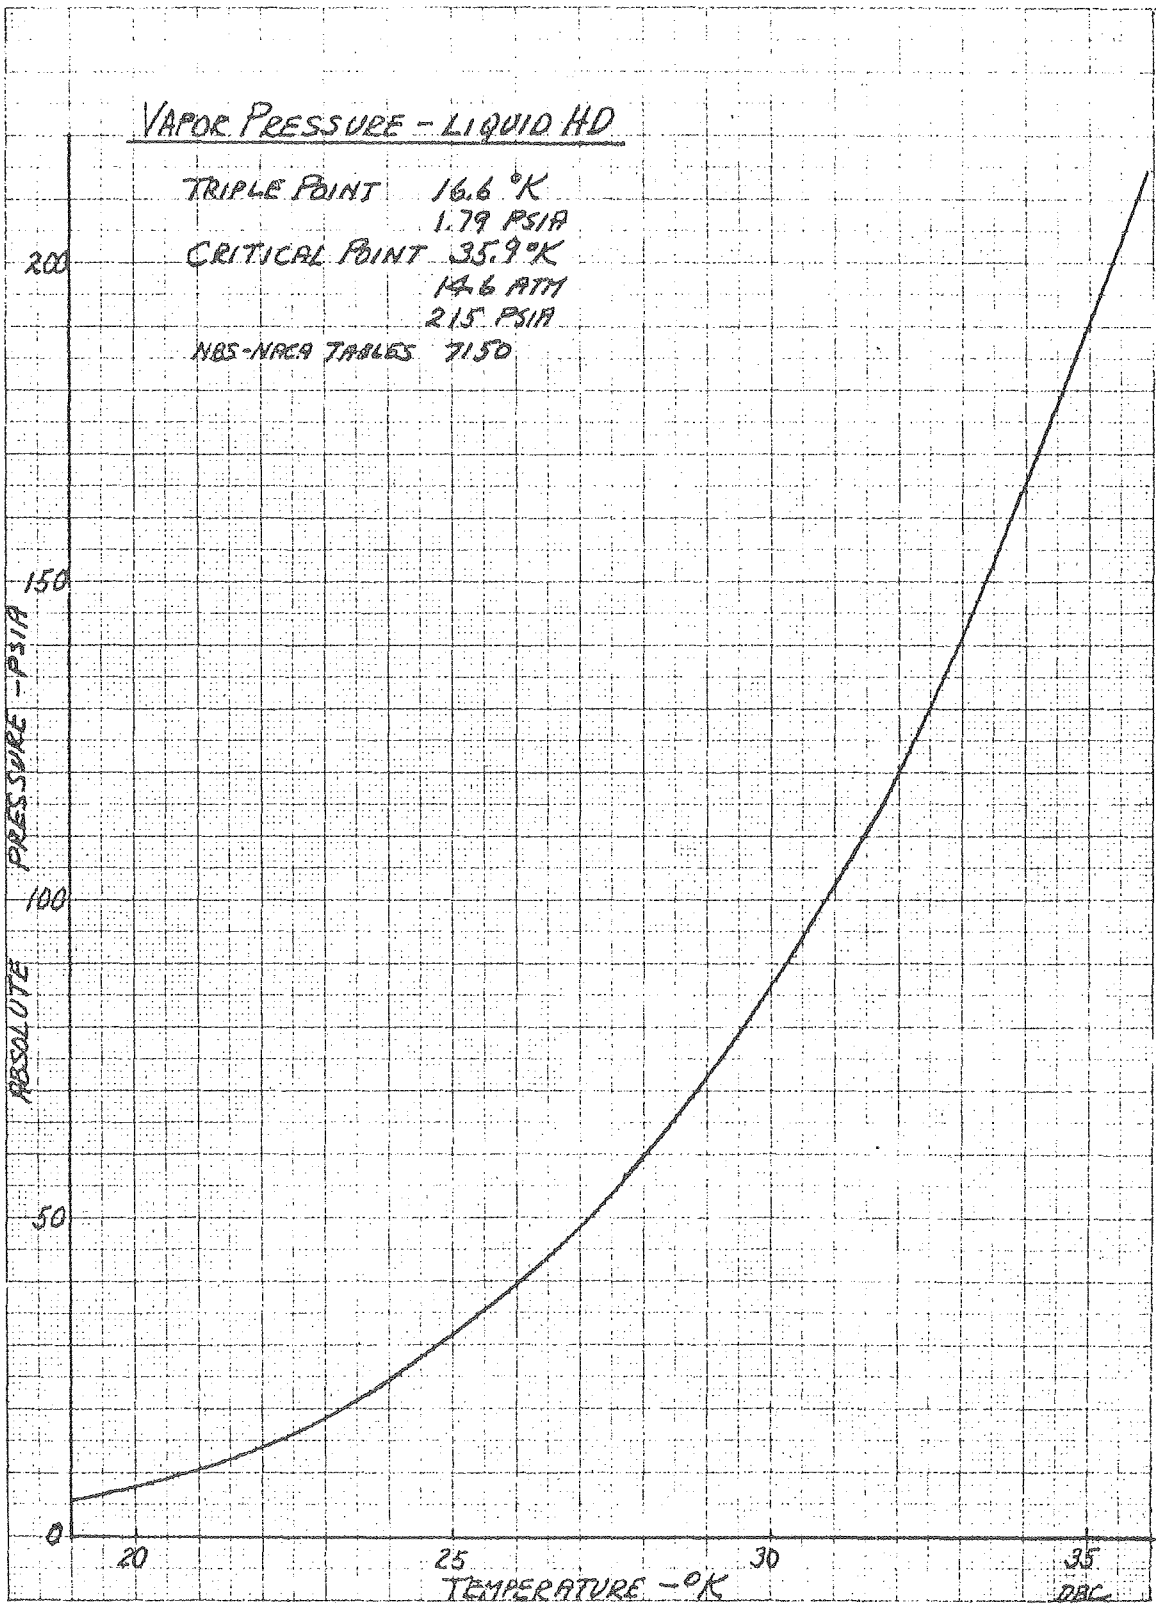
VAPOR PRESSURE - LIQUID HD
TRIPLE POINT 16.6 °K
1.79 PSIA
CRITICAL POINT 35.9 °K
14.6 ATM
215 PSIA
NBS-NACA TABLES 7150
ABSOLUTE PRESSURE - PSIA
200
150
100
50
0
20
25
30
35
TEMPERATURE - °K
DBC

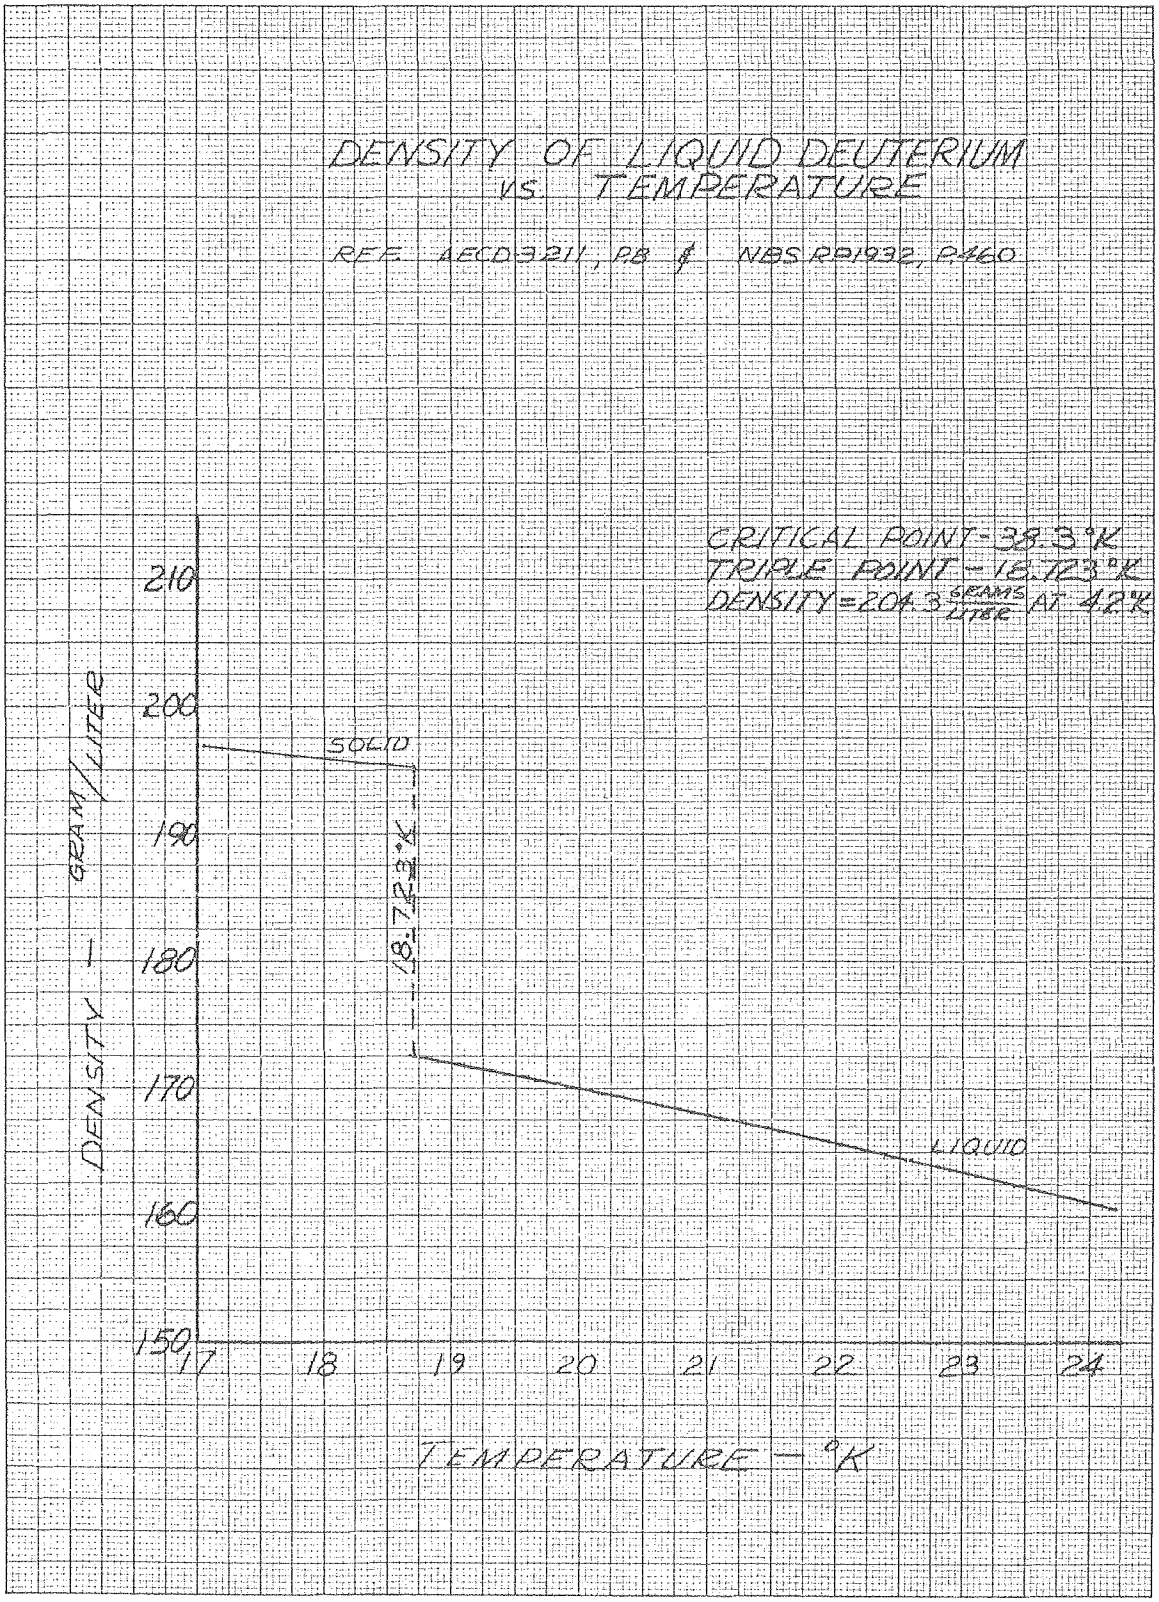
DENSITY OF LIQUID DEUTERIUM
VS. TEMPERATURE
REF. AECD 3211, P8 & NBS RP1932, P460
CRITICAL POINT - 38.3°K
TRIPLE POINT - 18.723°K
DENSITY = 204.3 GRAMS/LITRE AT 4.2°K
SOLID
LIQUID
18.723°K
DENSITY - GRAM/LITER
210
200
190
180
170
160
150
17
18
19
20
21
22
23
24
TEMPERATURE - °K

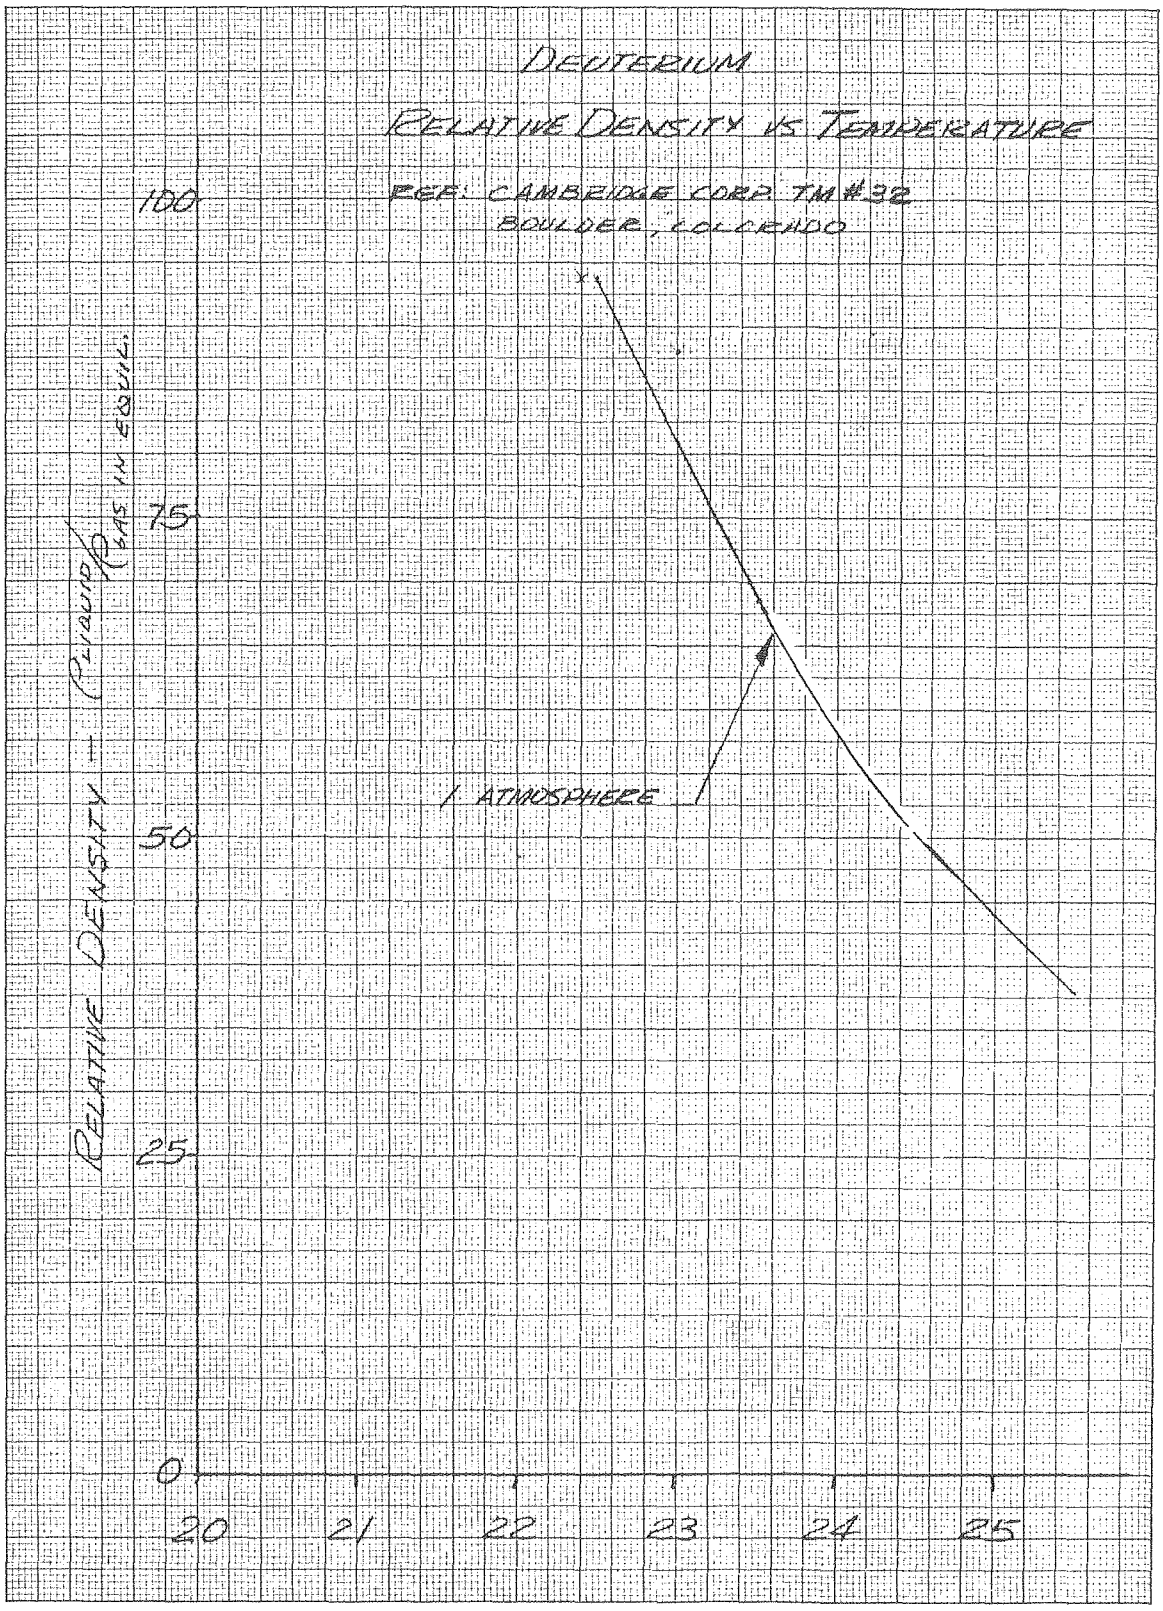
DEUTERIUM
RELATIVE DENSITY VS TEMPERATURE
REF: CAMBRIDGE CORP. TM #32
BOULDER, COLORADO
RELATIVE DENSITY = ρ LIQUID / ρ GAS IN EQUIL.
100
75
50
25
0
1 ATMOSPHERE
20
21
22
23
24
25

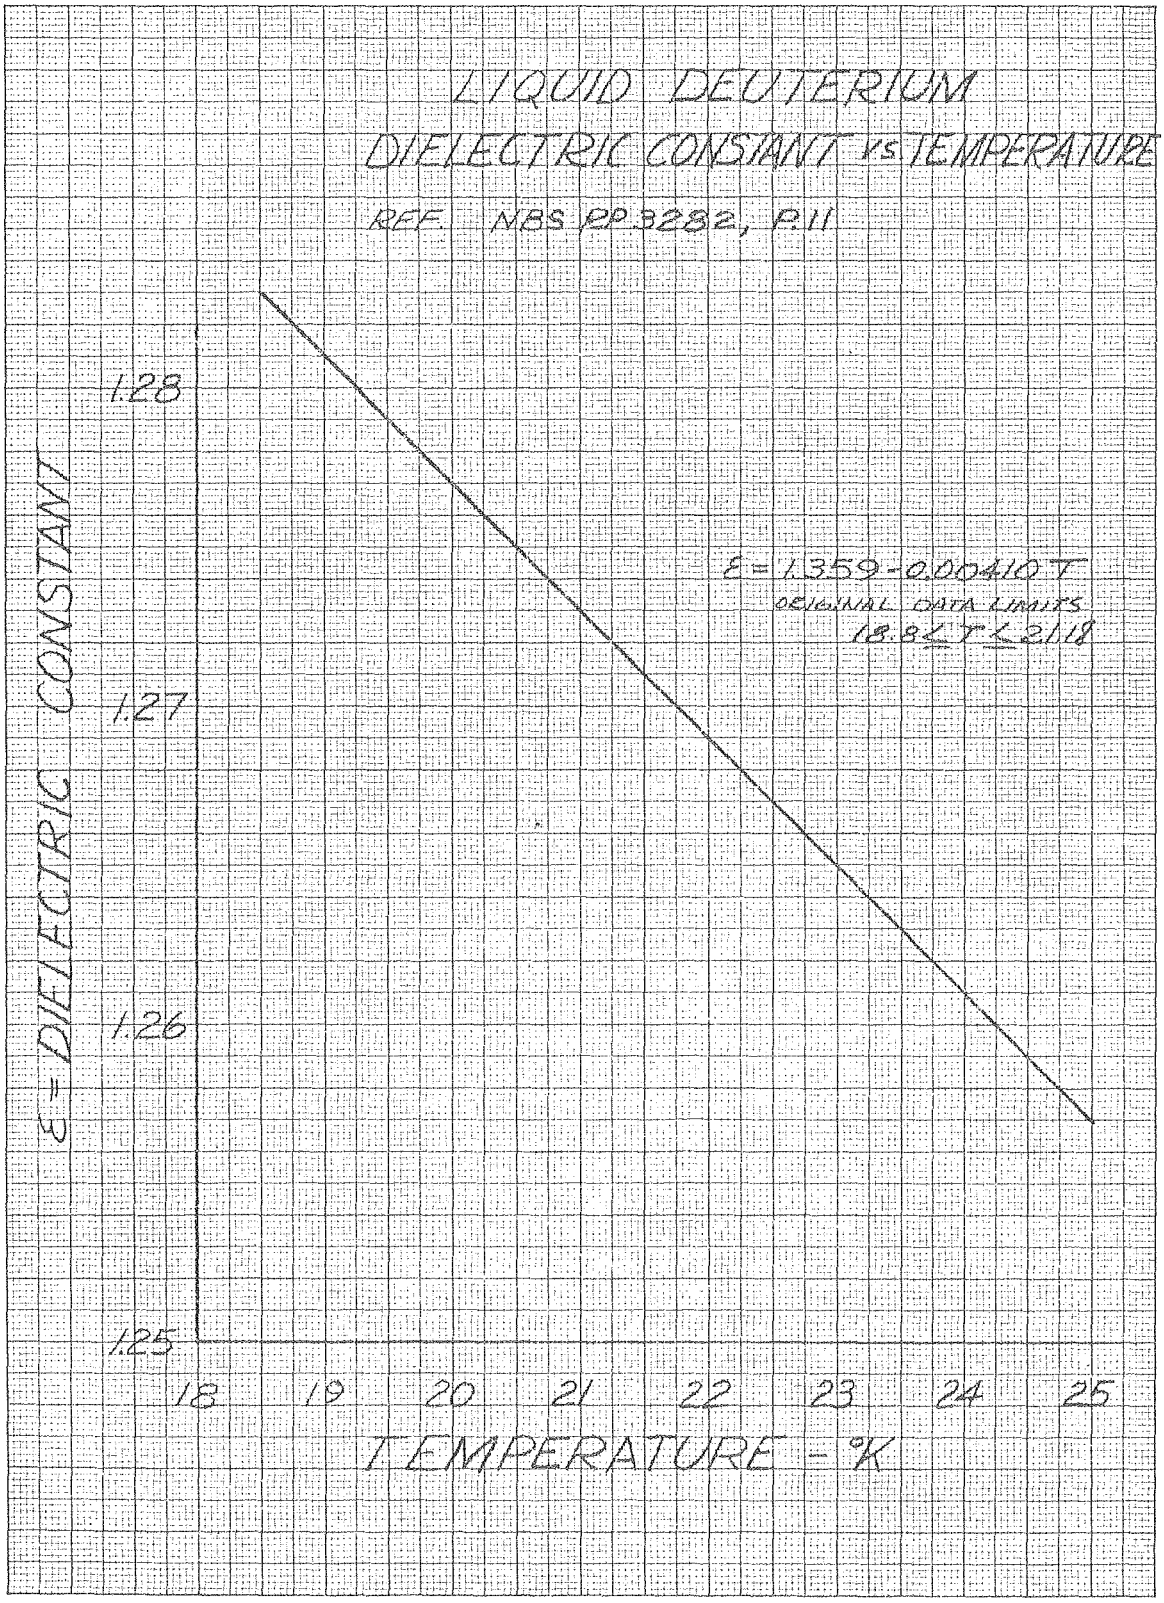
LIQUID DEUTERIUM
DIELECTRIC CONSTANT VS TEMPERATURE
REF. NBS RP 3282, P.11
ε = 1.359 - 0.00410 T
ORIGINAL DATA LIMITS
18.8 ≤ T ≤ 21.18
1.28
1.27
1.26
1.25
ε = DIELECTRIC CONSTANT
18
19
20
21
22
23
24
25
TEMPERATURE - °K

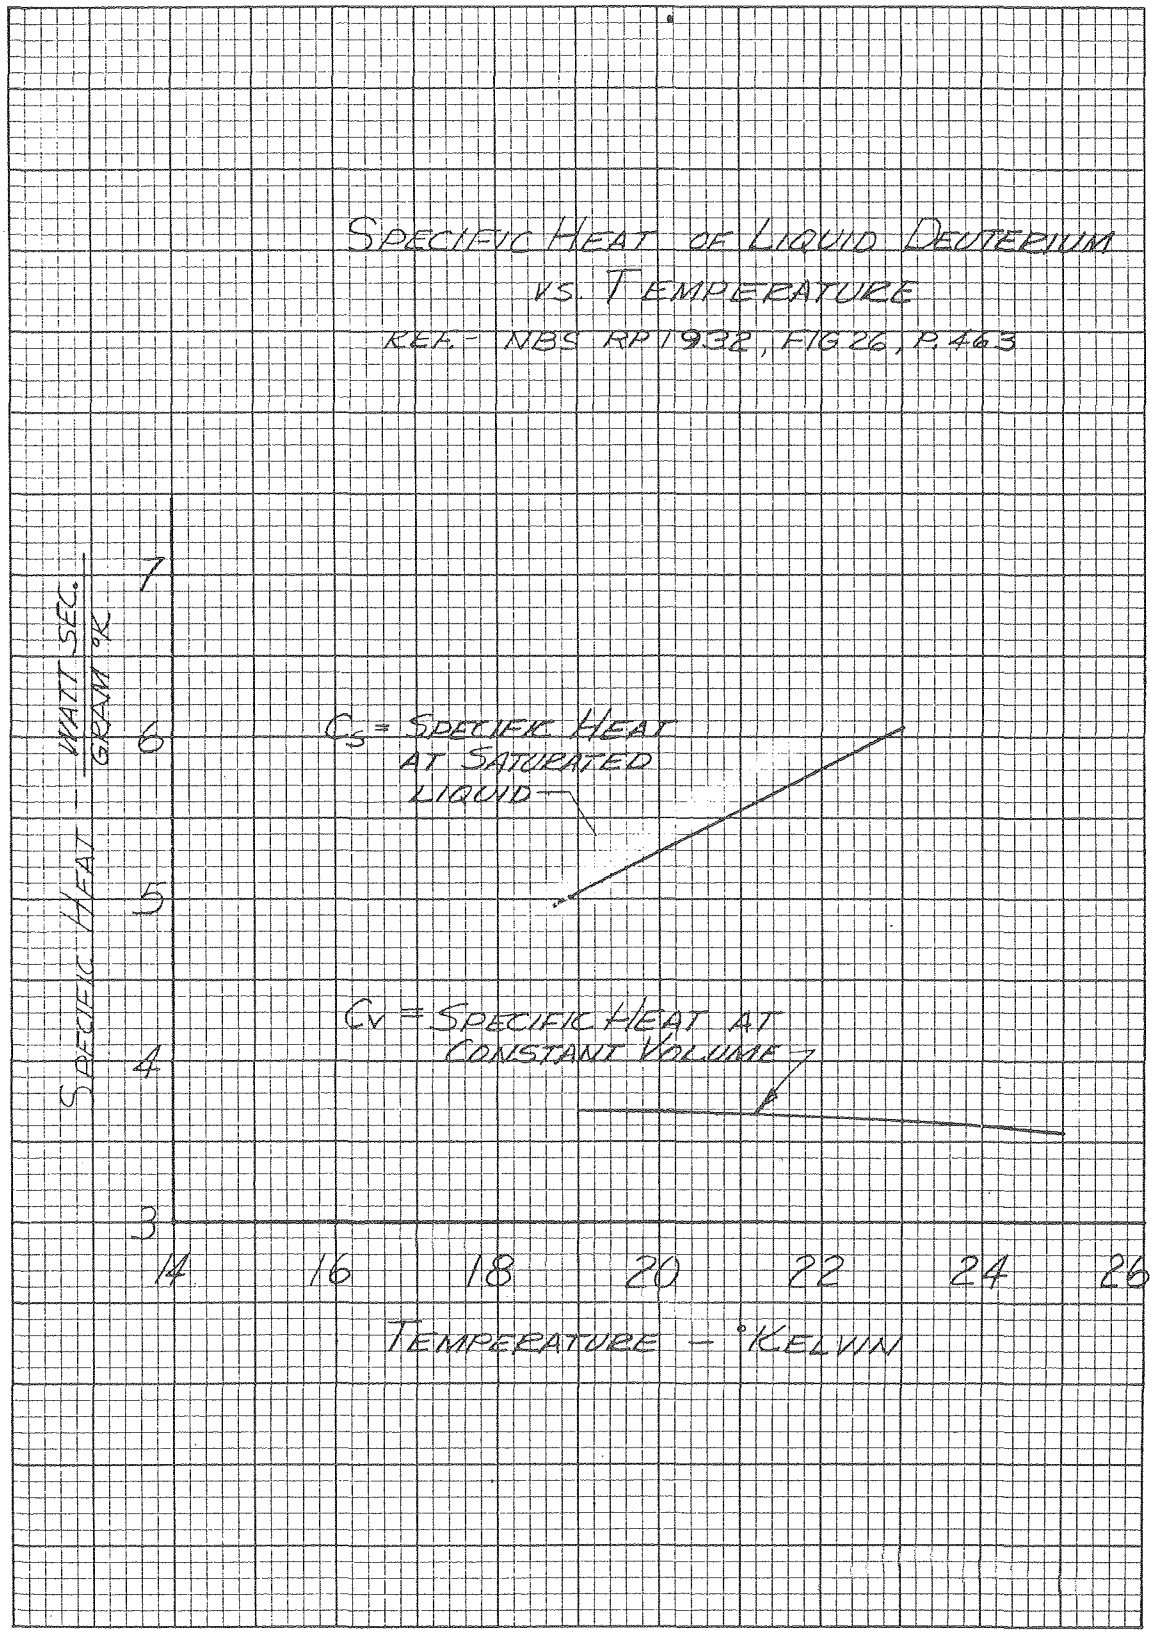
SPECIFIC HEAT OF LIQUID DEUTERIUM
VS. TEMPERATURE
REF. - NBS RP1932, FIG 26, P. 463
SPECIFIC HEAT - WATT SEC. / GRAM °K
7
6
5
4
3
C_S = SPECIFIC HEAT AT SATURATED LIQUID
C_V = SPECIFIC HEAT AT CONSTANT VOLUME
14
16
18
20
22
24
26
TEMPERATURE - °KELVIN

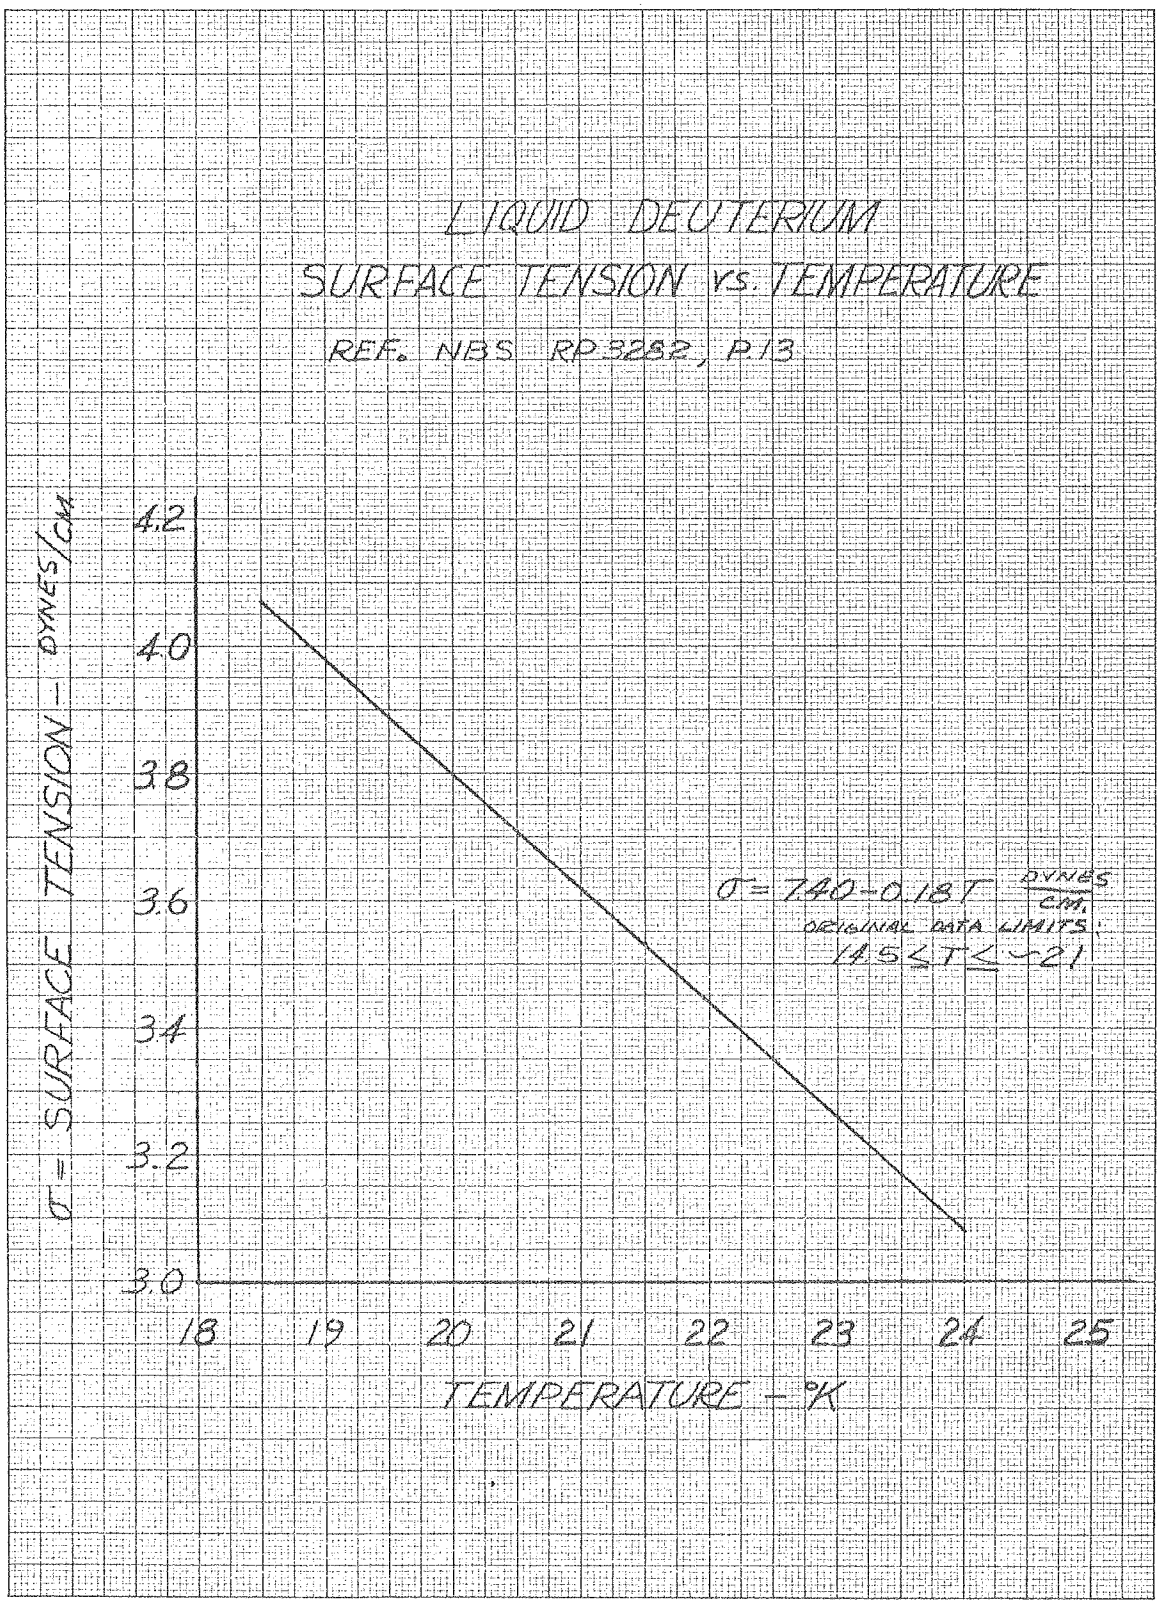
LIQUID DEUTERIUM
SURFACE TENSION vs. TEMPERATURE
REF. NBS RP 3282, P.13
σ = SURFACE TENSION – DYNES/CM
4.2
4.0
3.8
3.6
3.4
3.2
3.0
σ = 7.40 – 0.18 T DYNES/CM.
ORIGINAL DATA LIMITS:
14.5 ≤ T ≤ ~21
18
19
20
21
22
23
24
25
TEMPERATURE – °K

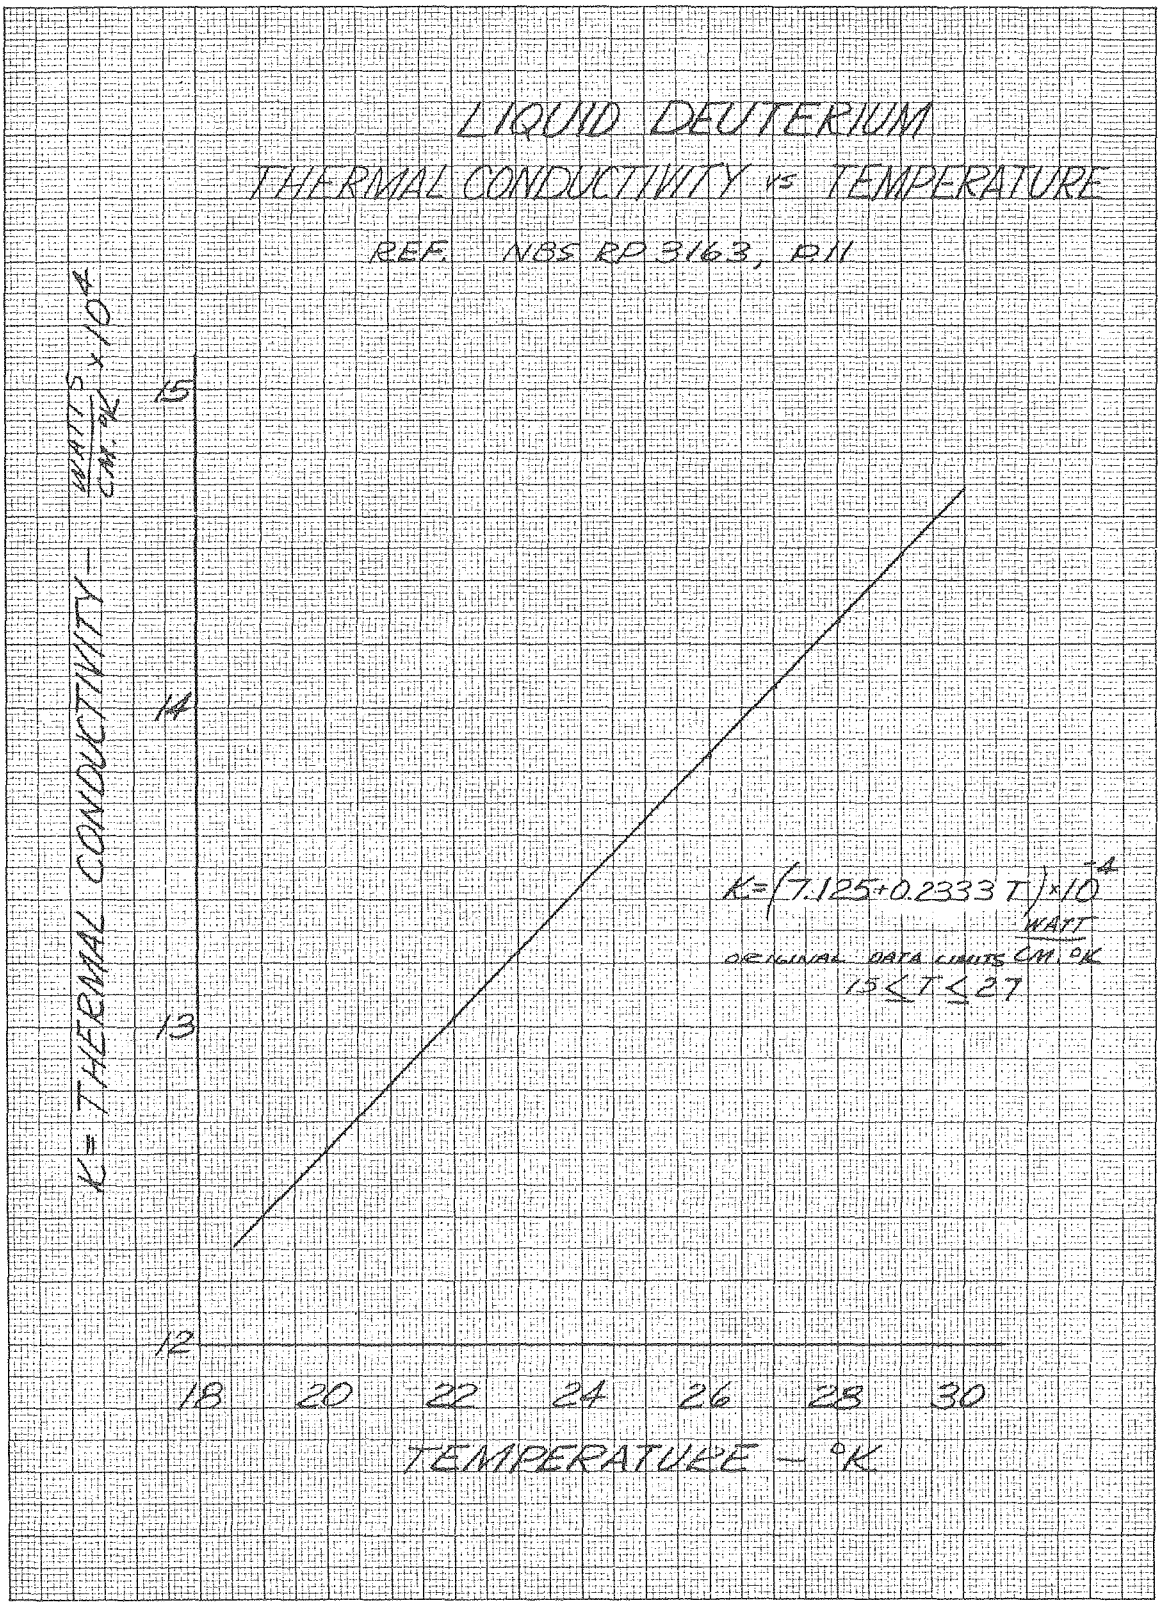
LIQUID DEUTERIUM
THERMAL CONDUCTIVITY vs TEMPERATURE
REF. NBS RP 3163, P.11
K = THERMAL CONDUCTIVITY — WATTS/CM. °K ×10⁴
15
14
13
12
18
20
22
24
26
28
30
TEMPERATURE — °K
K=(7.125+0.2333 T)×10⁻⁴ WATT/CM. °K
ORIGINAL DATA LIMITS
15 ≤ T ≤ 27

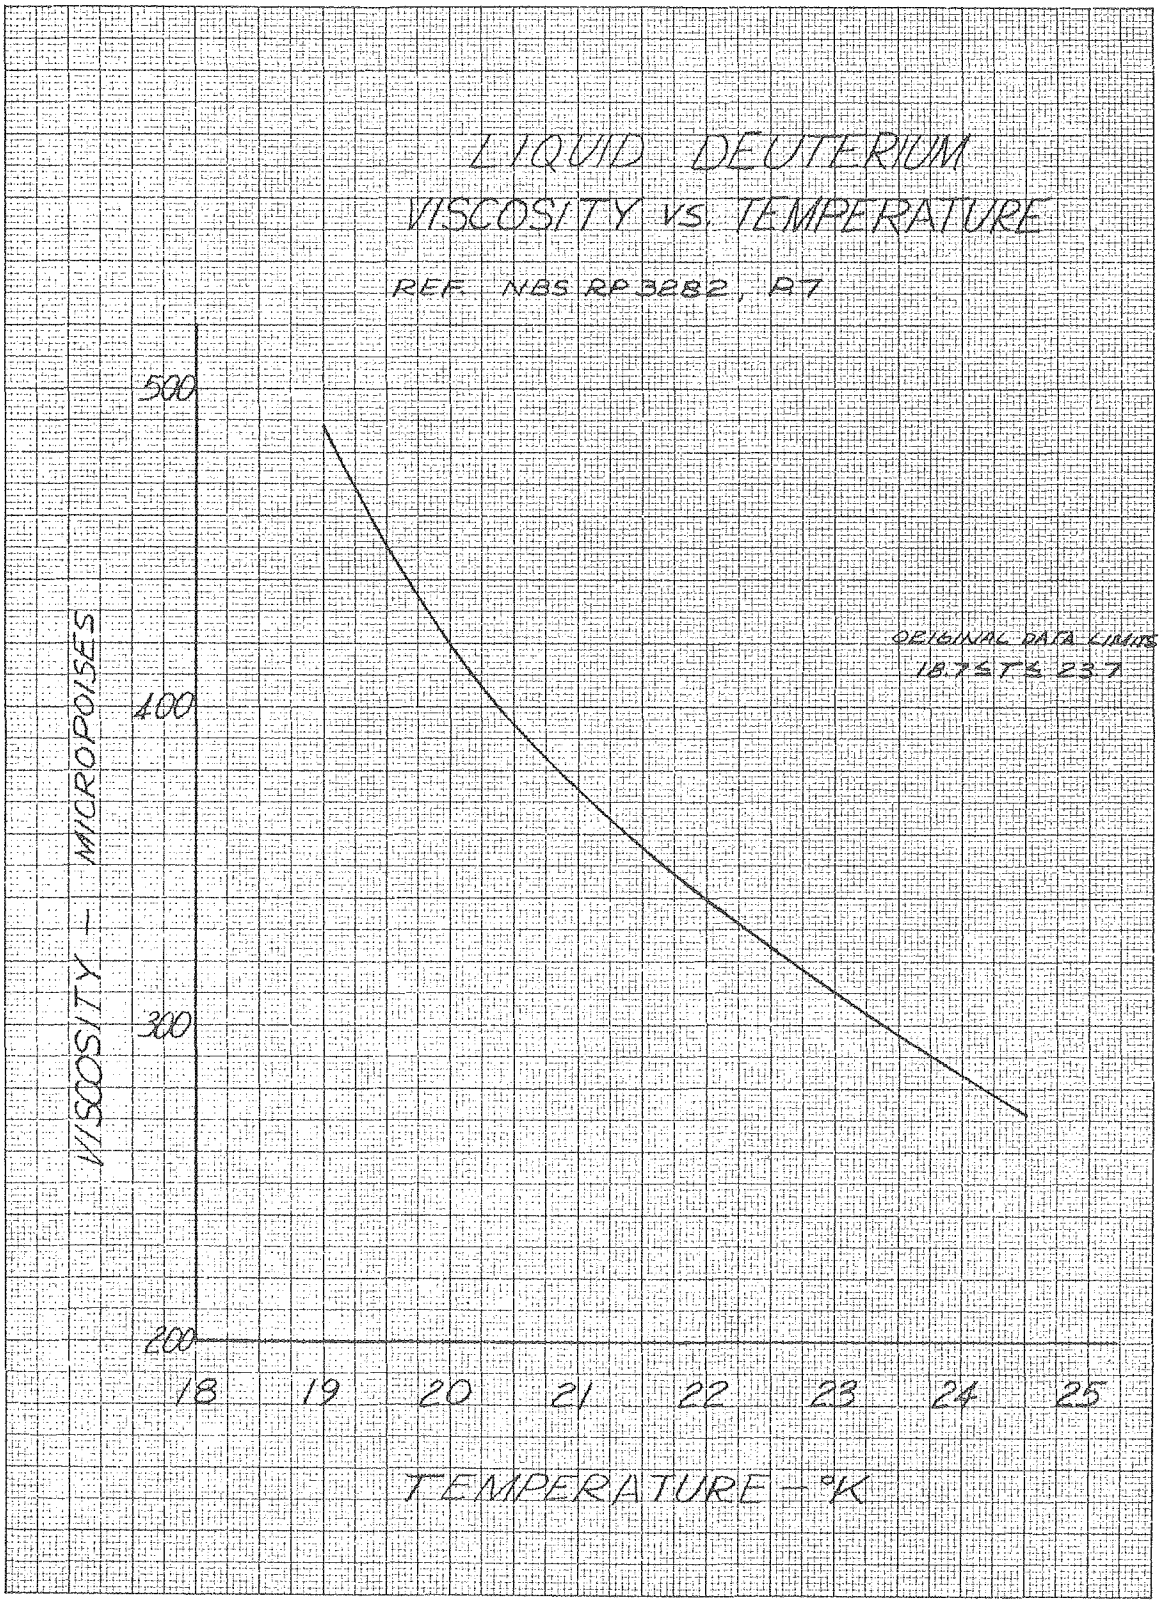
LIQUID DEUTERIUM
VISCOSITY VS. TEMPERATURE
REF. NBS RP 3282, P7
ORIGINAL DATA LIMITS
18.7 ≤ T ≤ 23.7
VISCOSITY – MICROPOISES
500
400
300
200
18
19
20
21
22
23
24
25
TEMPERATURE – °K

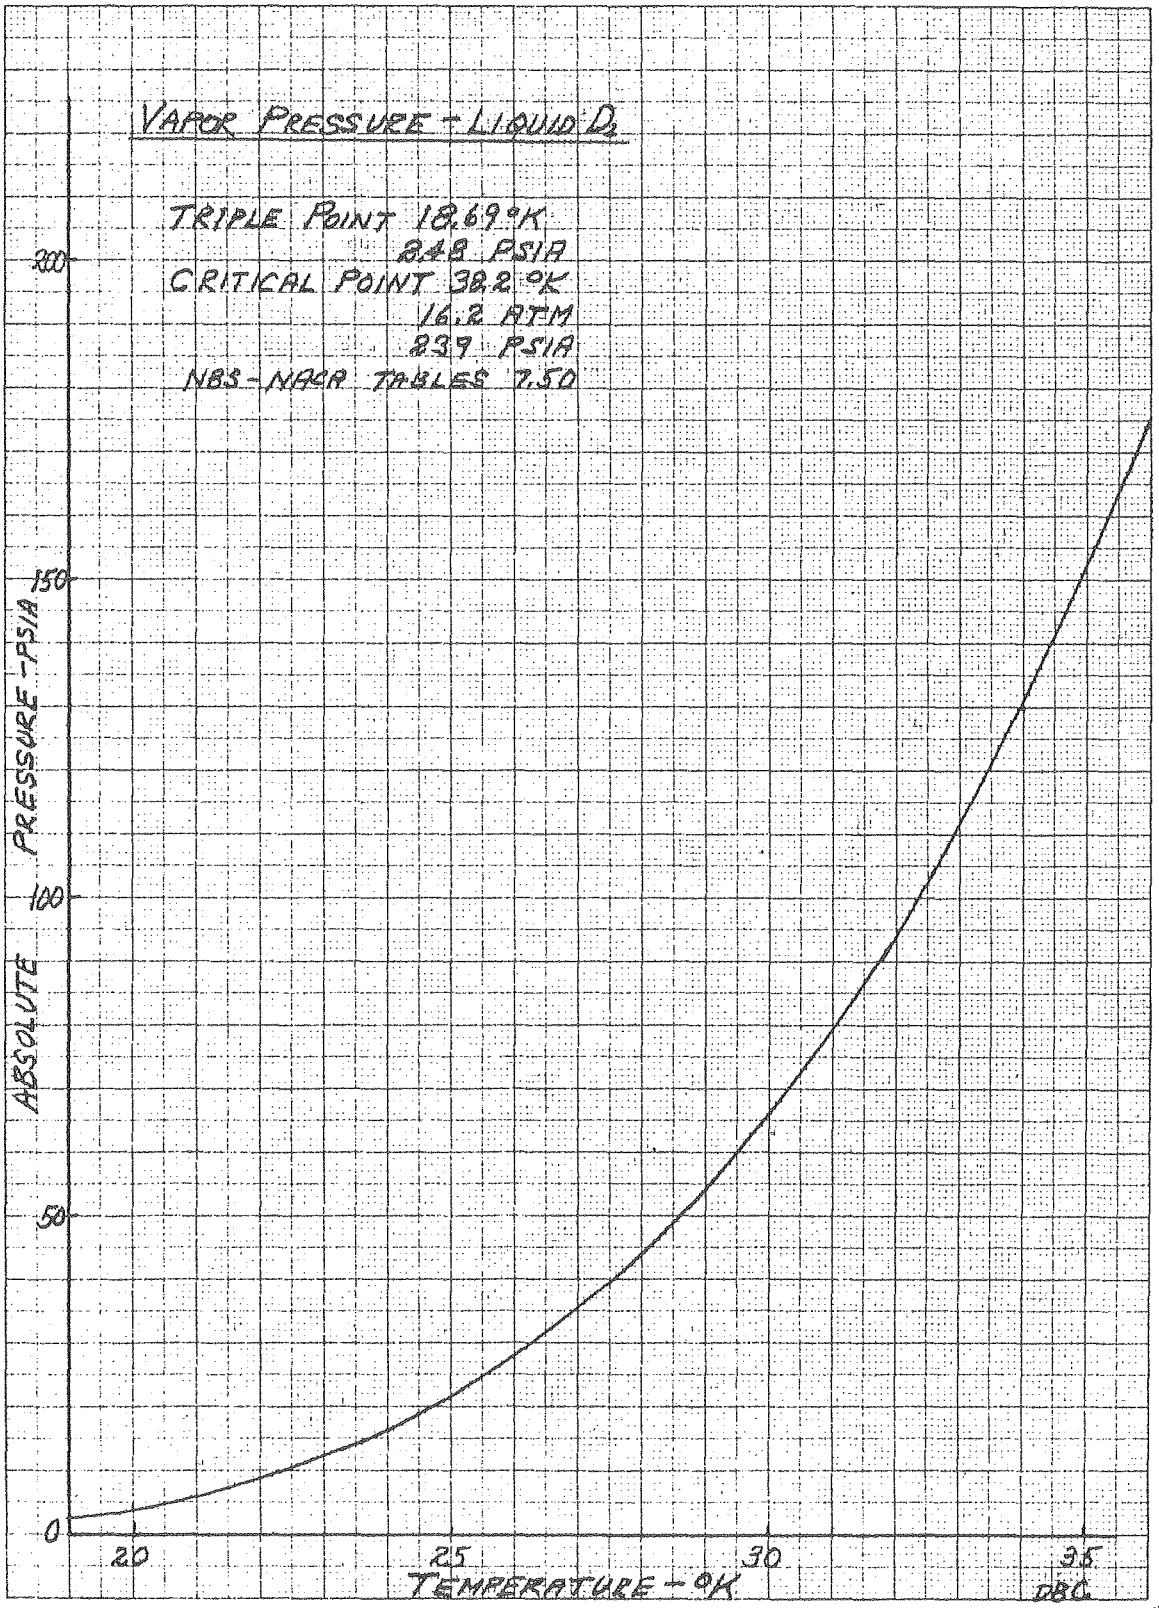
VAPOR PRESSURE - LIQUID D_2
TRIPLE POINT 18.69 °K
2.48 PSIA
CRITICAL POINT 38.2 °K
16.2 ATM
237 PSIA
NBS-NACA TABLES 7.50
ABSOLUTE PRESSURE - PSIA
300
150
100
50
0
20
25
30
35
TEMPERATURE - °K
DBC

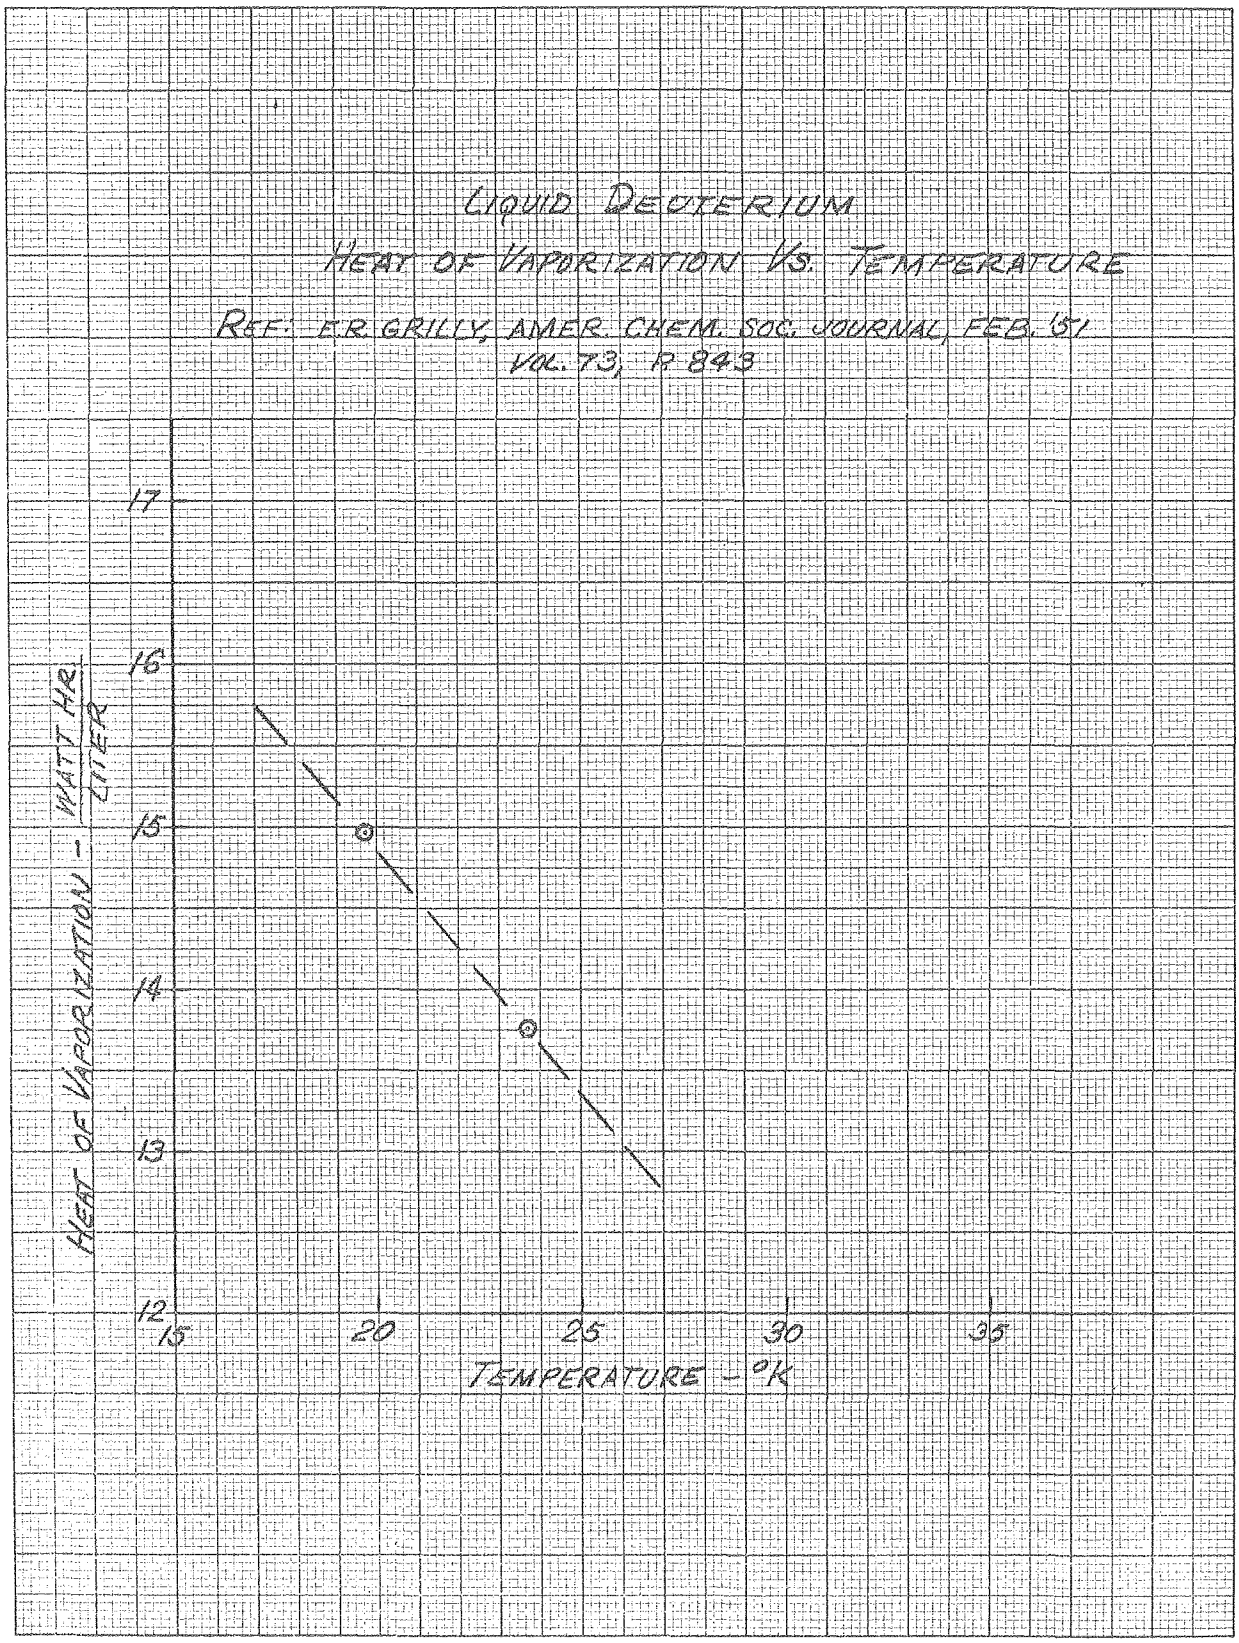
LIQUID DEUTERIUM
HEAT OF VAPORIZATION VS. TEMPERATURE
REF: E.R. GRILLY, AMER. CHEM. SOC. JOURNAL, FEB. '51
VOL. 73, P 843
HEAT OF VAPORIZATION - WATT HR / LITER
17
16
15
14
13
12
15
20
25
30
35
TEMPERATURE - °K

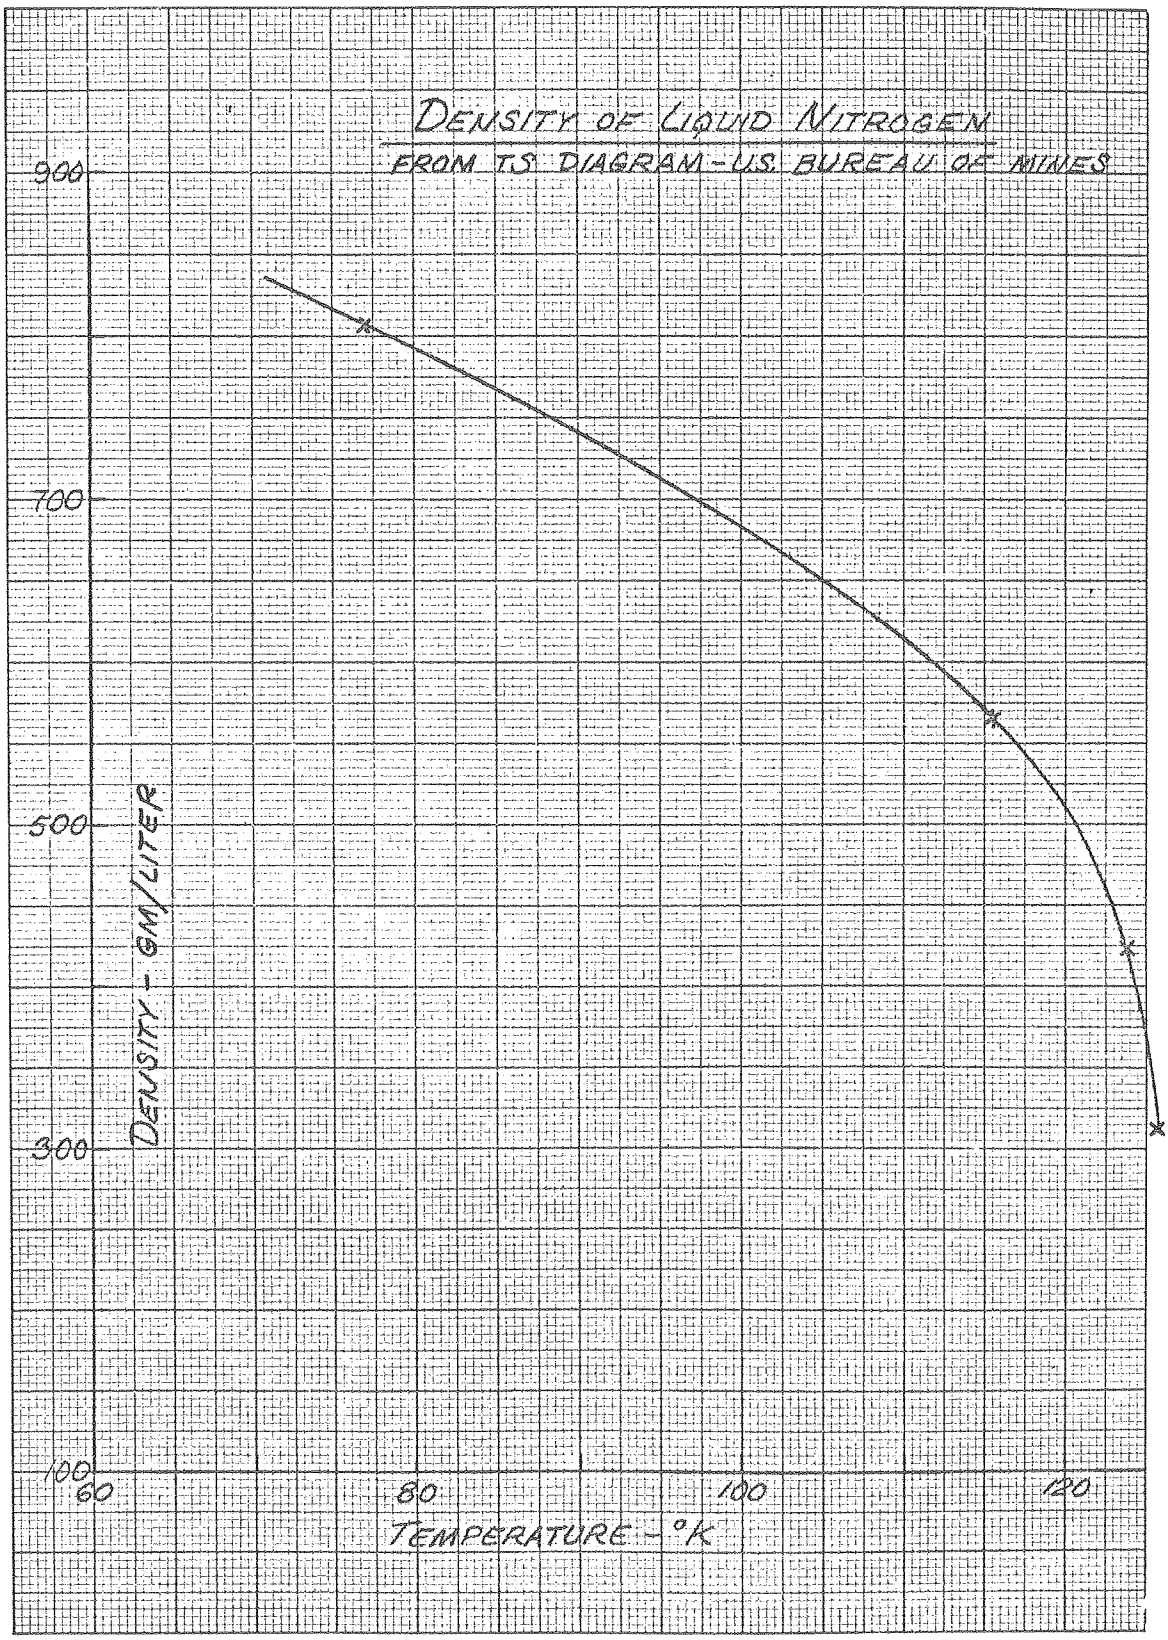
DENSITY OF LIQUID NITROGEN
FROM TS DIAGRAM - U.S. BUREAU OF MINES
900
700
500
300
100
DENSITY - GM/LITER
60
80
100
120
TEMPERATURE - °K

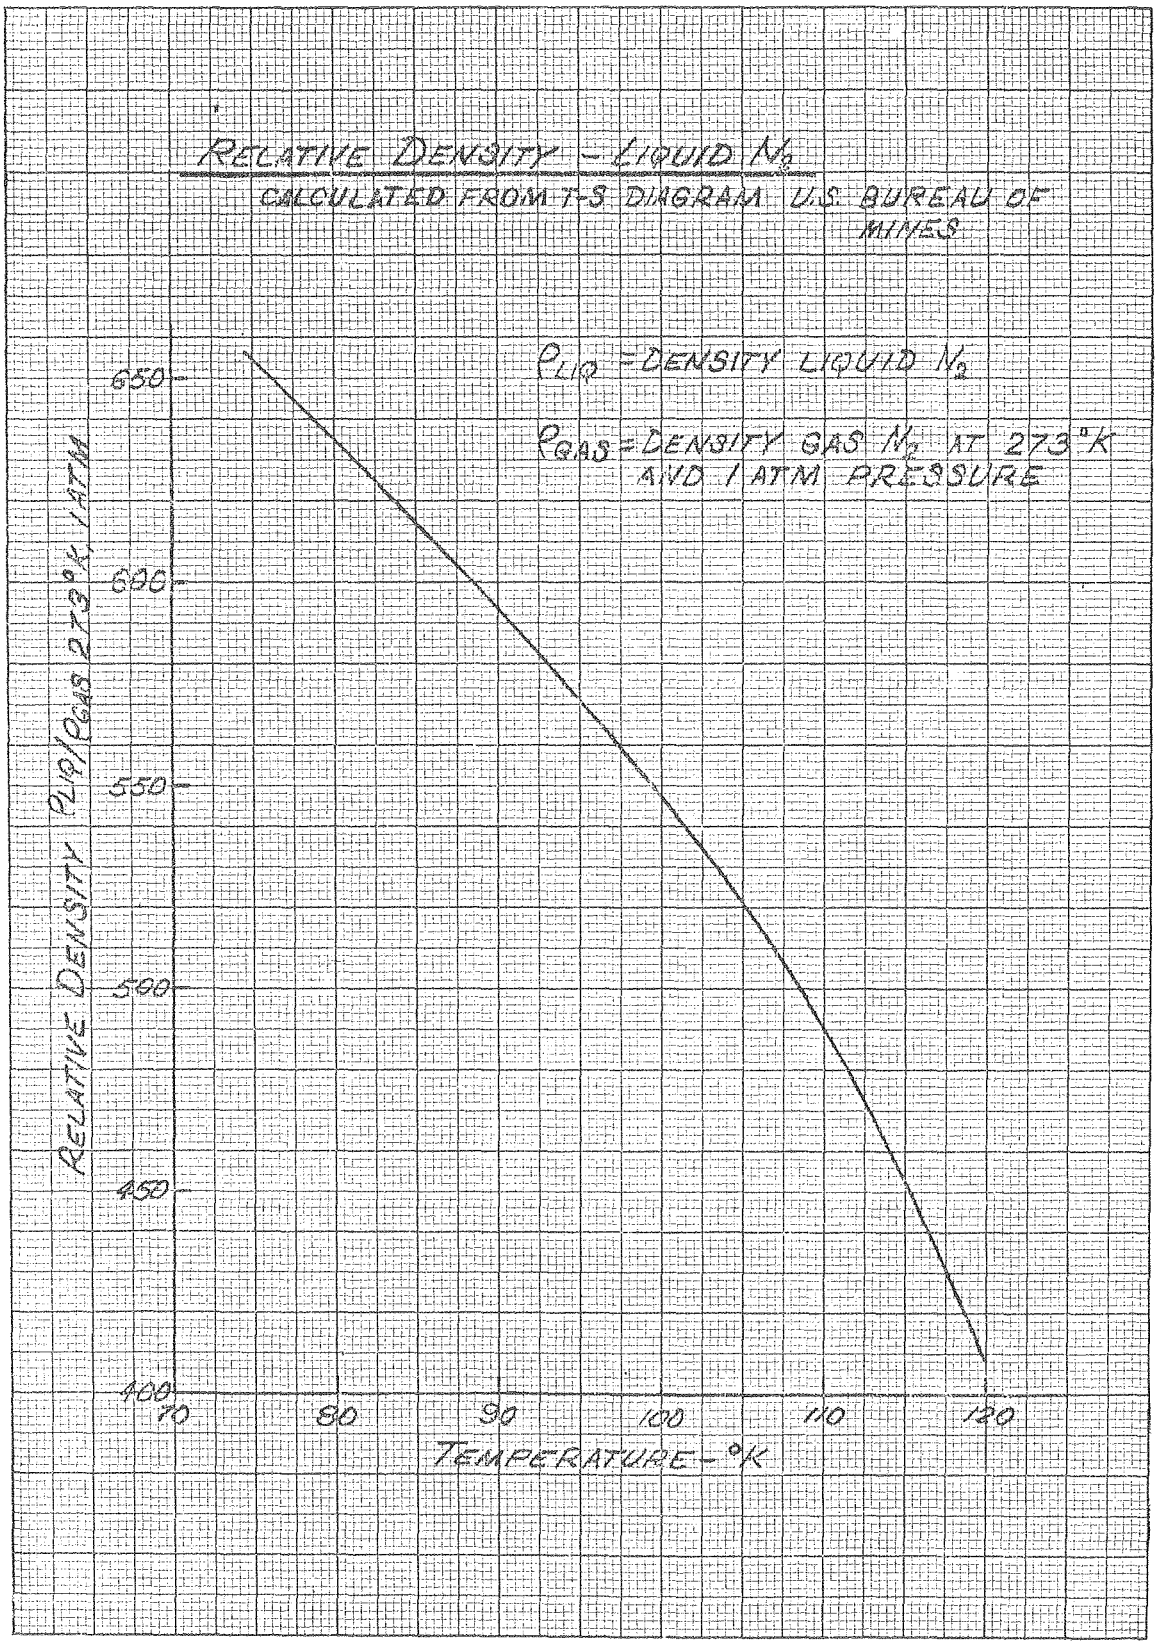
RELATIVE DENSITY - LIQUID N_2
CALCULATED FROM T-S DIAGRAM U.S. BUREAU OF MINES
ρ_{LIQ} = DENSITY LIQUID N_2
ρ_{GAS} = DENSITY GAS N_2 AT 273°K AND 1 ATM PRESSURE
RELATIVE DENSITY ρ_{LIQ}/ρ_{GAS} 273°K, 1 ATM
650
600
550
500
450
400
70
80
90
100
110
120
TEMPERATURE - °K

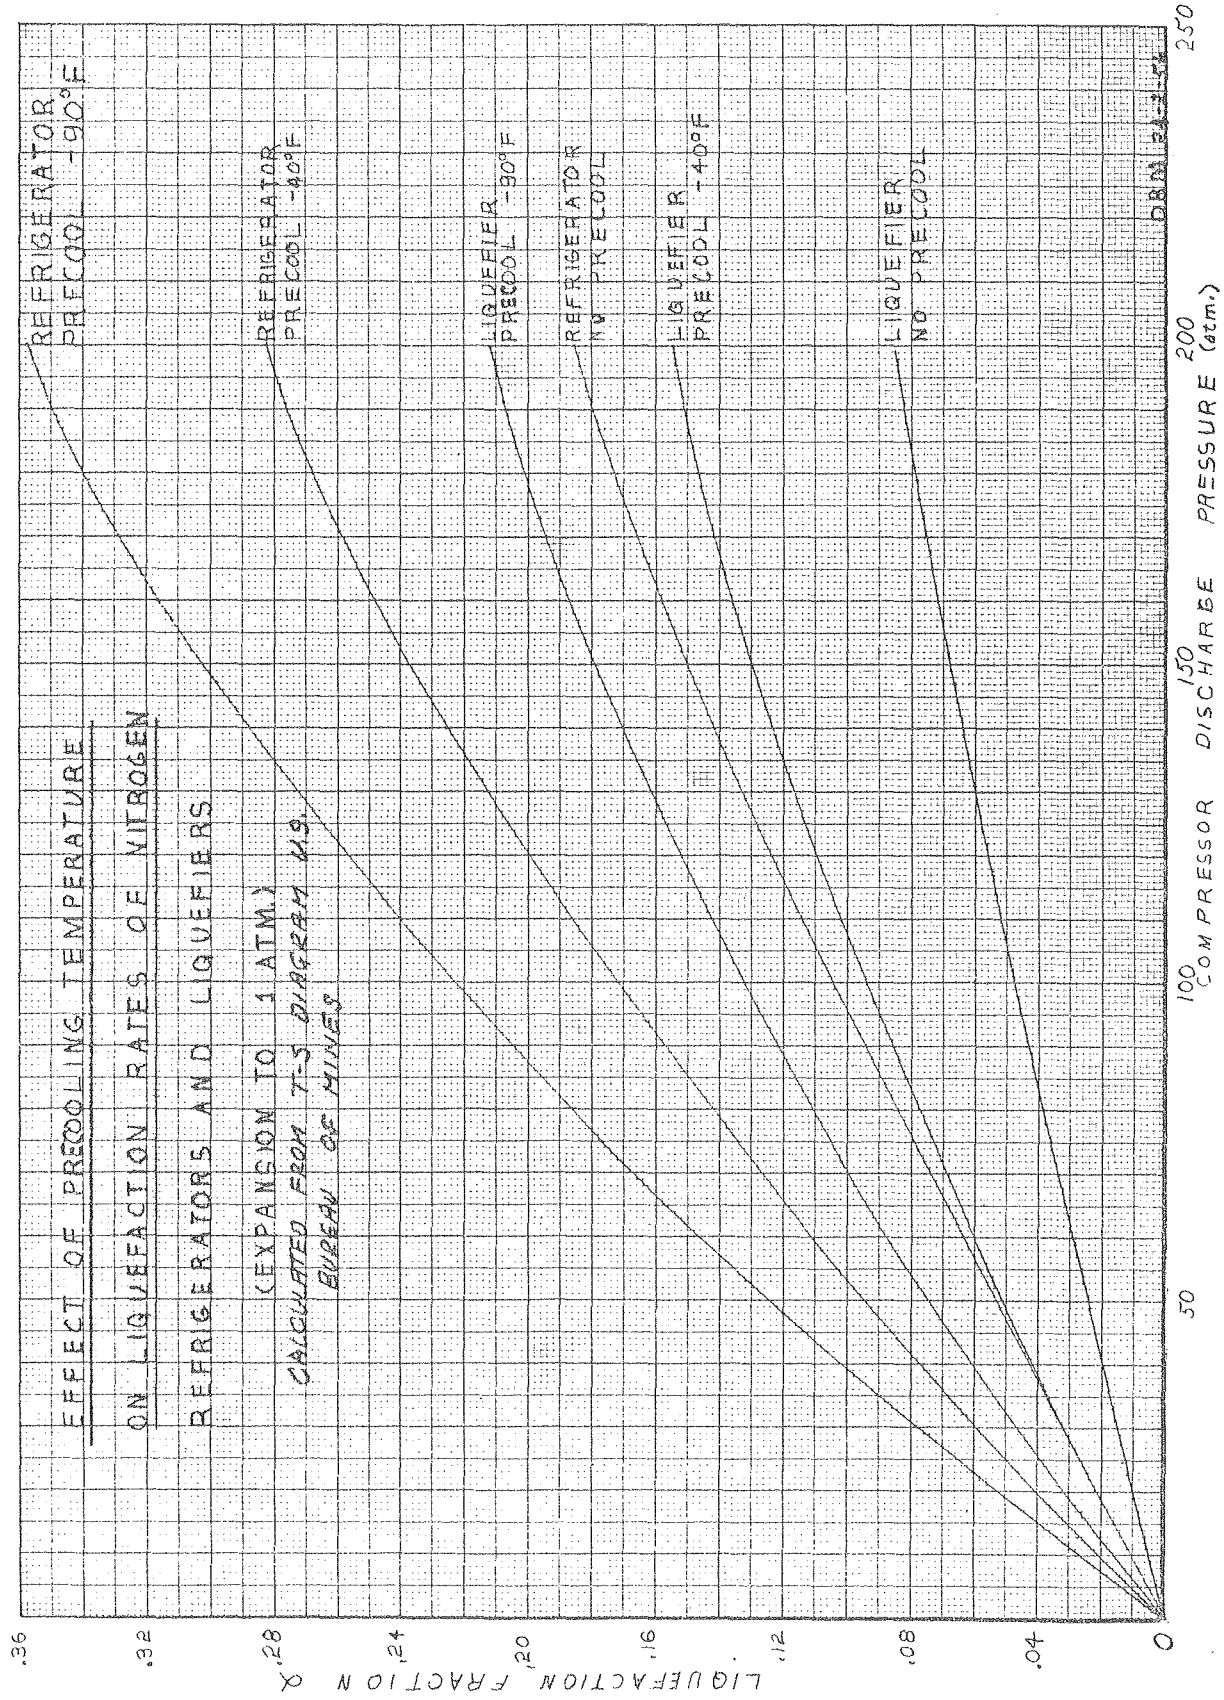
EFFECT OF PRECOOLING TEMPERATURE
ON LIQUEFACTION RATES OF NITROGEN
REFRIGERATORS AND LIQUEFIERS
(EXPANSION TO 1 ATM.)
CALCULATED FROM T-S DIAGRAM U.S.
BUREAU OF MINES
REFRIGERATOR
PRECOOL -90°F
REFRIGERATOR
PRECOOL -40°F
LIQUEFIER
PRECOOL -90°F
REFRIGERATOR
NO PRECOOL
LIQUEFIER
PRECOOL -40°F
LIQUEFIER
NO PRECOOL
LIQUEFACTION FRACTION X
.36
.32
.28
.24
.20
.16
.12
.08
.04
0
50
100
150
200
250
COMPRESSOR DISCHARGE PRESSURE (atm.)

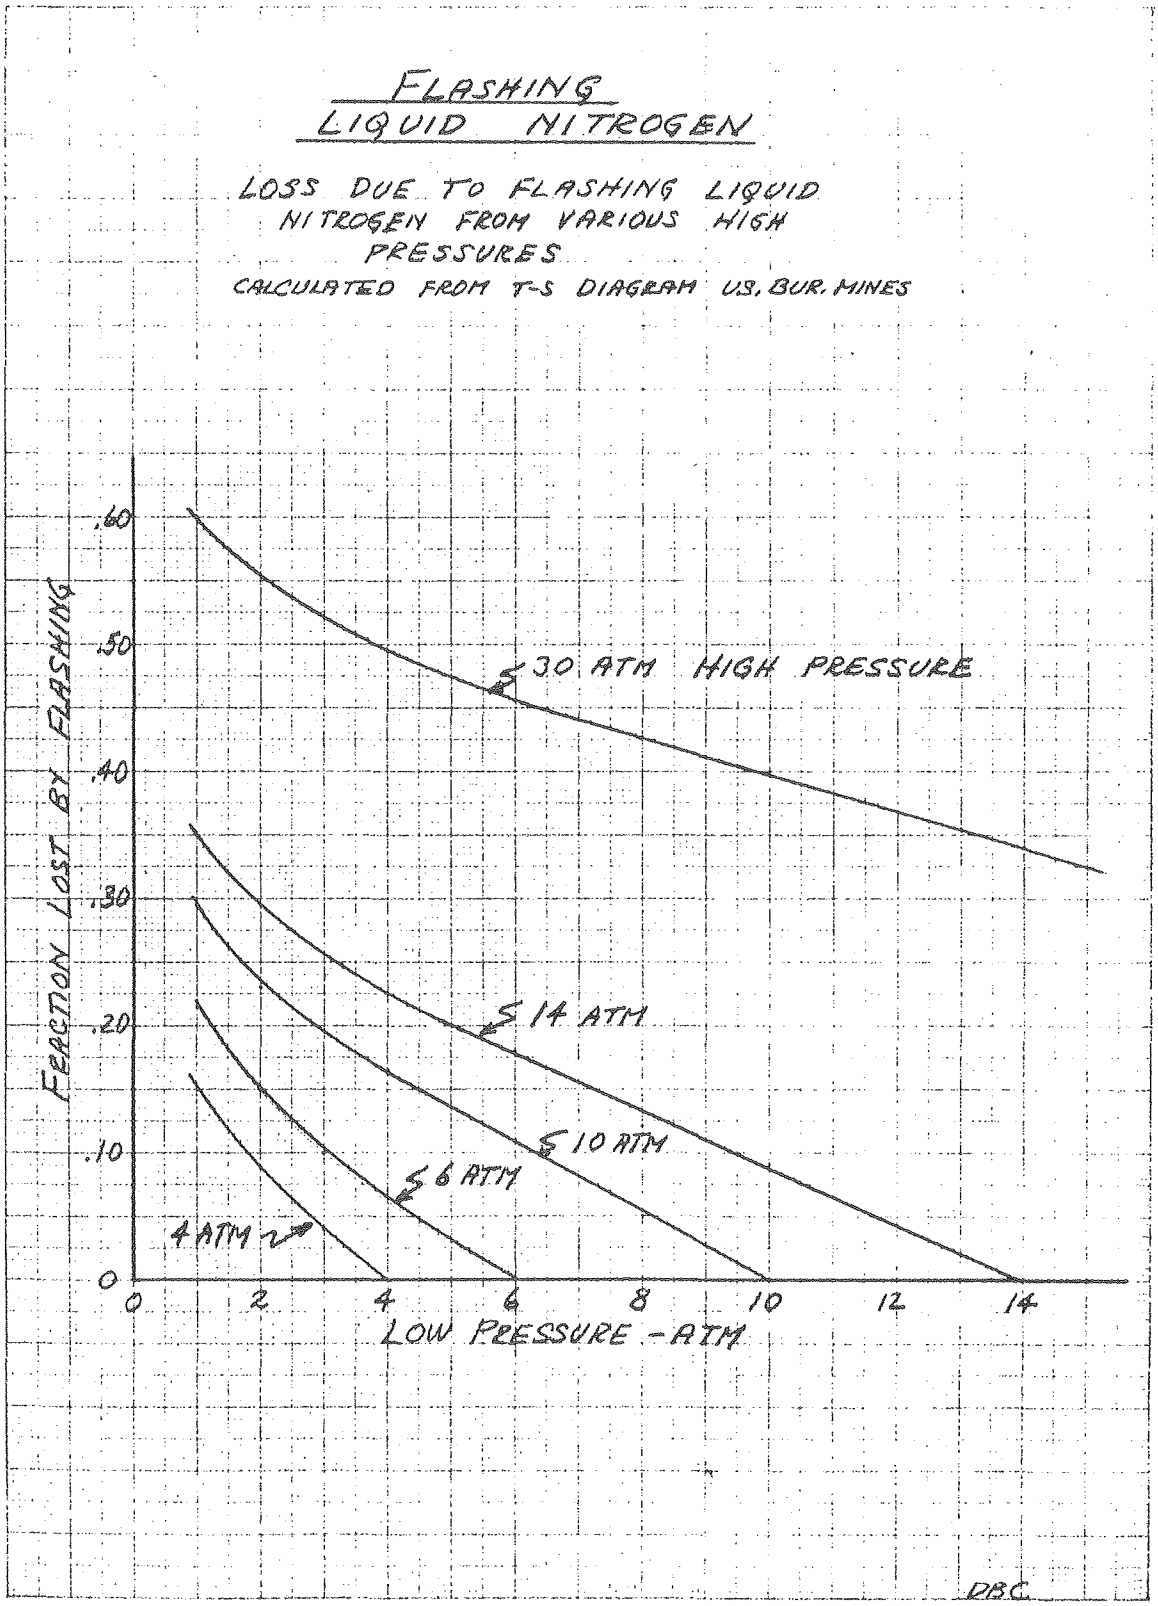
FLASHING
LIQUID NITROGEN
LOSS DUE TO FLASHING LIQUID NITROGEN FROM VARIOUS HIGH PRESSURES
CALCULATED FROM T-S DIAGRAM US. BUR. MINES
FRACTION LOST BY FLASHING
.60
.50
.40
.30
.20
.10
0
30 ATM HIGH PRESSURE
14 ATM
10 ATM
6 ATM
4 ATM
0
2
4
6
8
10
12
14
LOW PRESSURE - ATM
DBC

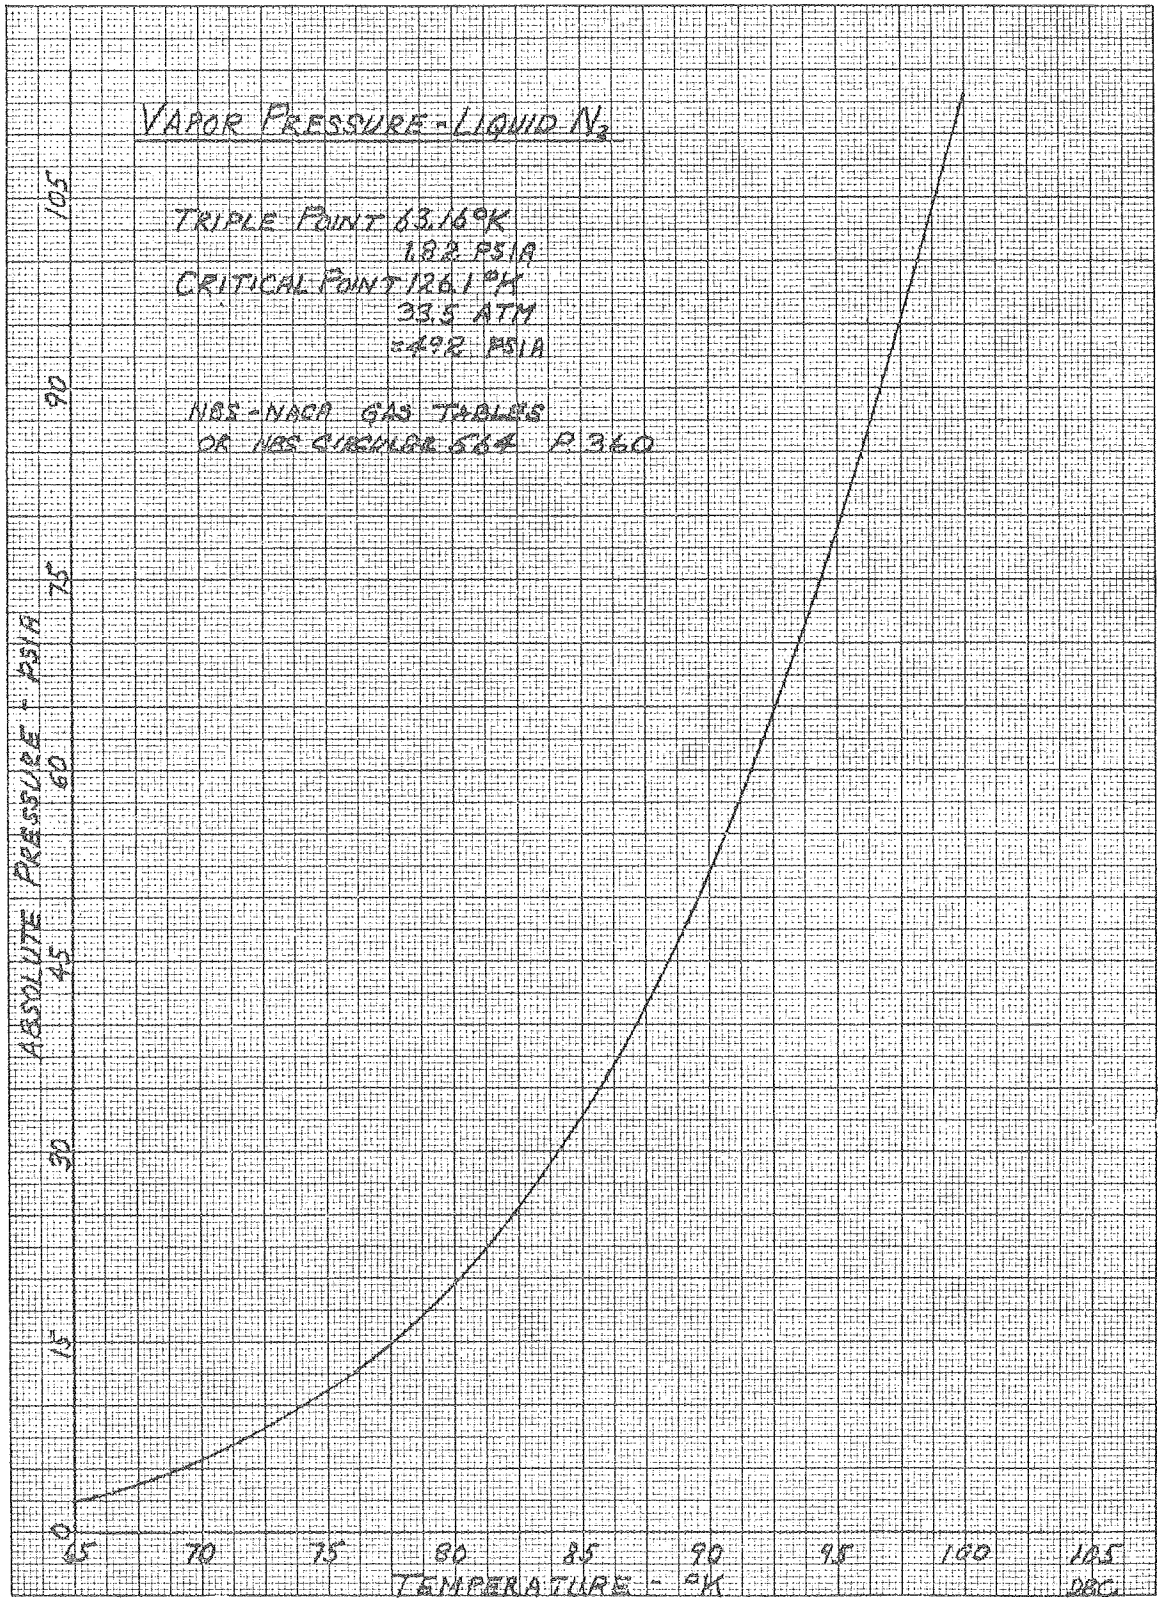
VAPOR PRESSURE - LIQUID N_2
TRIPLE POINT 63.16°K
1.82 PSIA
CRITICAL POINT 126.1°K
33.5 ATM
=492 PSIA
NBS - NACA GAS TABLES
OR NBS CIRCULAR 564 P 360
ABSOLUTE PRESSURE - PSIA
0
15
30
45
60
75
90
105
65
70
75
80
85
90
95
100
105
TEMPERATURE - °K
DBC

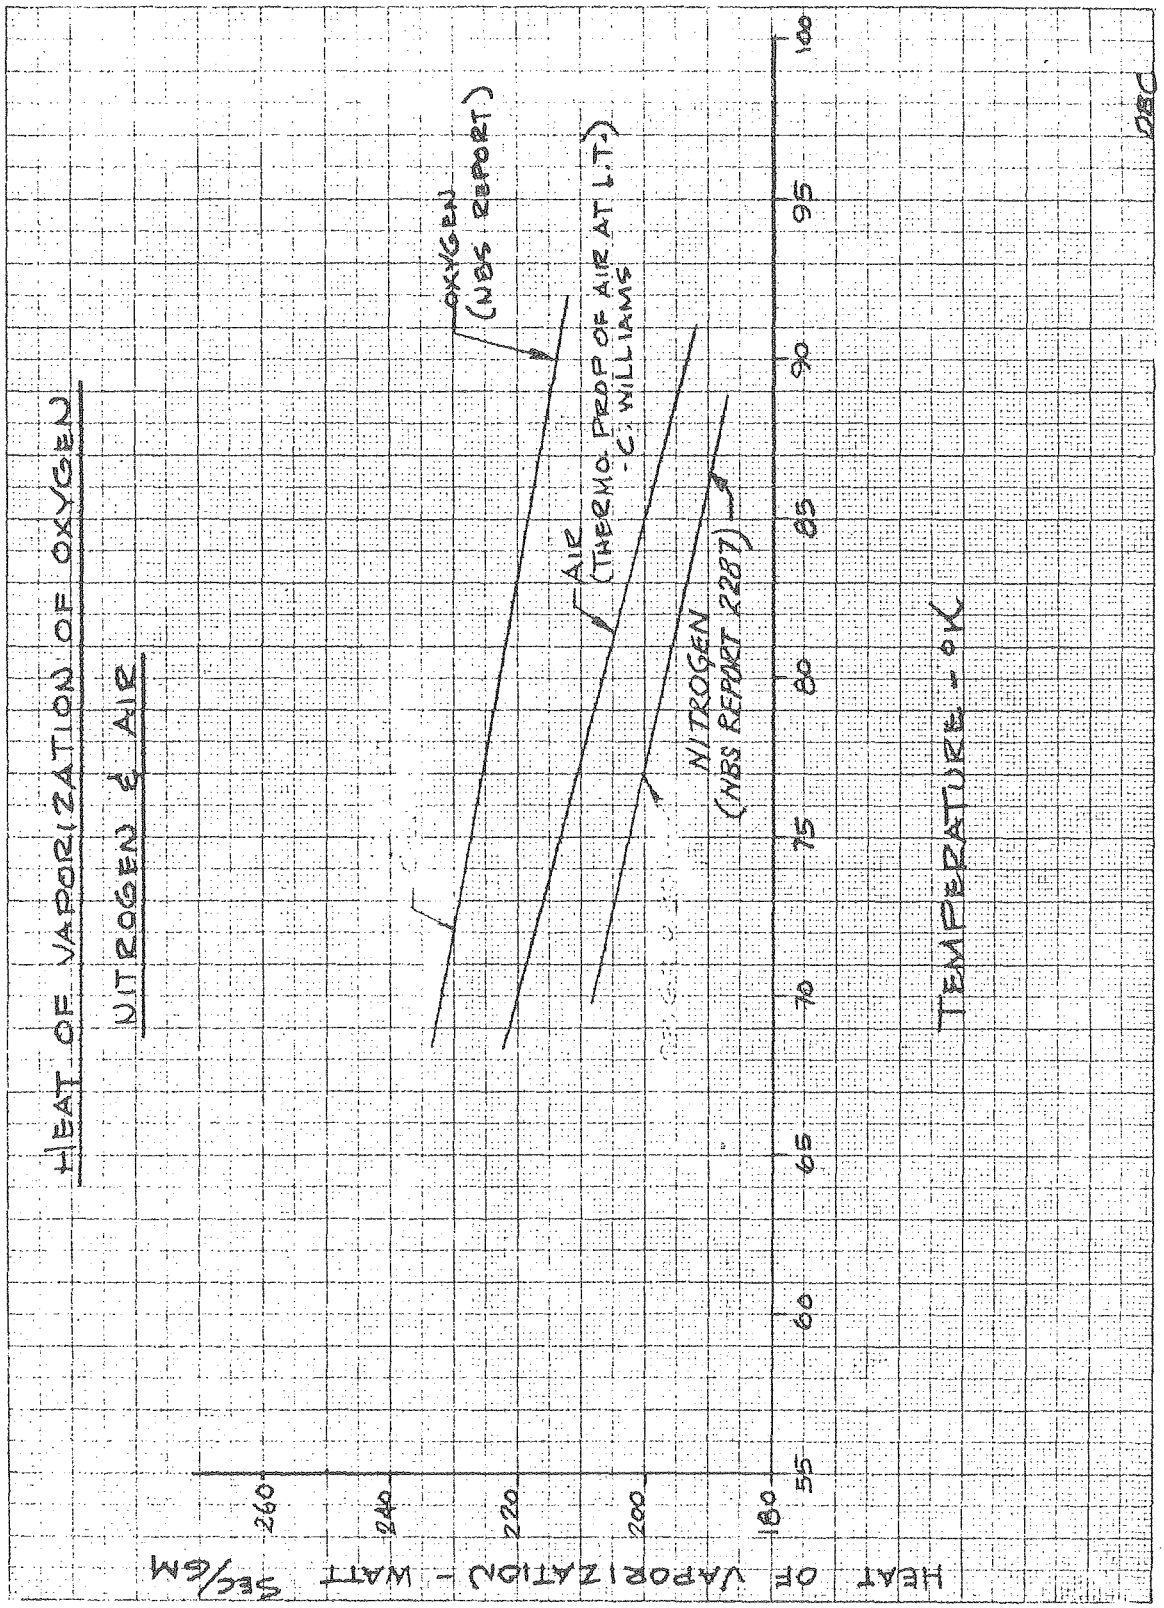
HEAT OF VAPORIZATION OF OXYGEN
NITROGEN & AIR
OXYGEN
(NBS REPORT)
AIR
(THERMO. PROP OF AIR AT L.T.)
C. WILLIAMS
NITROGEN
(NBS REPORT 2287)
HEAT OF VAPORIZATION - WATT SEC/GM
260
240
220
200
180
55
60
65
70
75
80
85
90
95
100
TEMPERATURE - °K

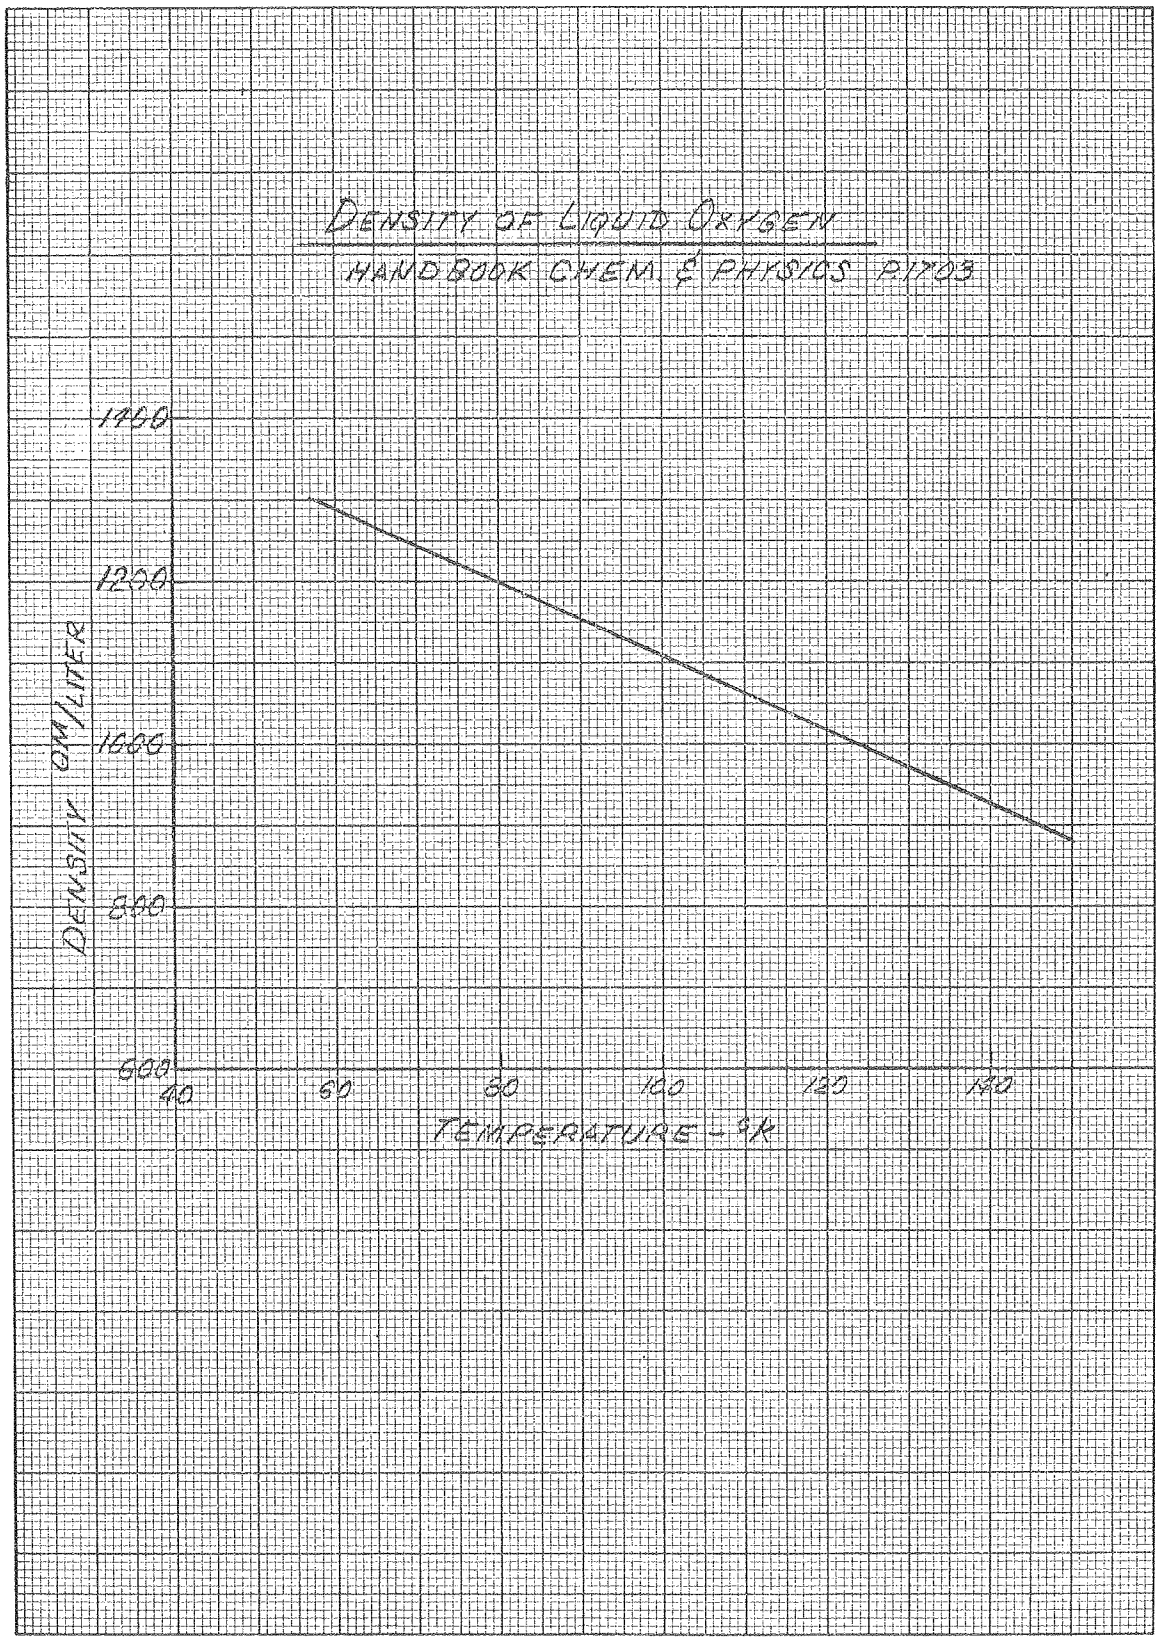
DENSITY OF LIQUID OXYGEN
HANDBOOK CHEM. & PHYSICS P1703
1400
1200
1000
800
600
DENSITY GM/LITER
40
60
80
100
120
140
TEMPERATURE - °K

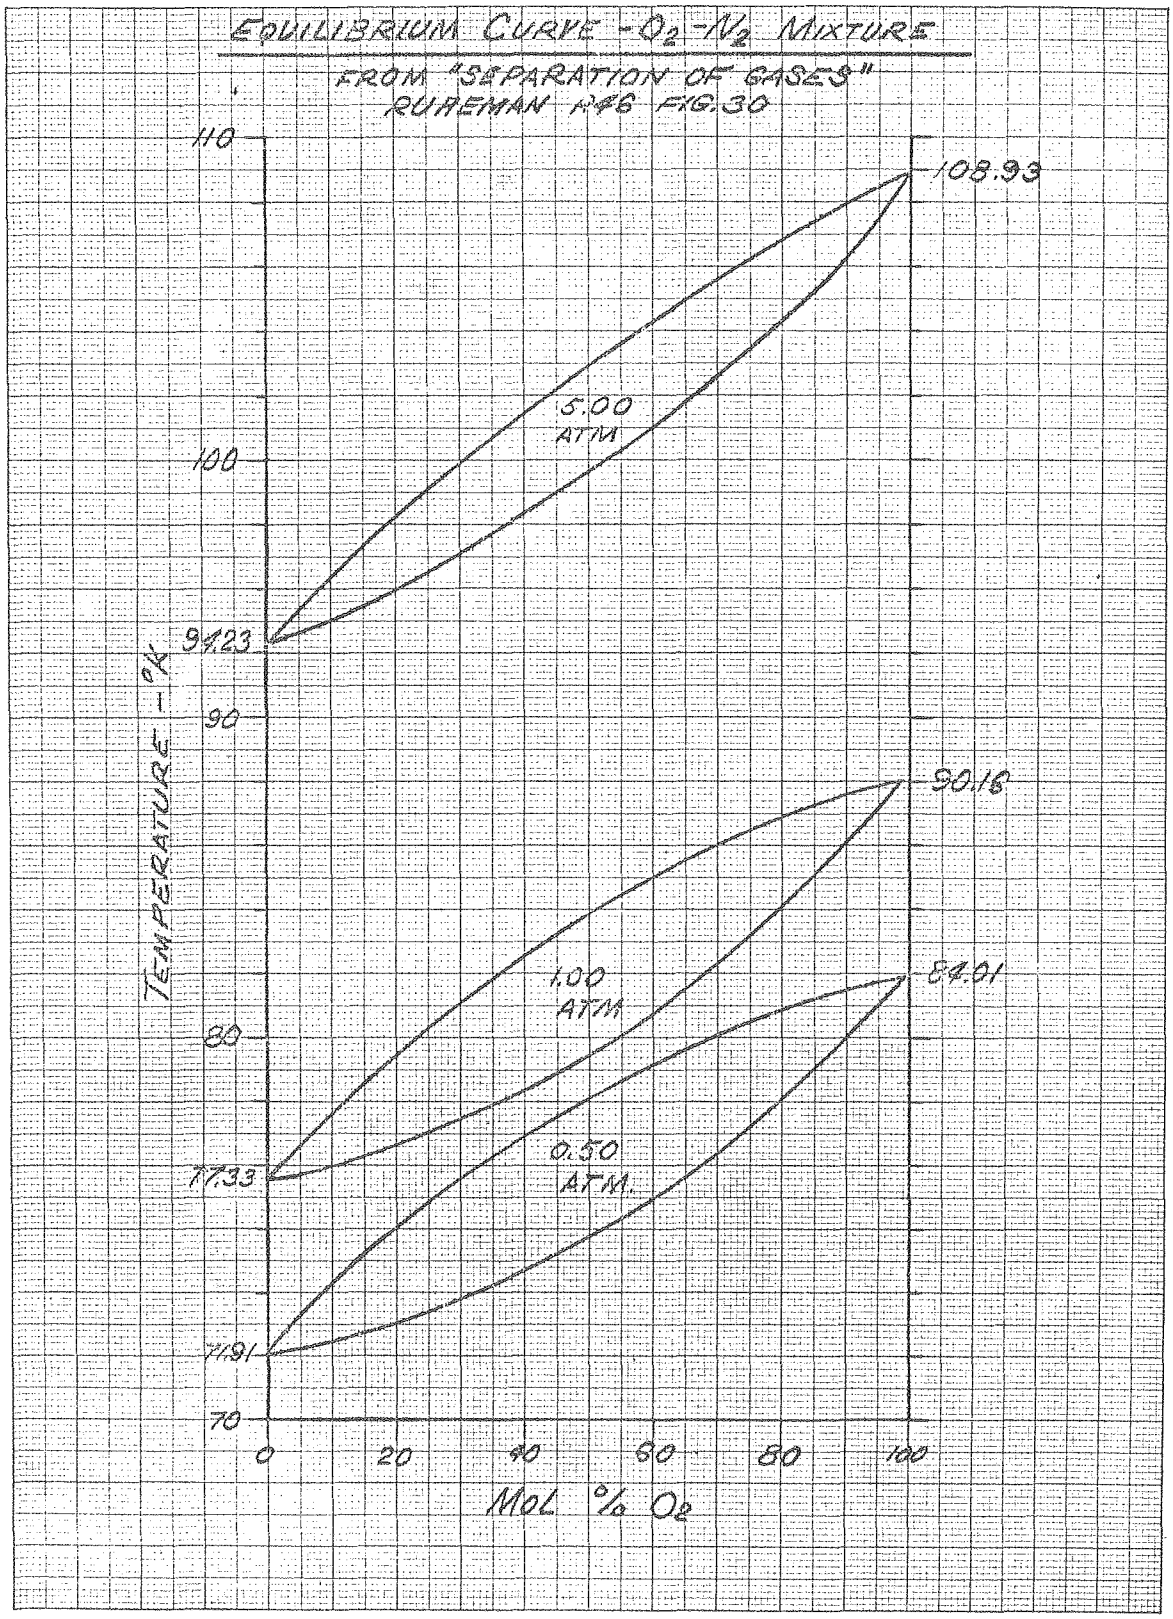
EQUILIBRIUM CURVE - O_2 - N_2 MIXTURE
FROM "SEPARATION OF GASES"
RUREMAN P46 FIG. 30
110
100
94.23
90
80
77.33
71.91
70
108.93
5.00 ATM
90.16
1.00 ATM
84.01
0.50 ATM.
0
20
40
60
80
100
TEMPERATURE - °K
MOL % O_2

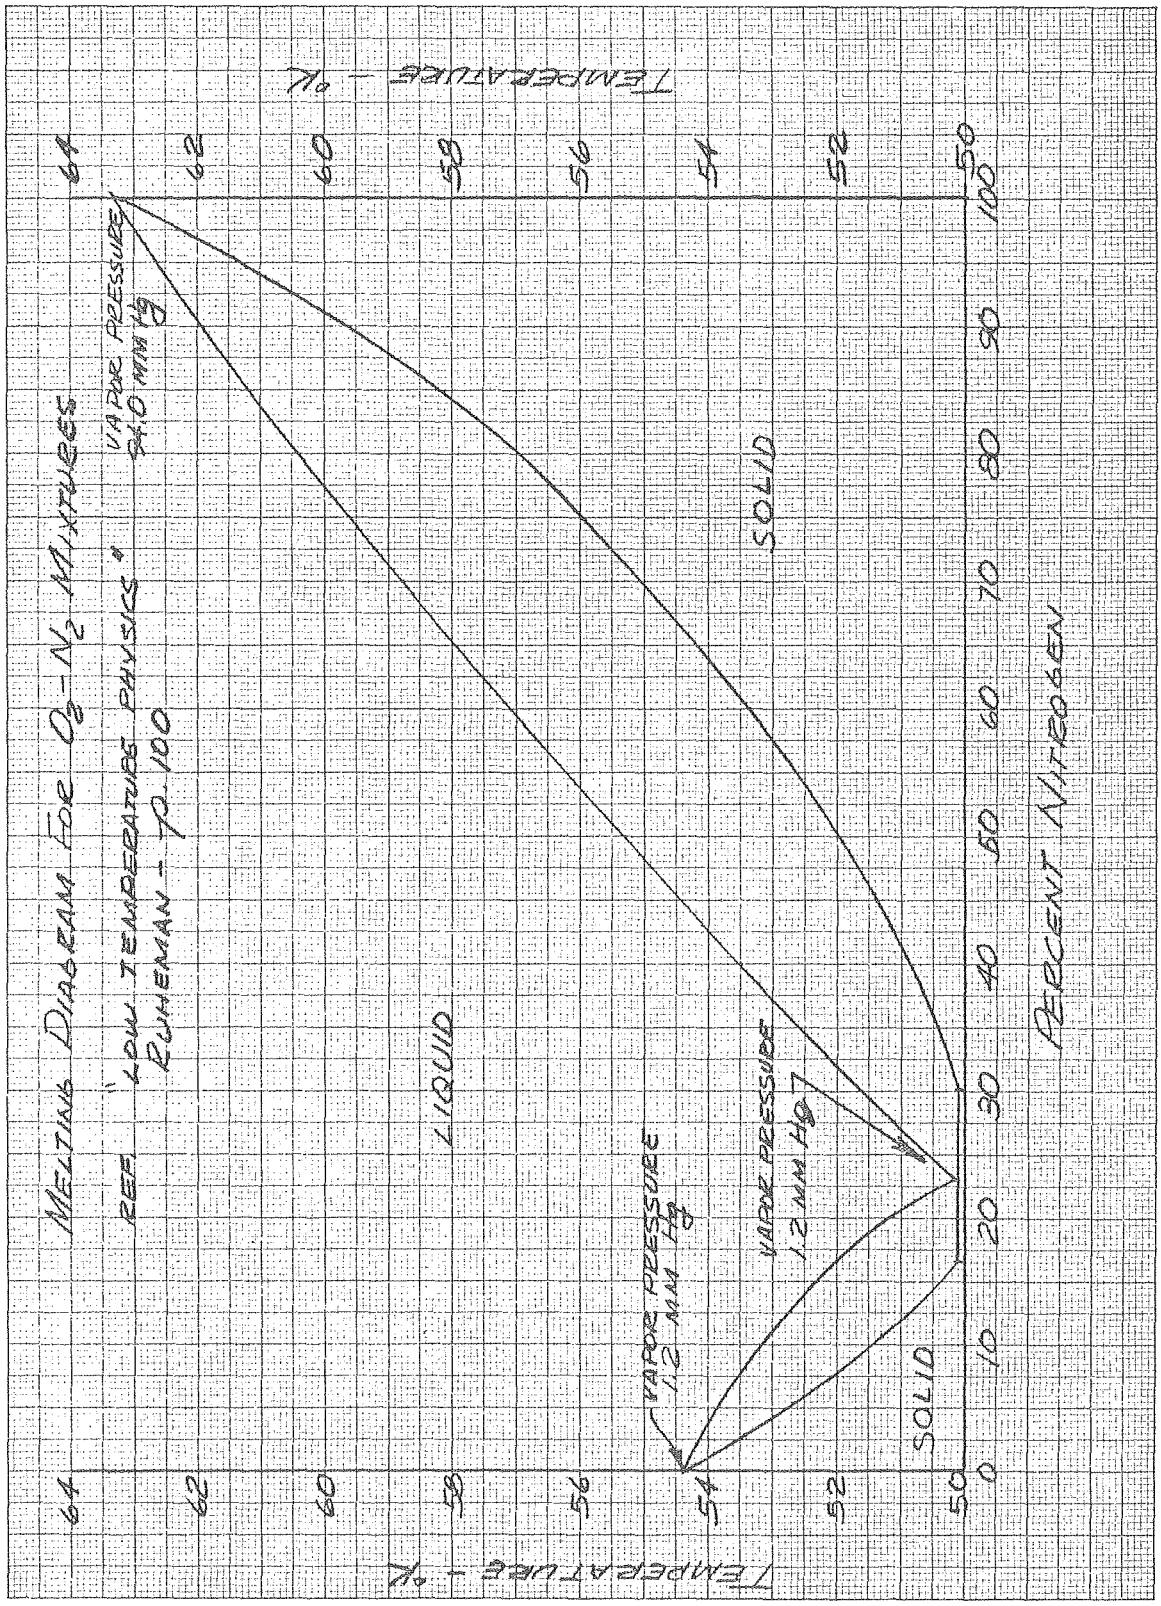
MELTING DIAGRAM FOR O_2-N_2 MIXTURES
REF. "LOW TEMPERATURE PHYSICS" RUHEMAN - p. 100
VAPOR PRESSURE 94.0 MM Hg
VAPOR PRESSURE 1.2 MM Hg
VAPOR PRESSURE 1.2 MM Hg
LIQUID
SOLID
SOLID
TEMPERATURE - °K
TEMPERATURE - °K
PERCENT NITROGEN
64
62
60
58
56
54
52
50
0
10
20
30
40
50
60
70
80
90
100

HELIUM GAS LIQUEFACTION

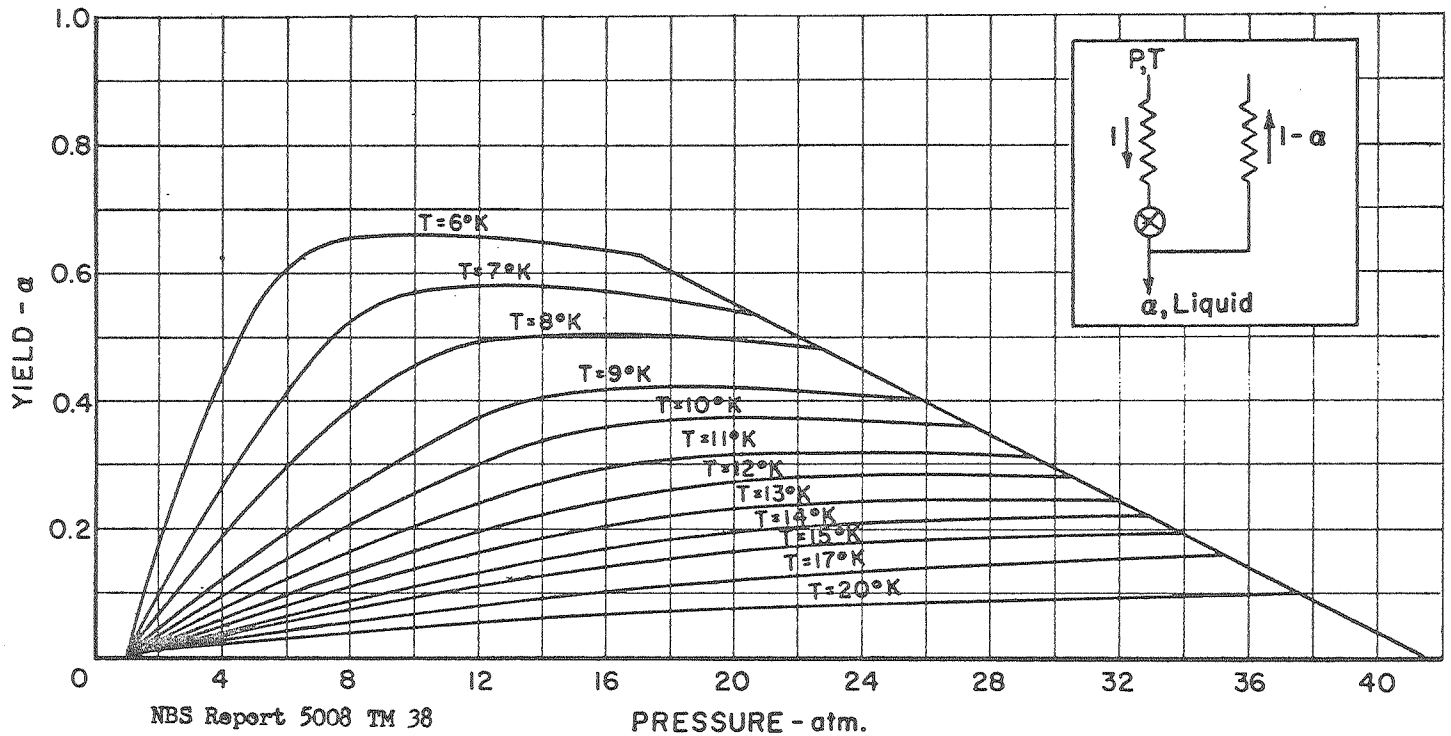

NBS Report 5008 TM 38

Yield α with J-T Heat Exchanger Efficiency η =100 percent
as a Function HP inlet Pressure and Temperature

HELIUM GAS LIQUEFACTION

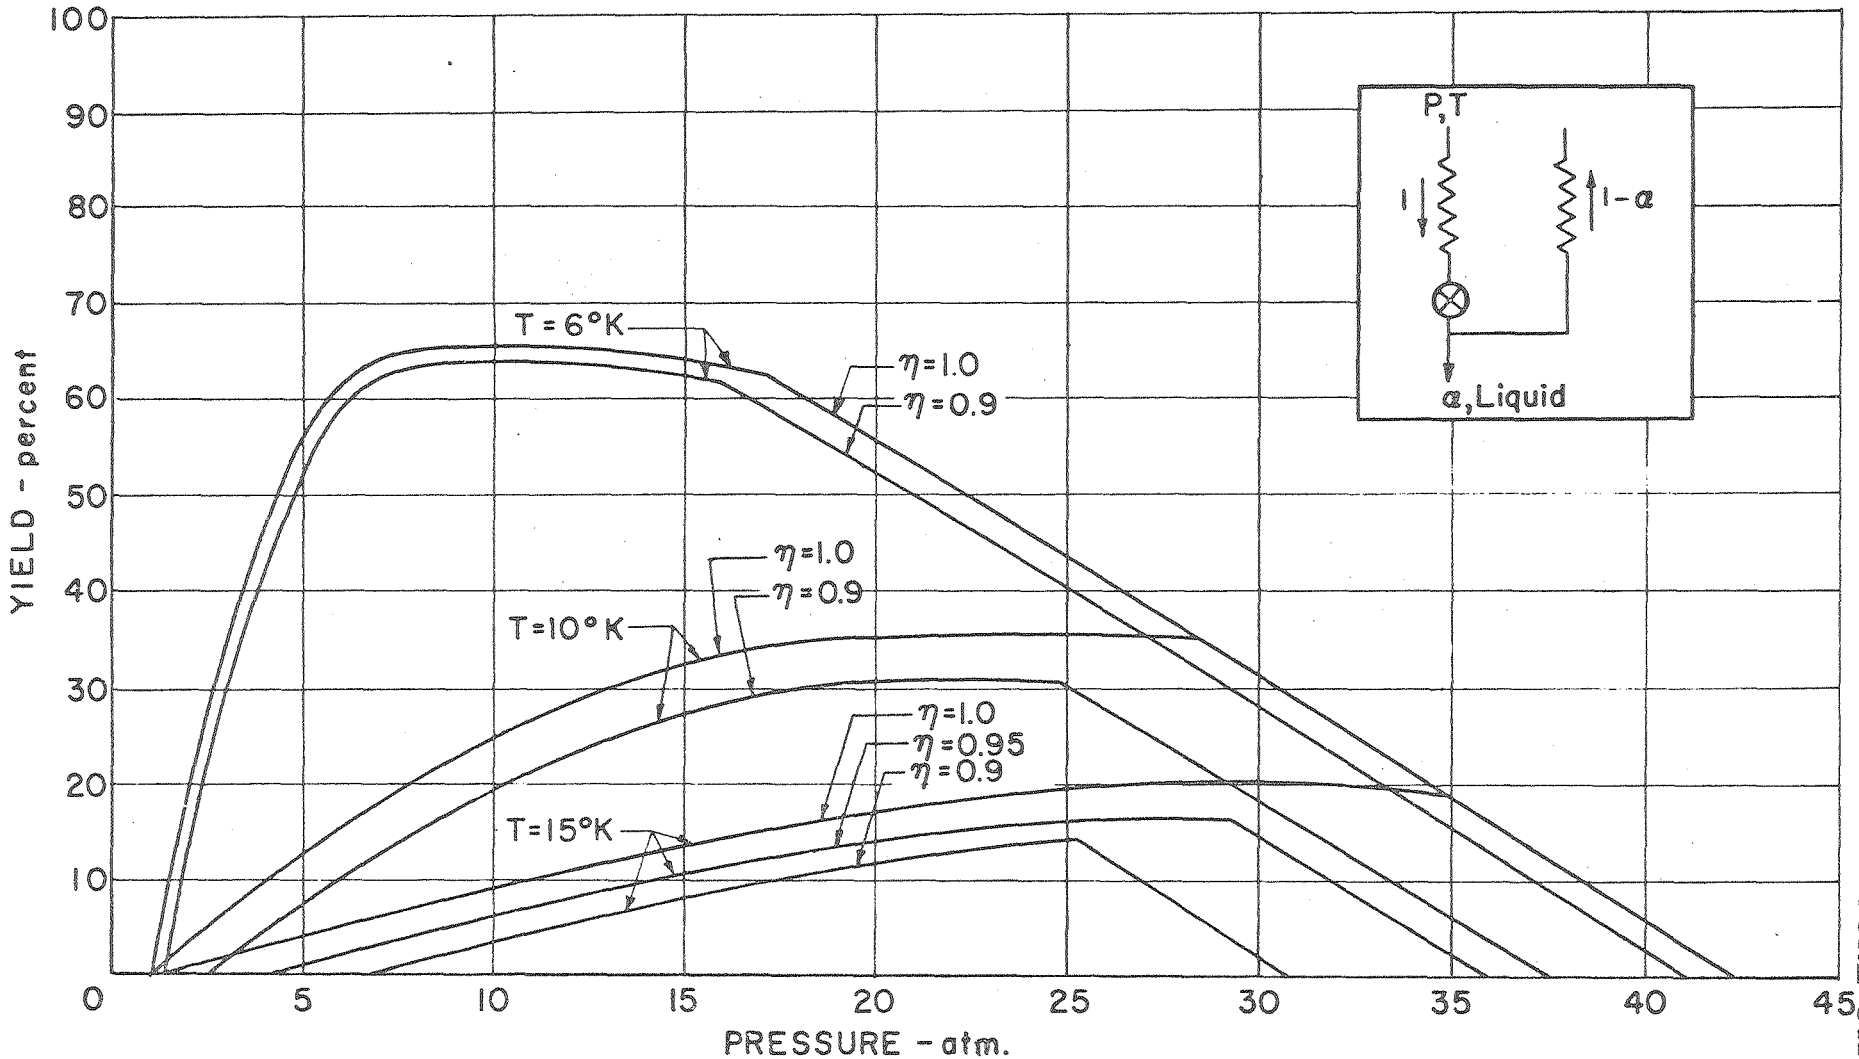

Yield α with J-T Heat Exchanger Efficiencies η = 100 percent and η = 90 percent as a function of HP inlet Temperature and Pressure.

$$\eta = \frac{Q\ \text{Actual}}{Q\ \text{Ideal}}$$

NBS Report 5008 TM 38

HELIUM GAS LIQUEFACTION

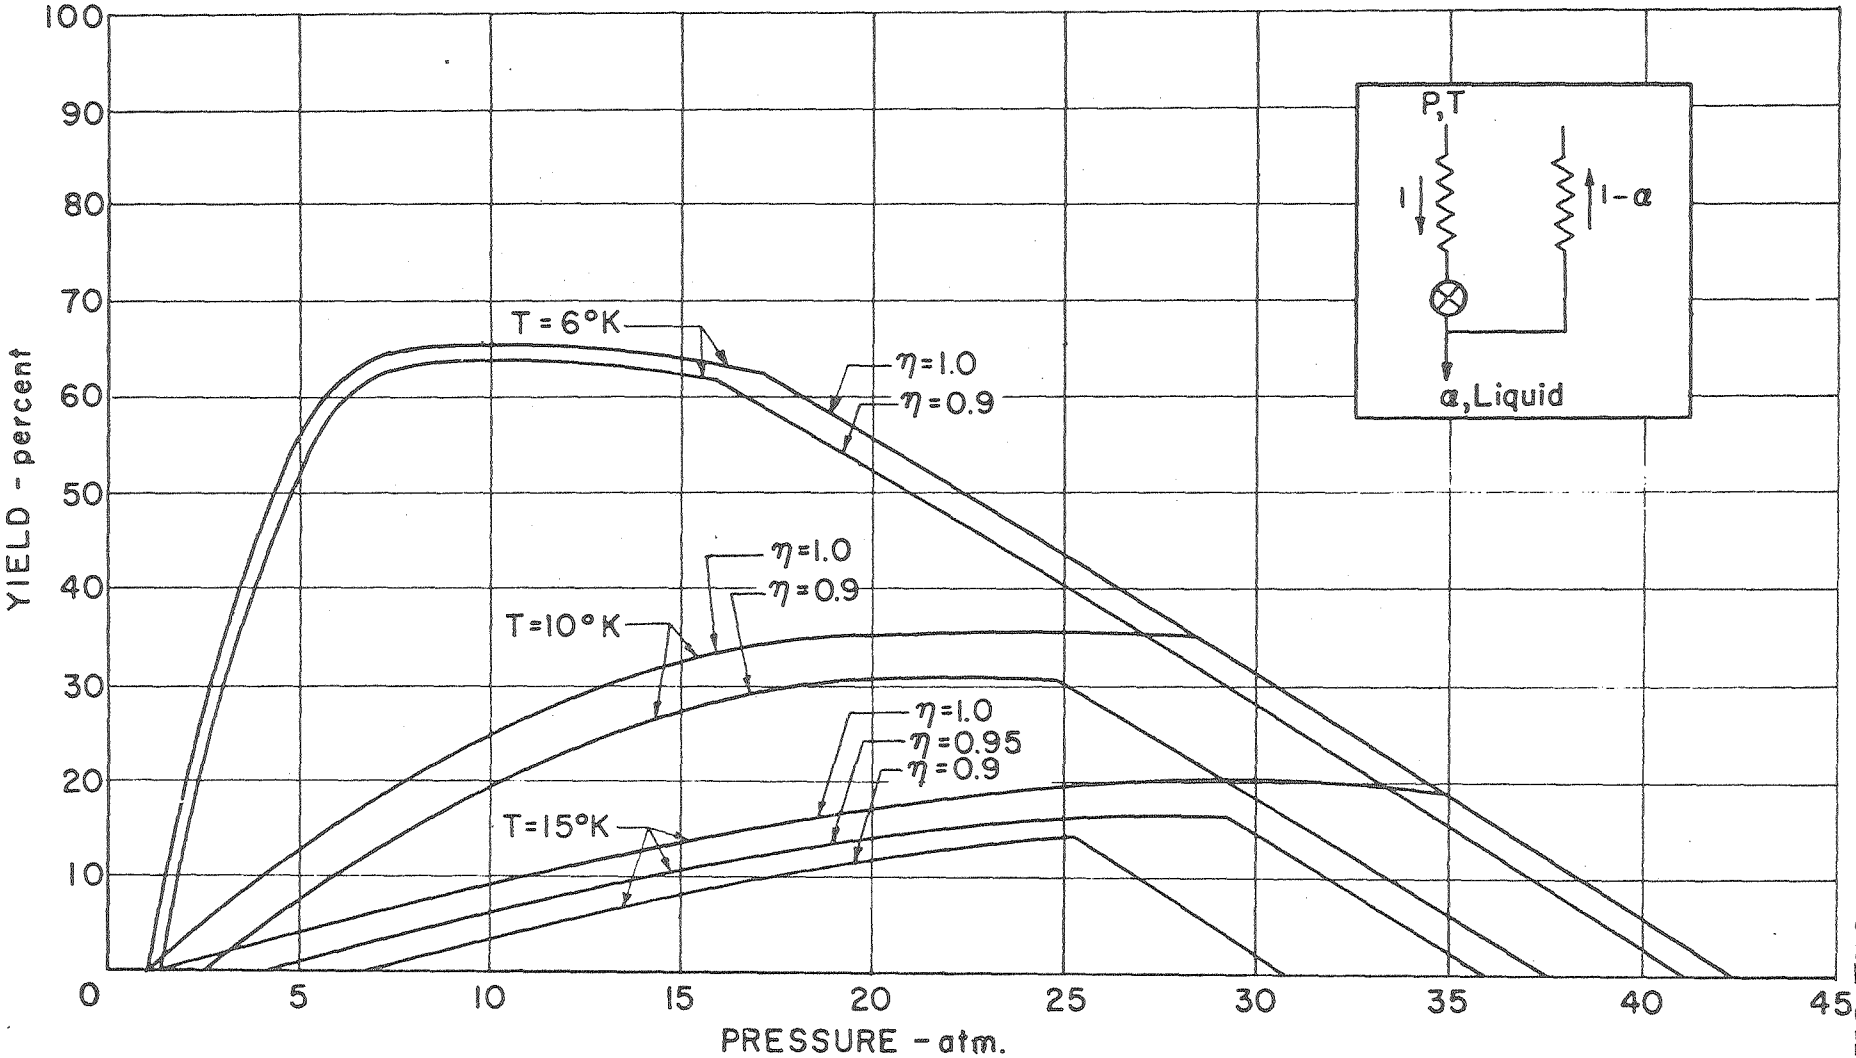

Yield α with J-T Heat Exchanger Efficiencies η = 100 percent and η = 90 percent as a function of HP inlet Temperature and Pressure.

$$\eta = \frac{Q\ \text{Actual}}{Q\ \text{Ideal}}$$

NBS Report 5008 TM 38

Latent Heat of Vaporization of Helium from
W. K. Keeson, Helium

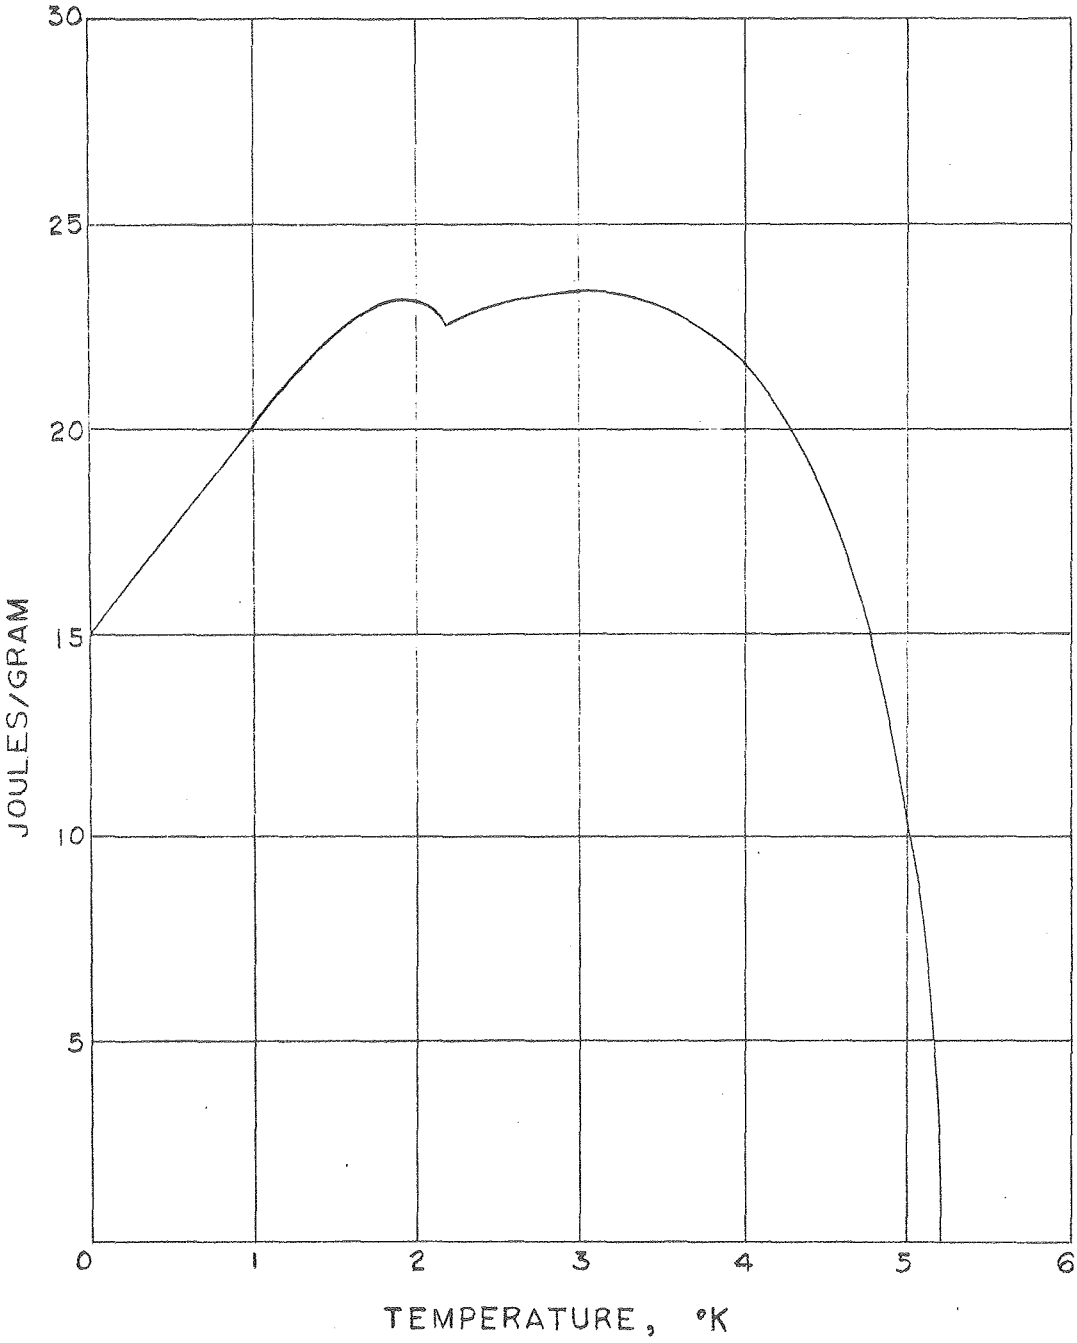

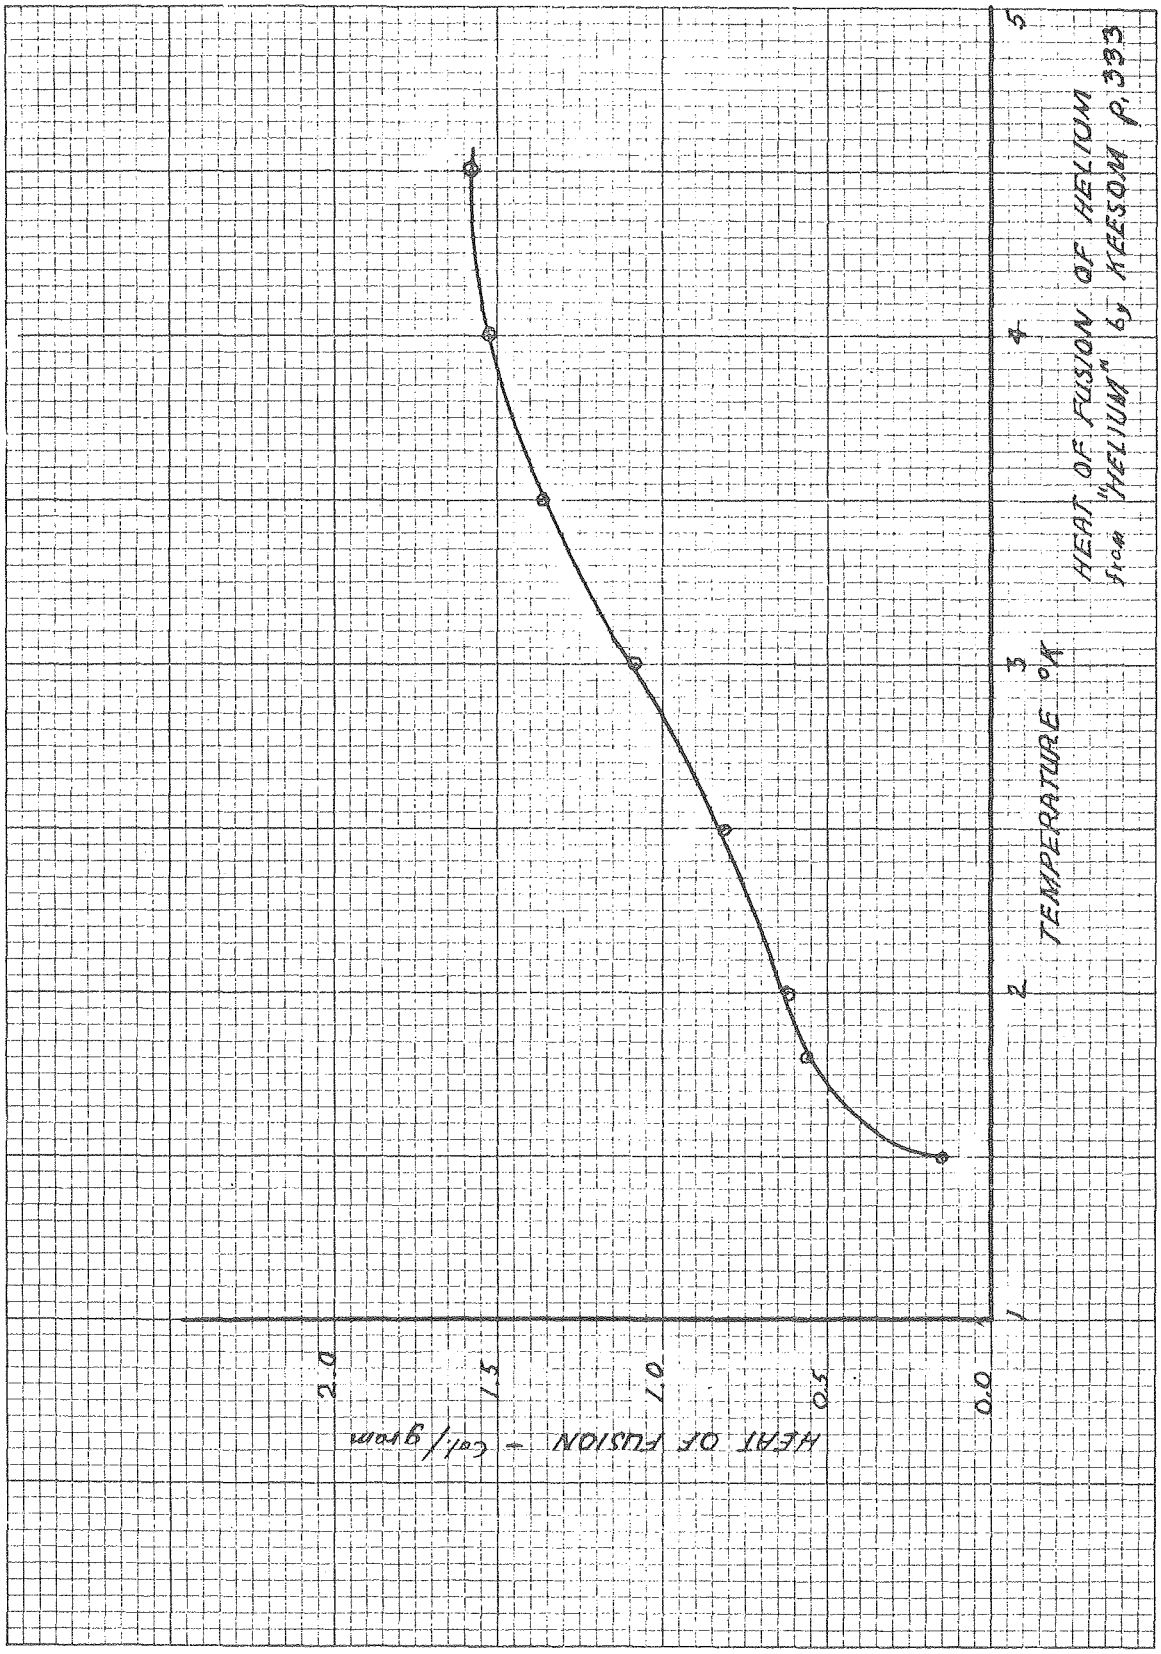
HEAT OF FUSION OF HELIUM
FROM "HELIUM" by KEESOM p. 333
TEMPERATURE °K
HEAT OF FUSION - cal/gram
0.0
0.5
1.0
1.5
2.0
1
2
3
4
5

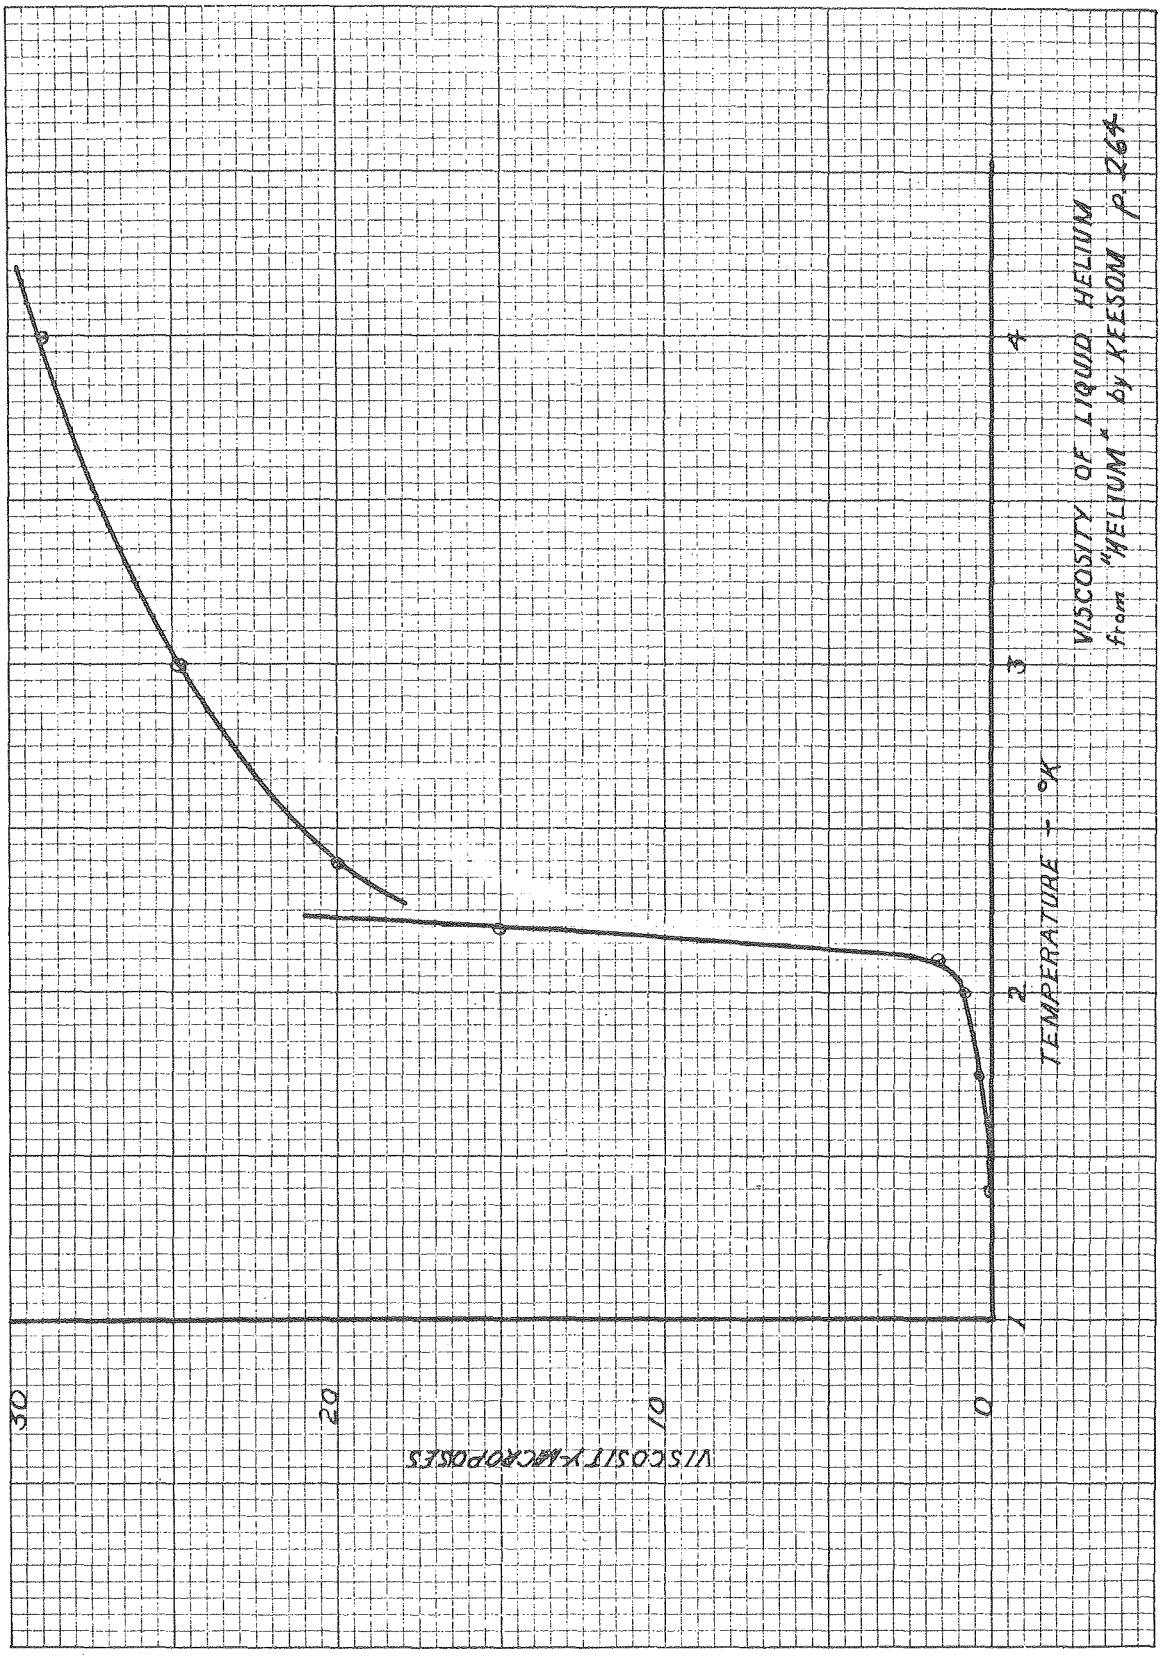
VISCOSITY OF LIQUID HELIUM
from ^{4}HELIUM by KEESOM p. 264
TEMPERATURE - °K
VISCOSITY-MICROPOISES
30
20
10
0
1
2
3
4

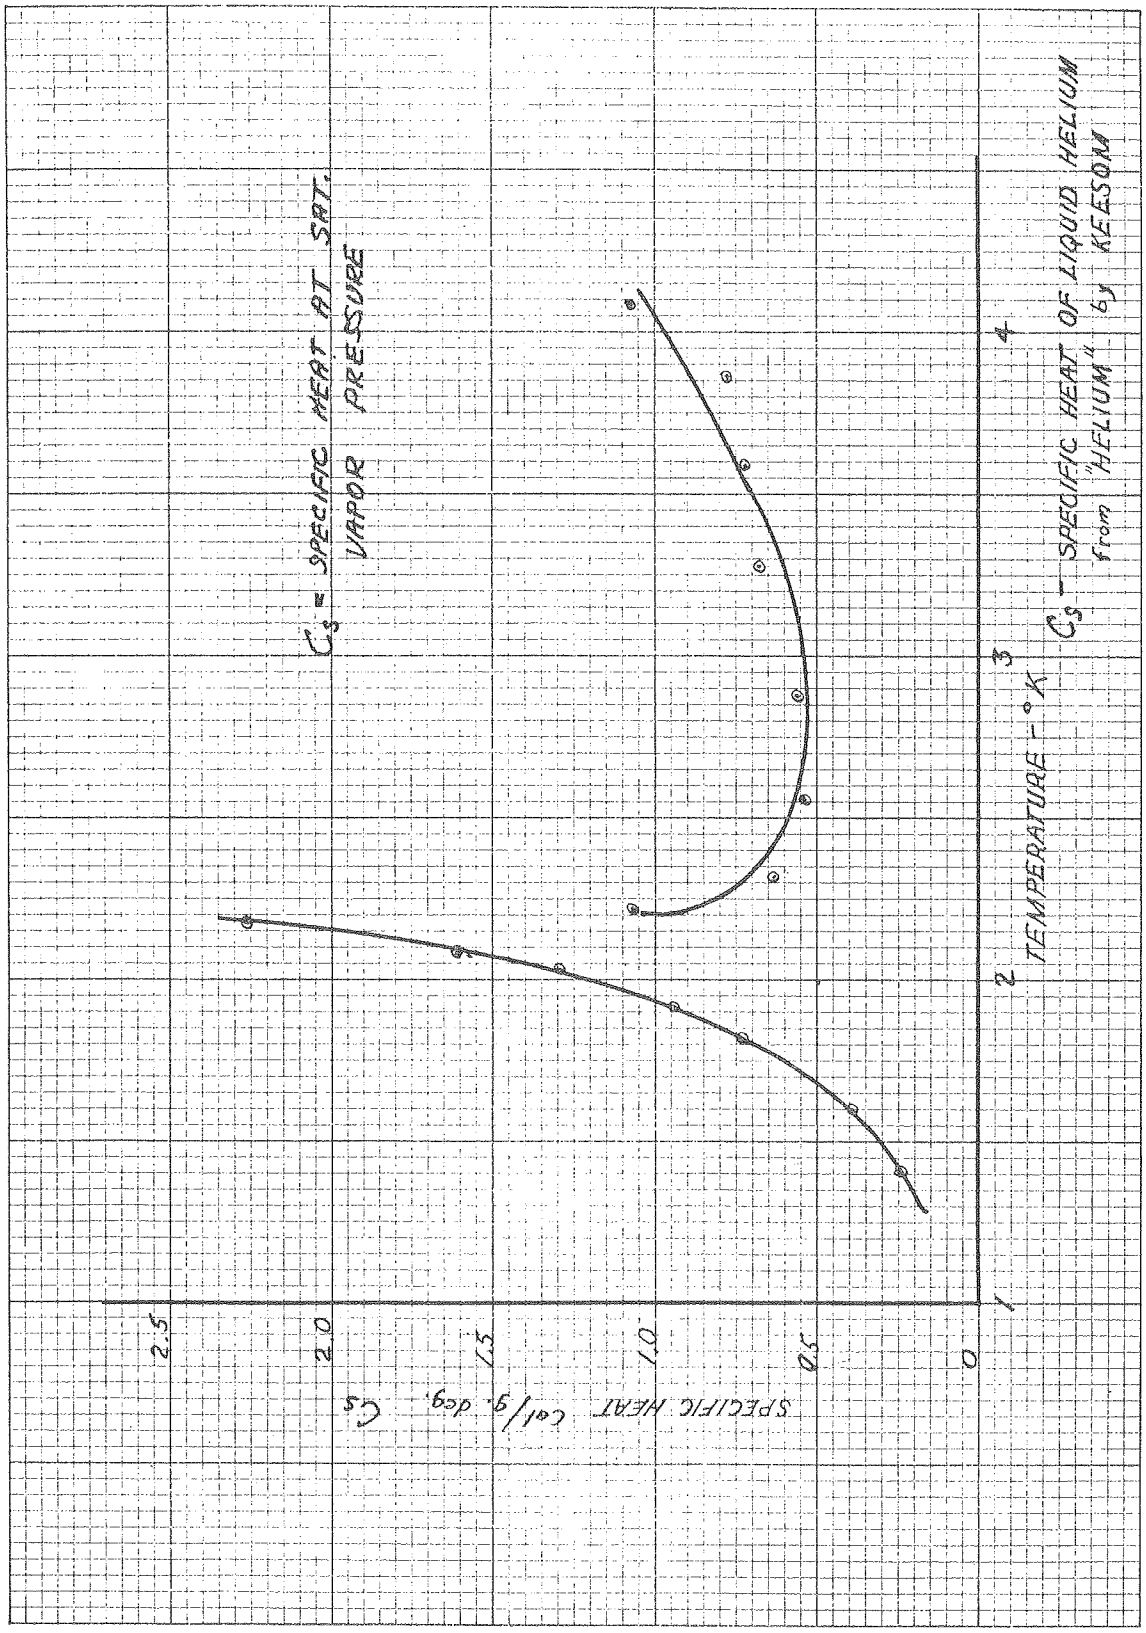
C_s = SPECIFIC HEAT AT SAT. VAPOR PRESSURE
SPECIFIC HEAT cal/g. deg. C_s
2.5
2.0
1.5
1.0
0.5
0
1
2
3
4
TEMPERATURE - °K
C_s - SPECIFIC HEAT OF LIQUID HELIUM from "HELIUM" by KEESOM

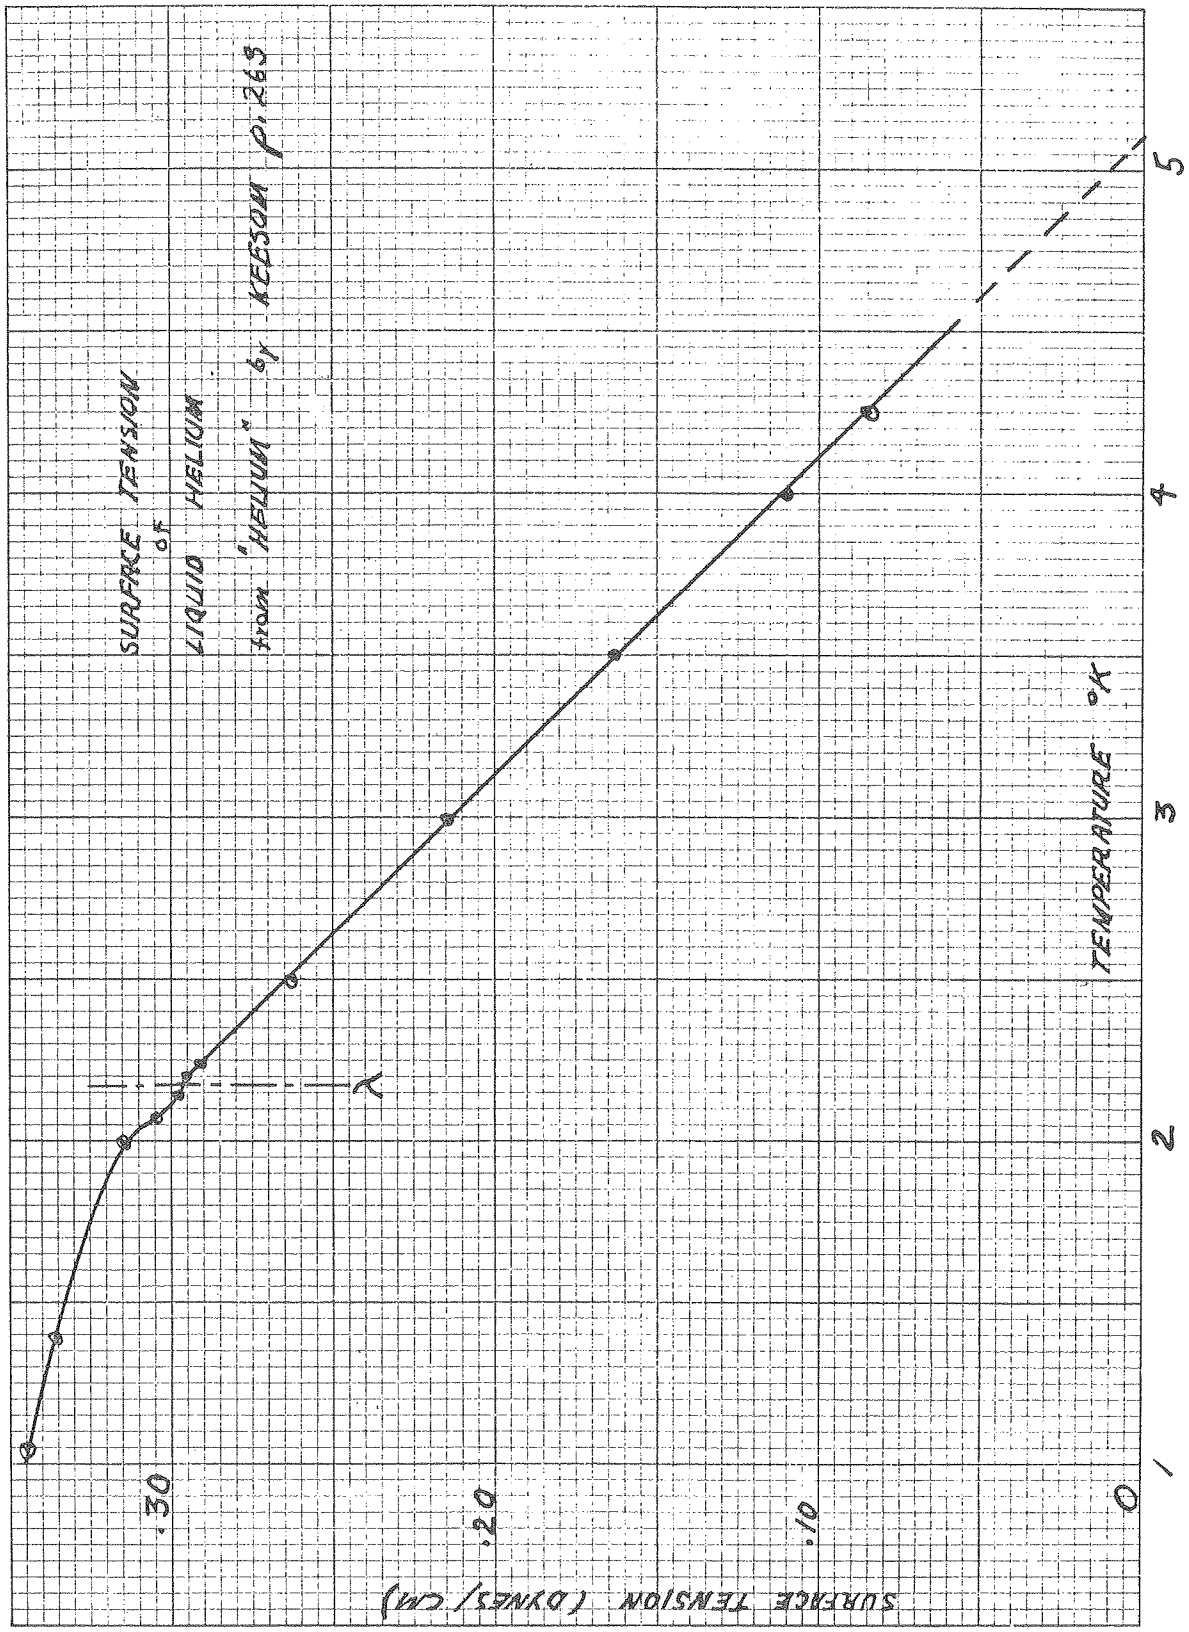
SURFACE TENSION OF LIQUID HELIUM
FROM "HELIUM" by KEESOM p. 263
λ
SURFACE TENSION (DYNES/CM)
.30
.20
.10
0
1
2
3
4
5
TEMPERATURE °K

DENSITY OF LIQUID HELIUM
from "HELIUM" by KEESOM
p 240 TABLE 4.31

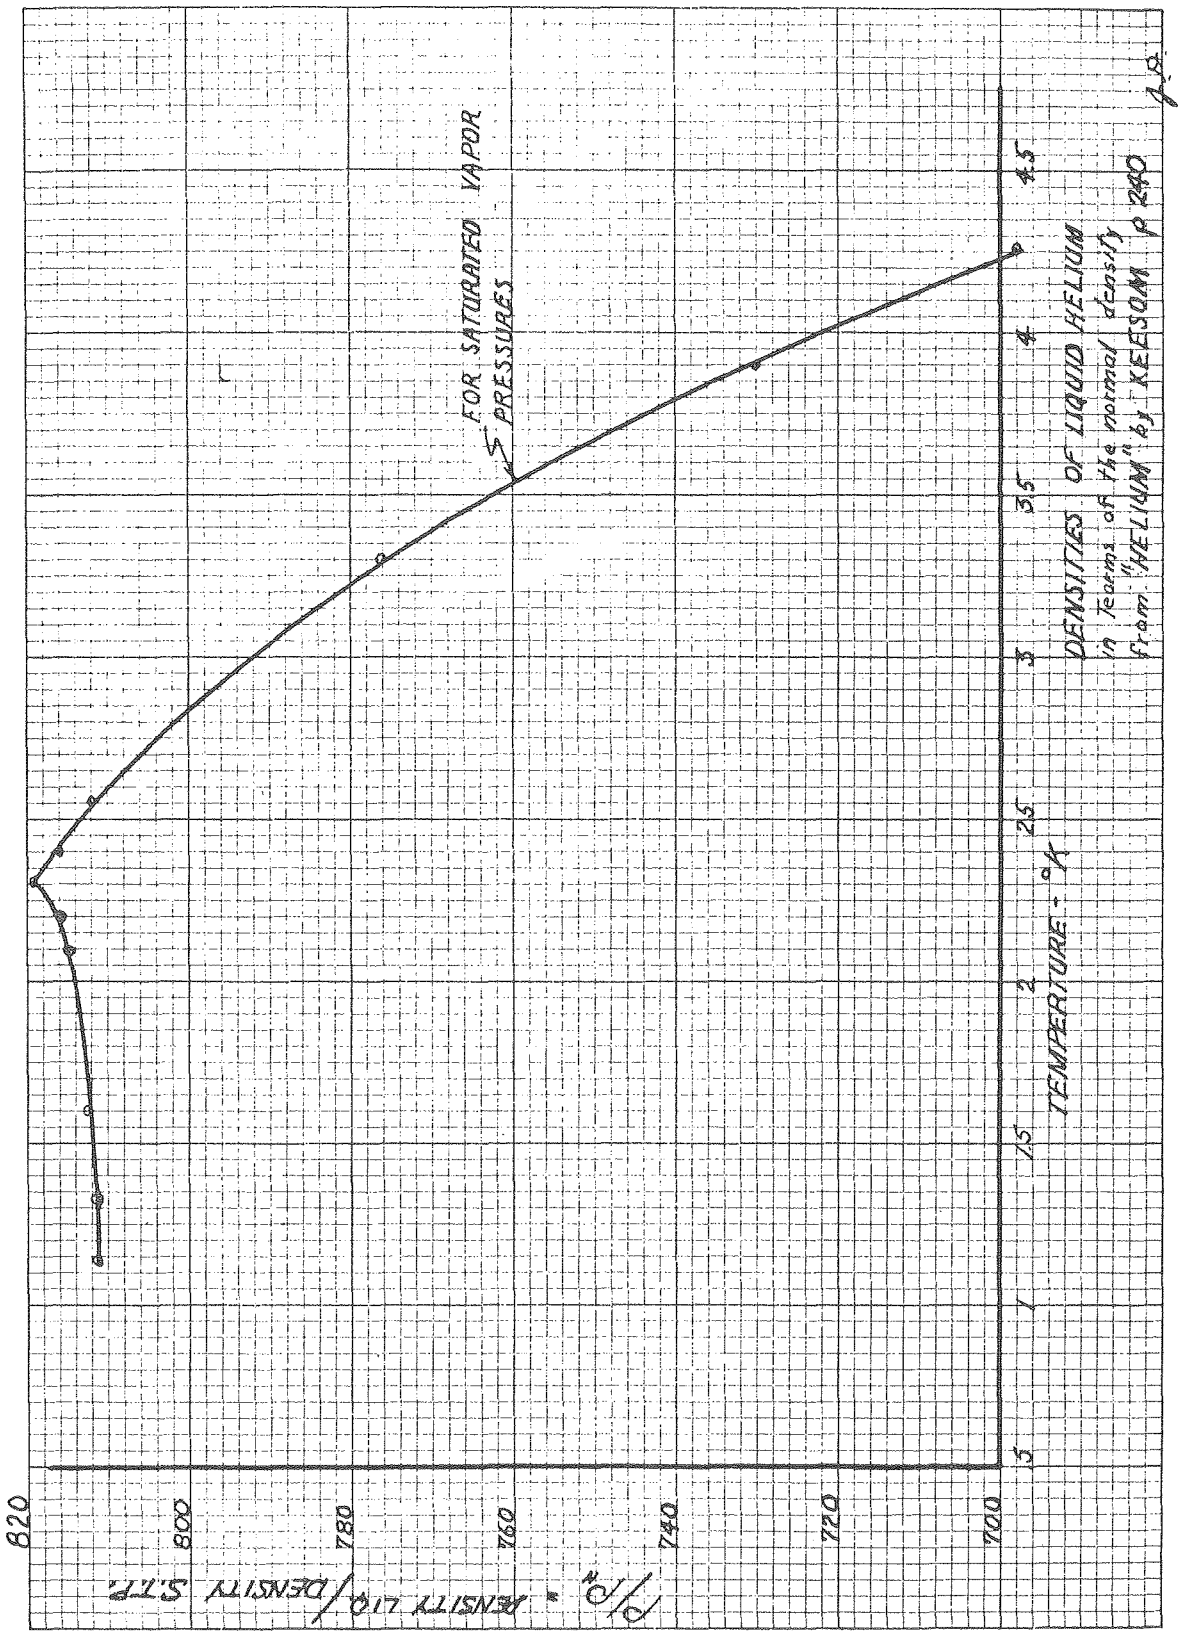
FOR SATURATED VAPOR PRESSURES
DENSITIES OF LIQUID HELIUM
in terms of the normal density
from "HELIUM" by KEESOM p 240
TEMPERATURE - °K
ρ/ρn = DENSITY LIQ/DENSITY STP
820
800
780
760
740
720
700
.5
1
1.5
2
2.5
3
3.5
4
4.5

Fig. 8

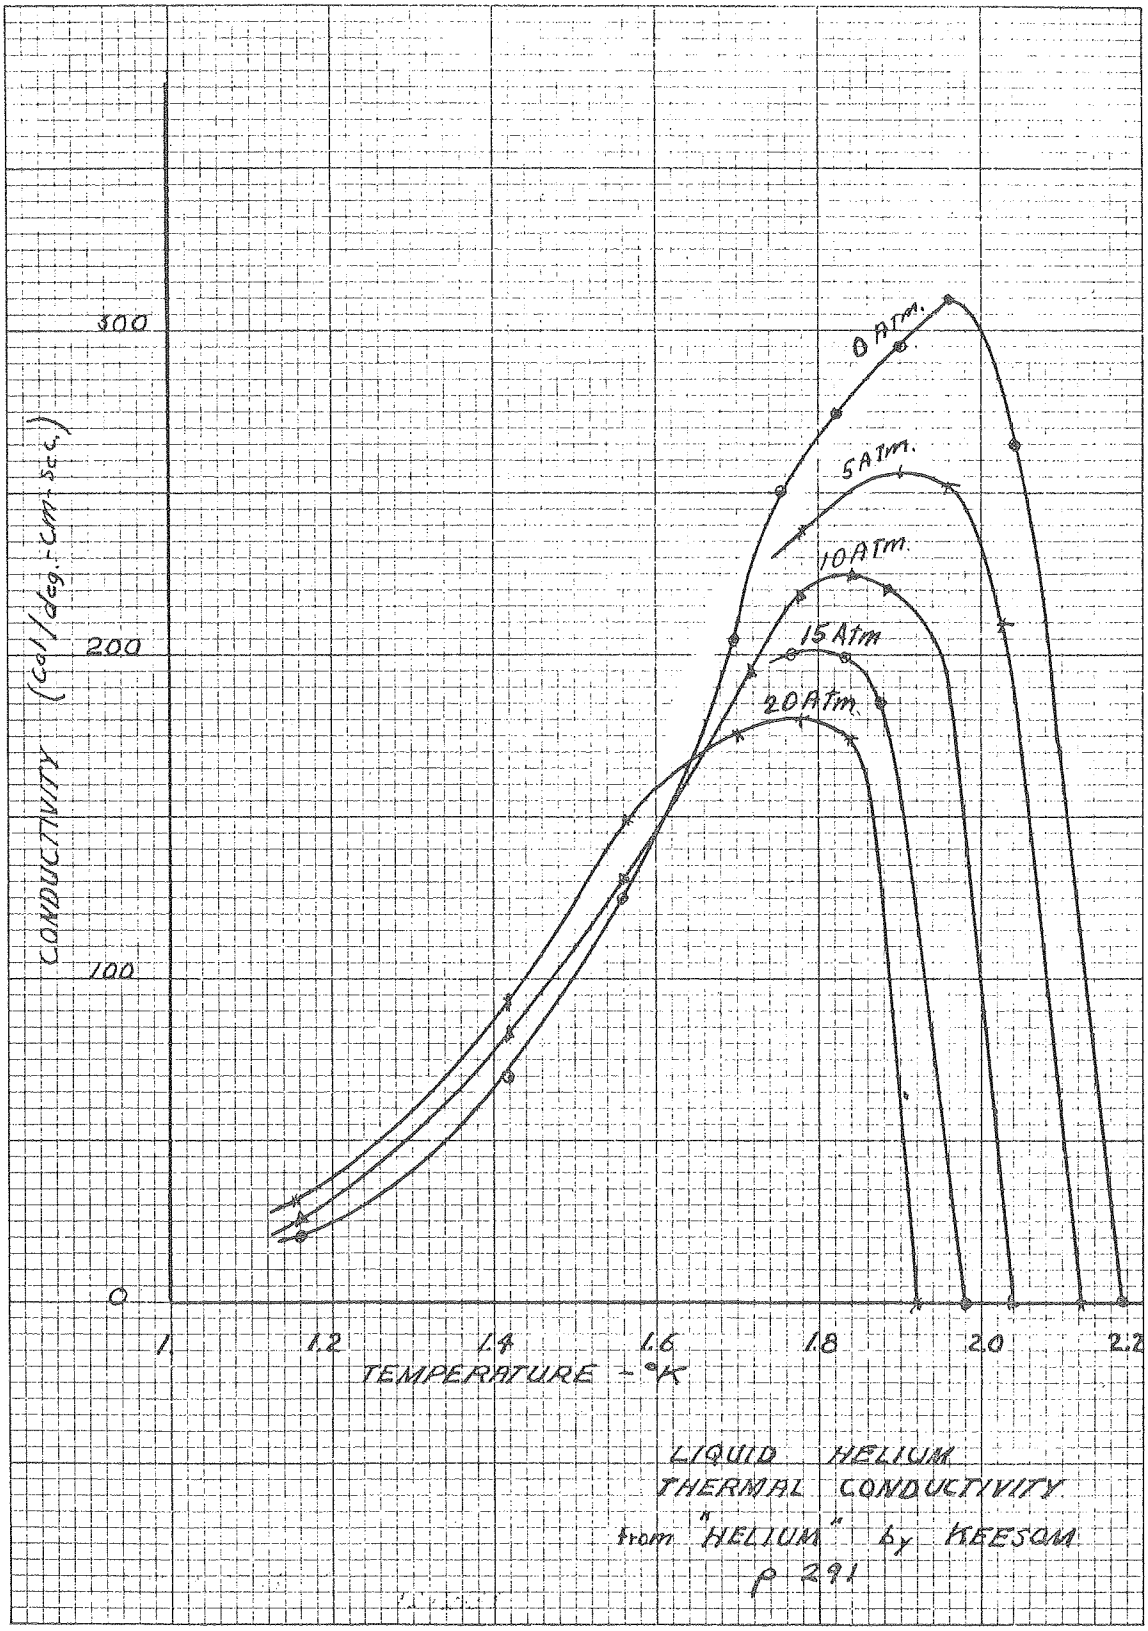

LIQUID HELIUM
THERMAL CONDUCTIVITY
from "HELIUM" by KEESOM
p 291

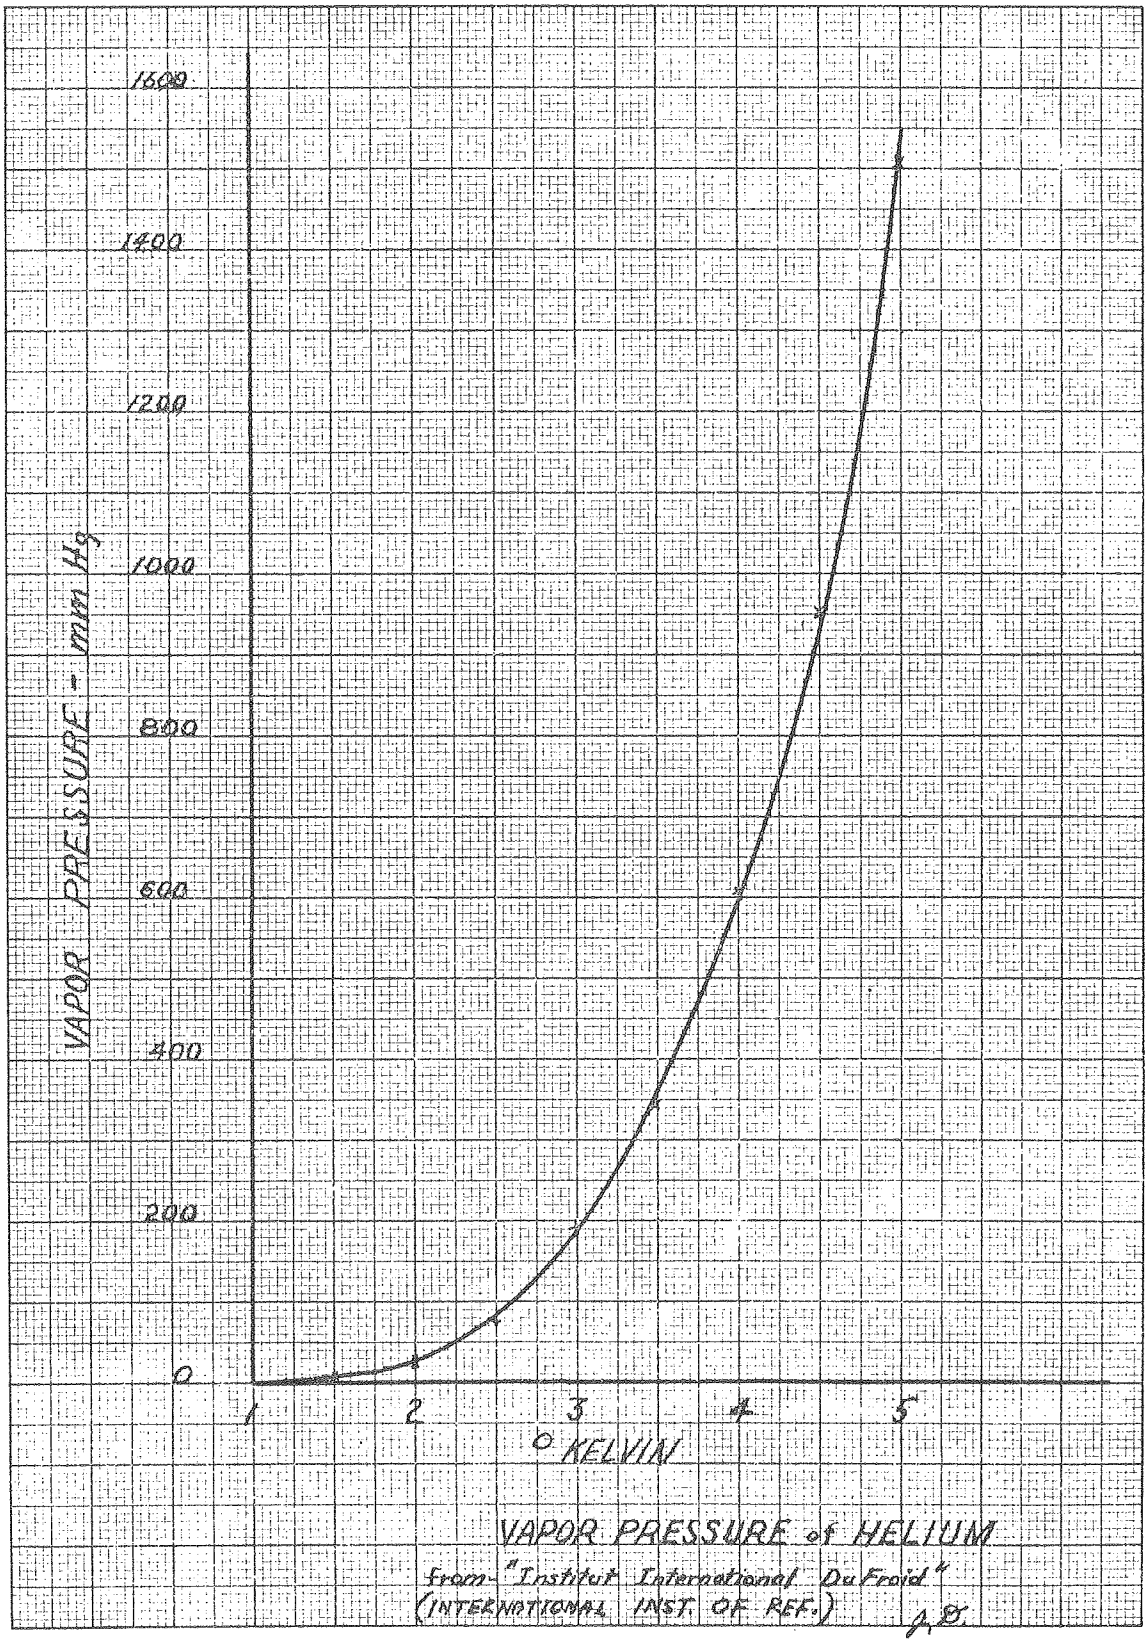

VAPOR PRESSURE of HELIUM

from "Institut International Du Froid"
(INTERNATIONAL INST. OF REF.)

HEAT TRANSFER TO BOILING AND CONDENSING HYDROGEN

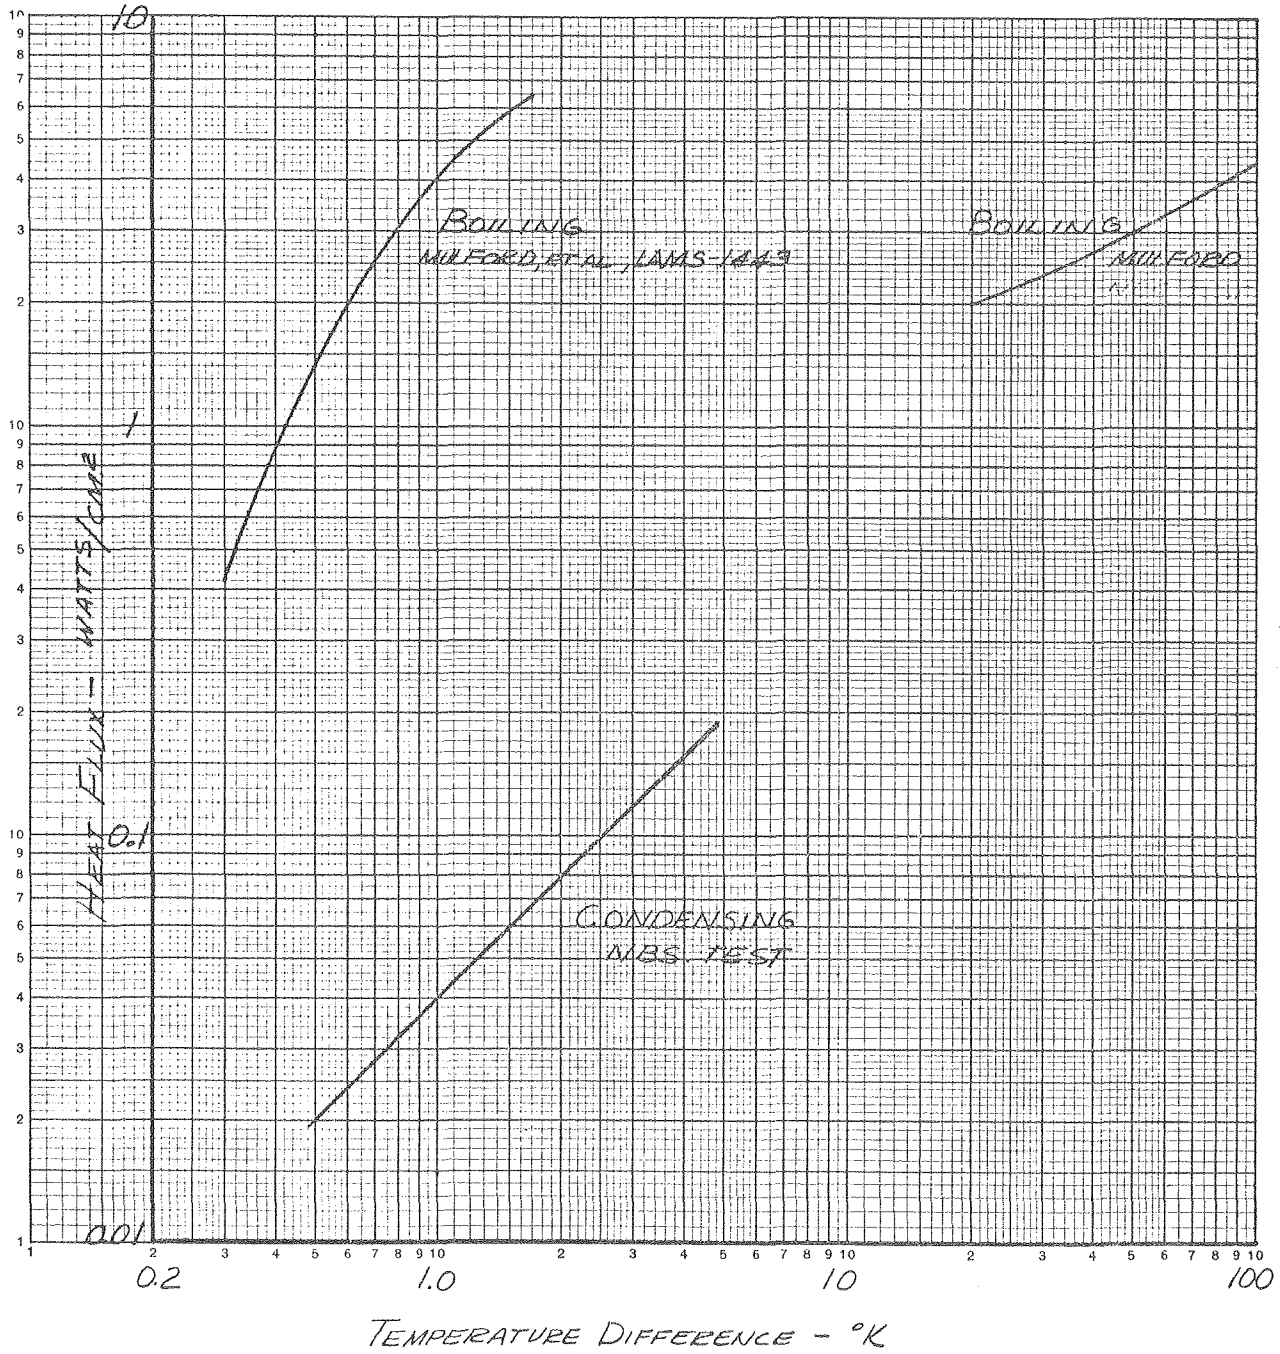

HEAT TRANSFER TO BOILING AND CONDENSING NITROGEN

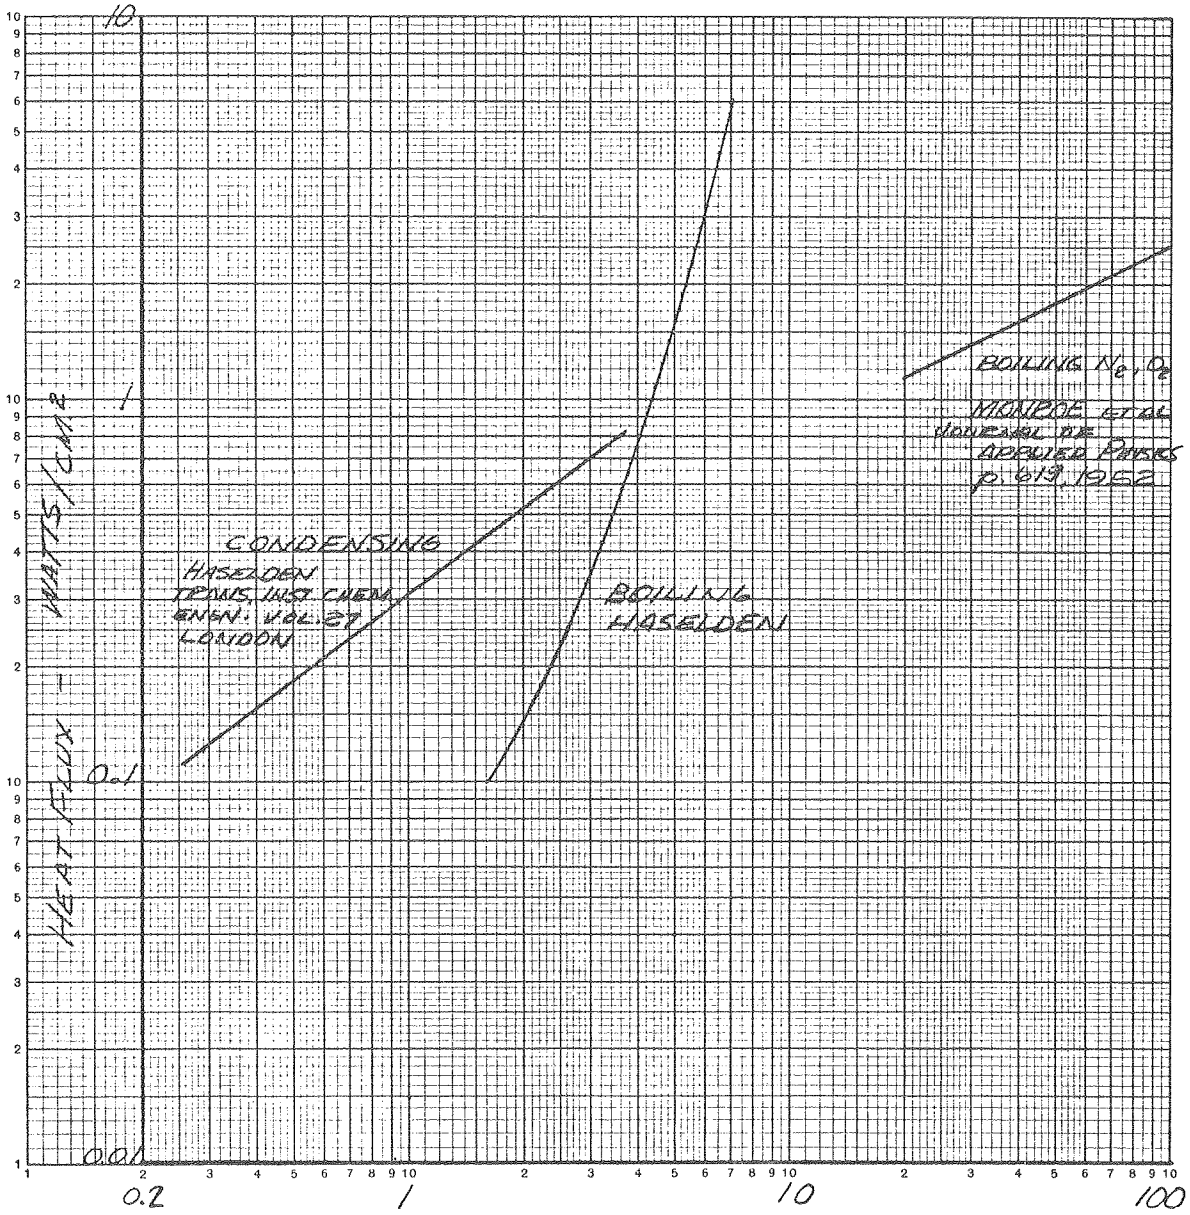

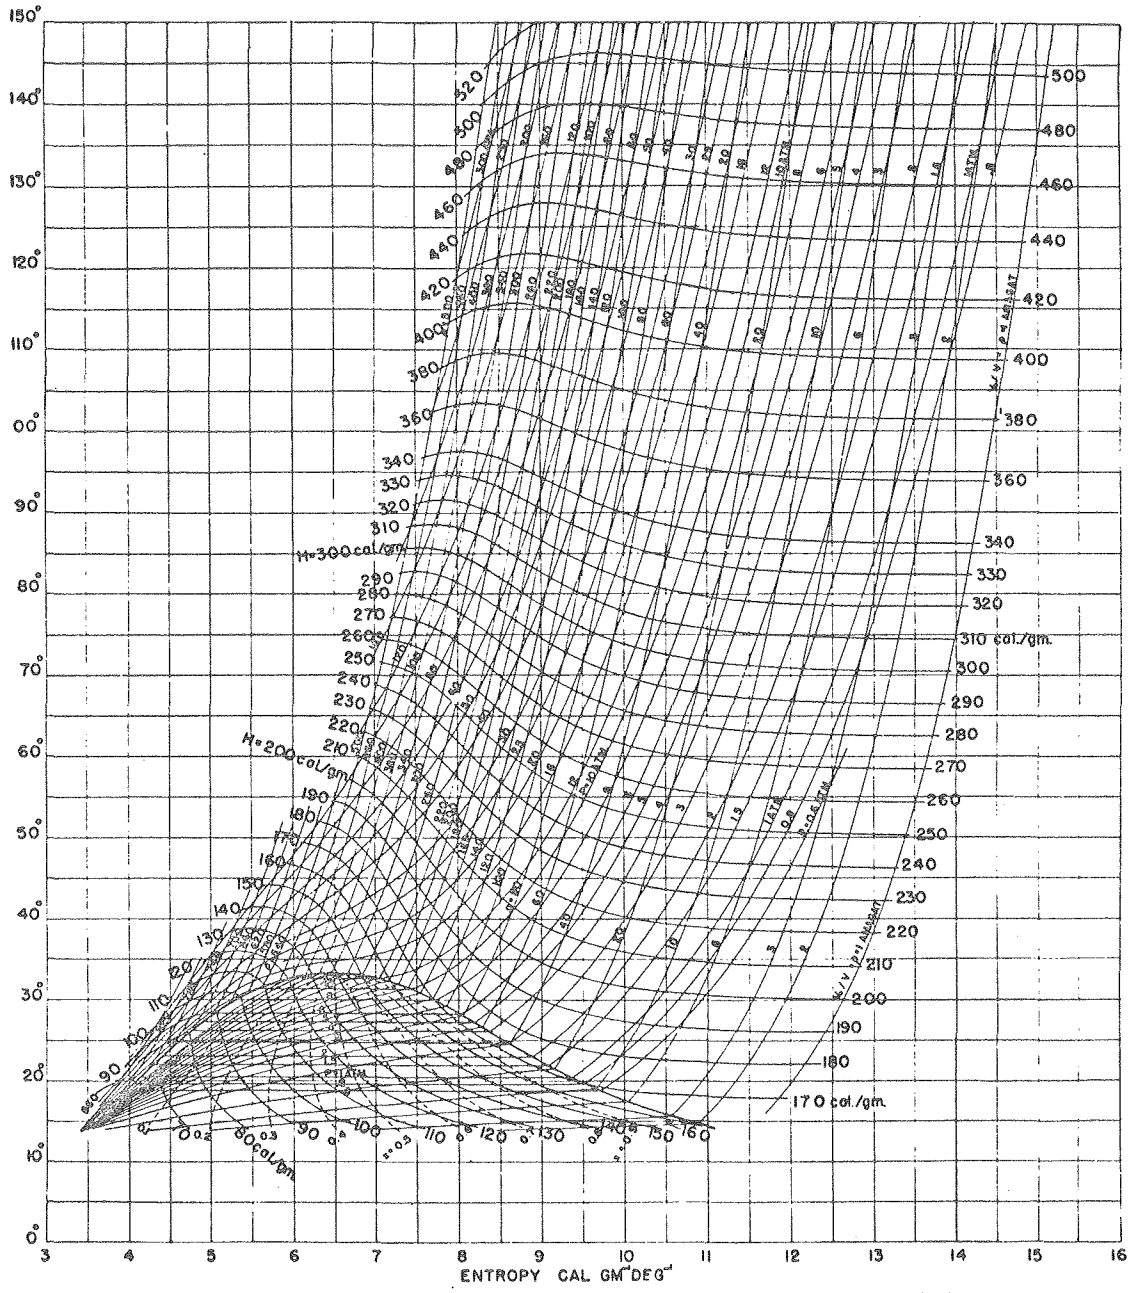

Temperature-entropy diagram for H_2 in the region 0° to 160° K.

REF: NBS RP1932

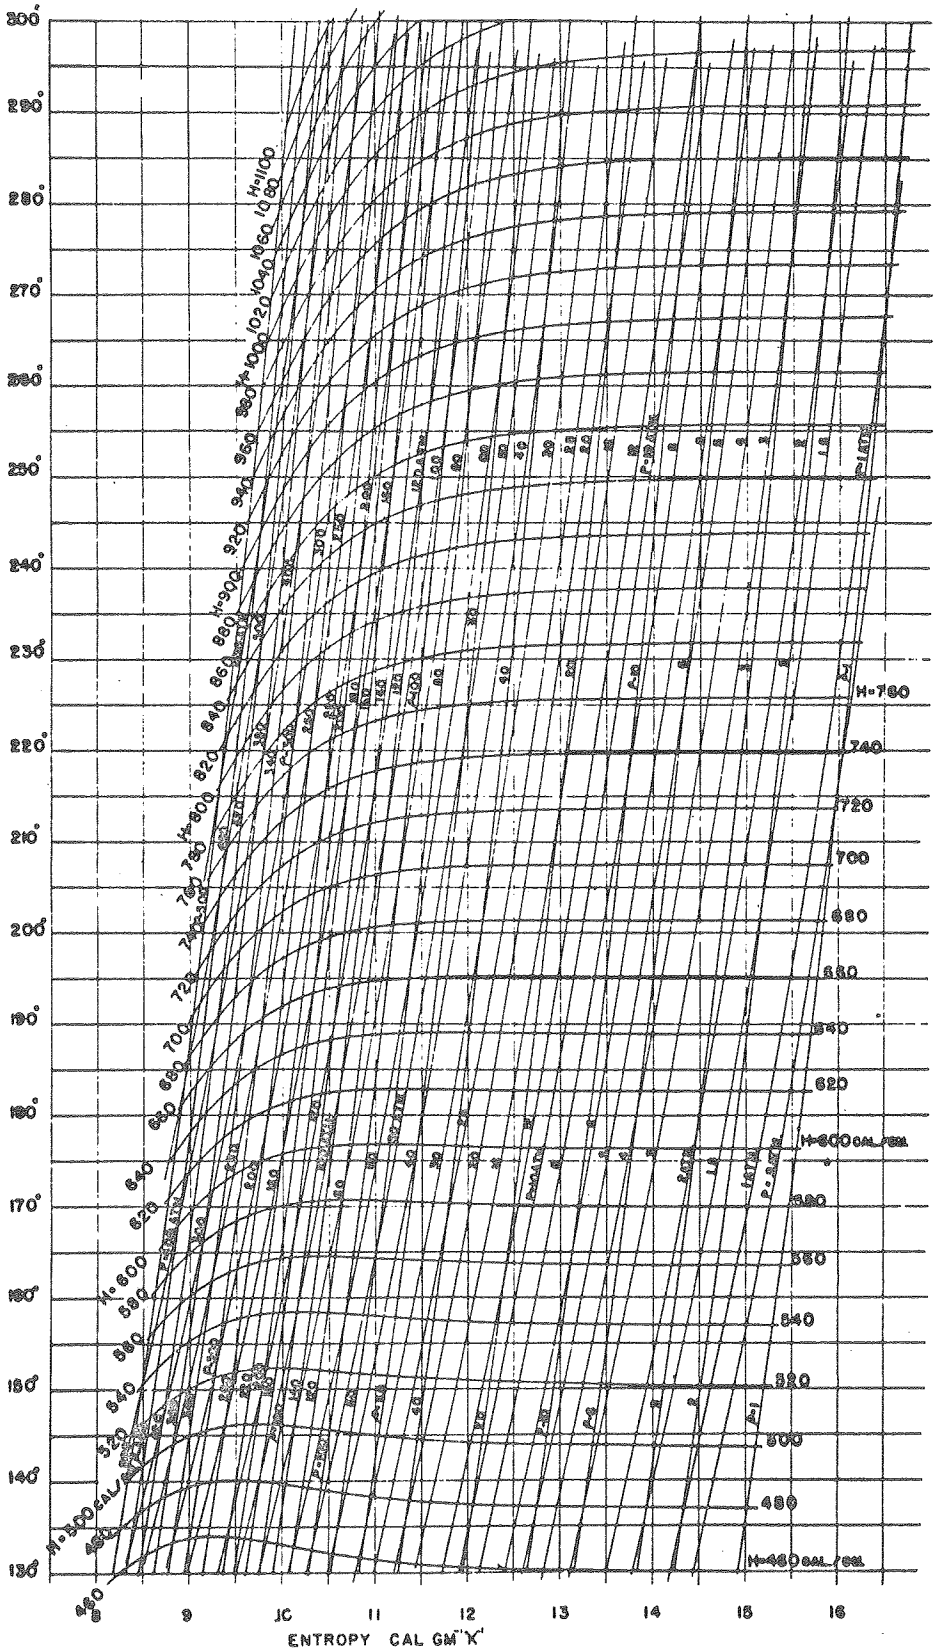

Temperature-entropy diagram for H_2 in the region 130° to 300° K.

REF: NBS RP1932

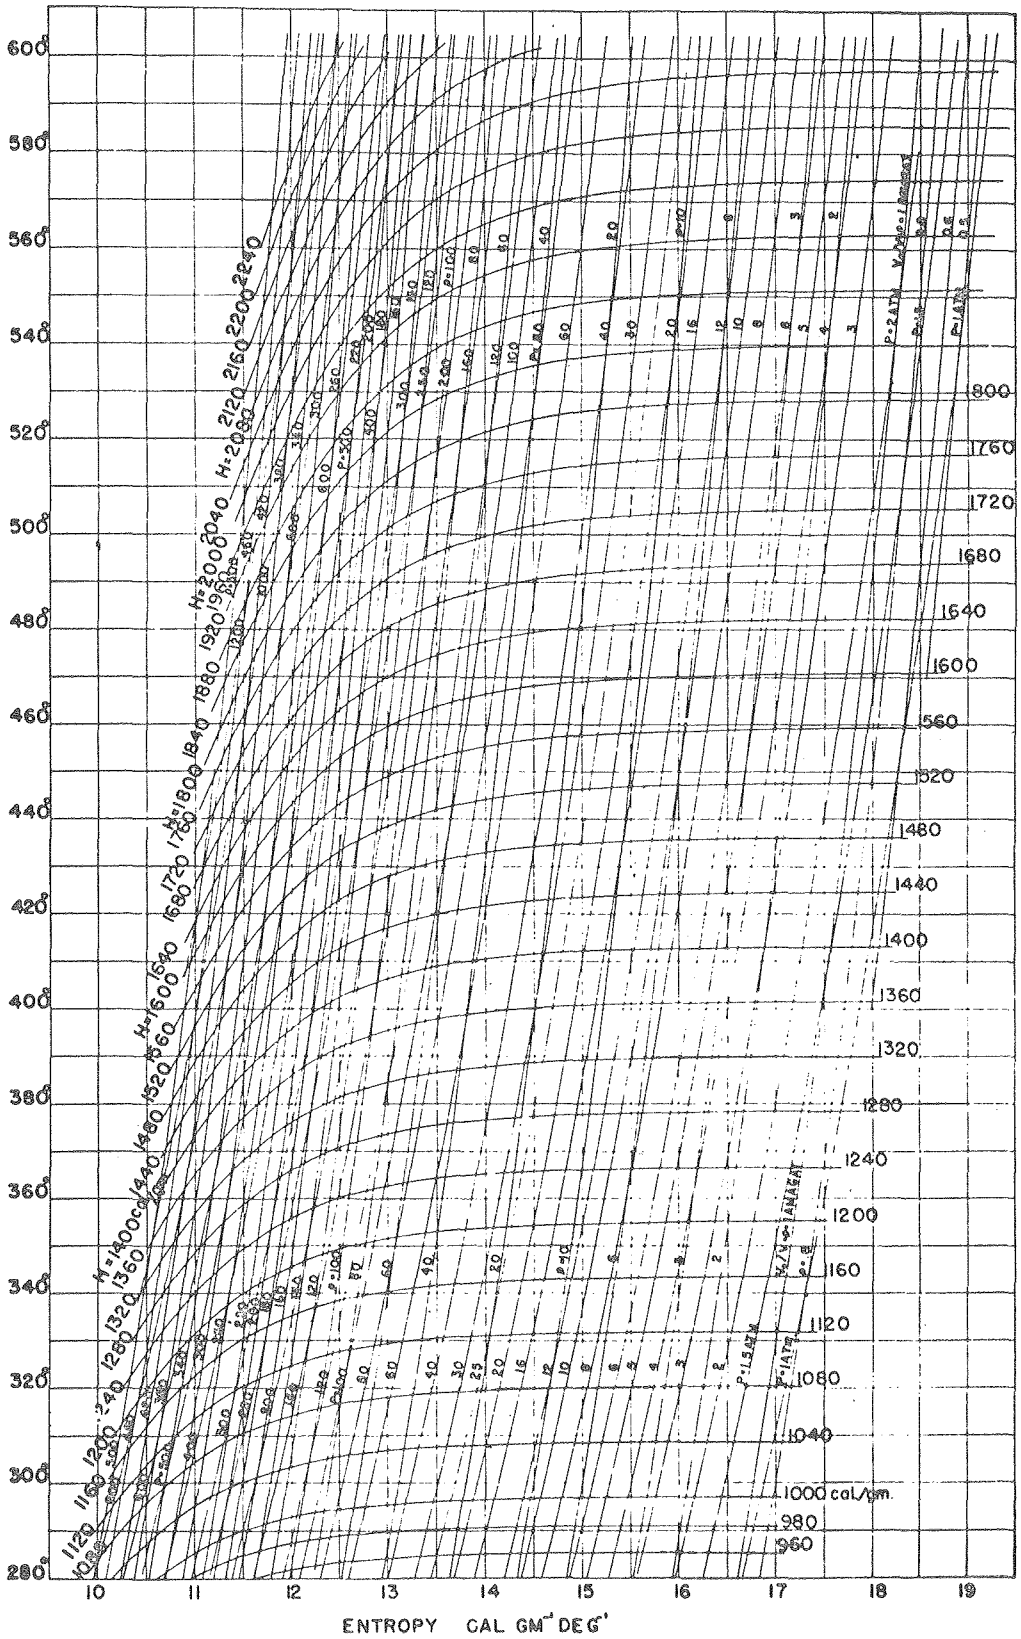

Temperature-entropy diagram for H_2 in the region 280° to 600° K.

REF: NBS RP1932

ENTHALPY - HYDROGEN

1 ATM PRESSURE

NBS CIRCULAR 564

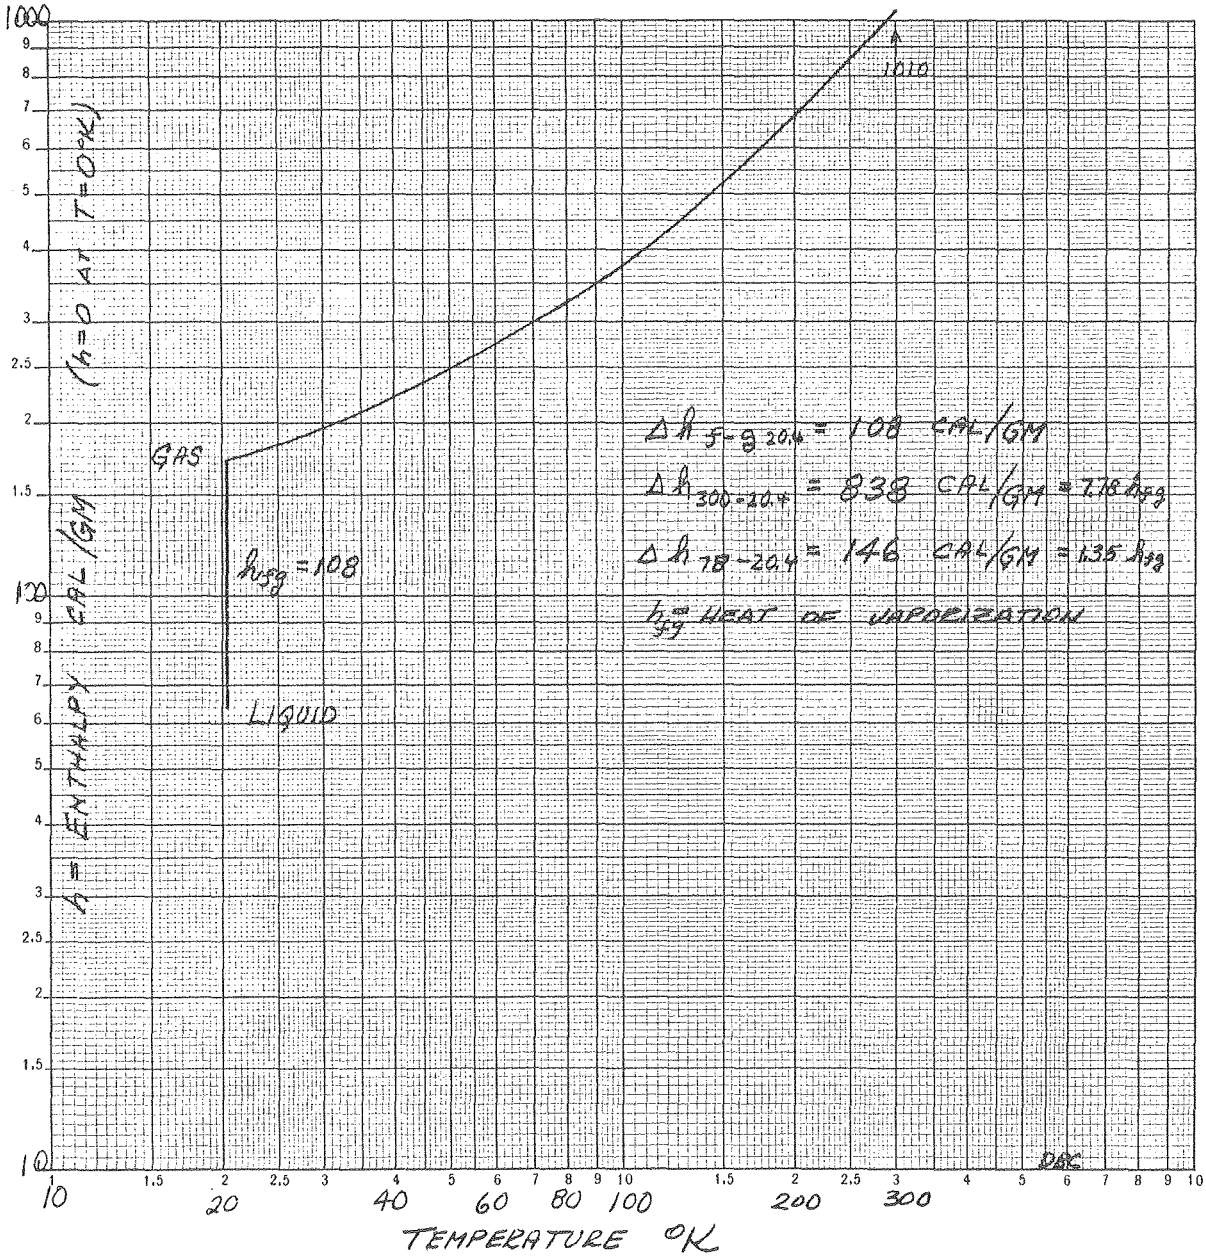

SOUND VELOCITY - HYDROGEN
NBS CIRCULAR 564
100 ATM
1 ATM
LIQUID 20.46 °K
1127
VELOCITY METERS/SEC
1400
1200
1000
800
600
400
200
0
0
50
100
150
200
250
300
TEMPERATURE °K

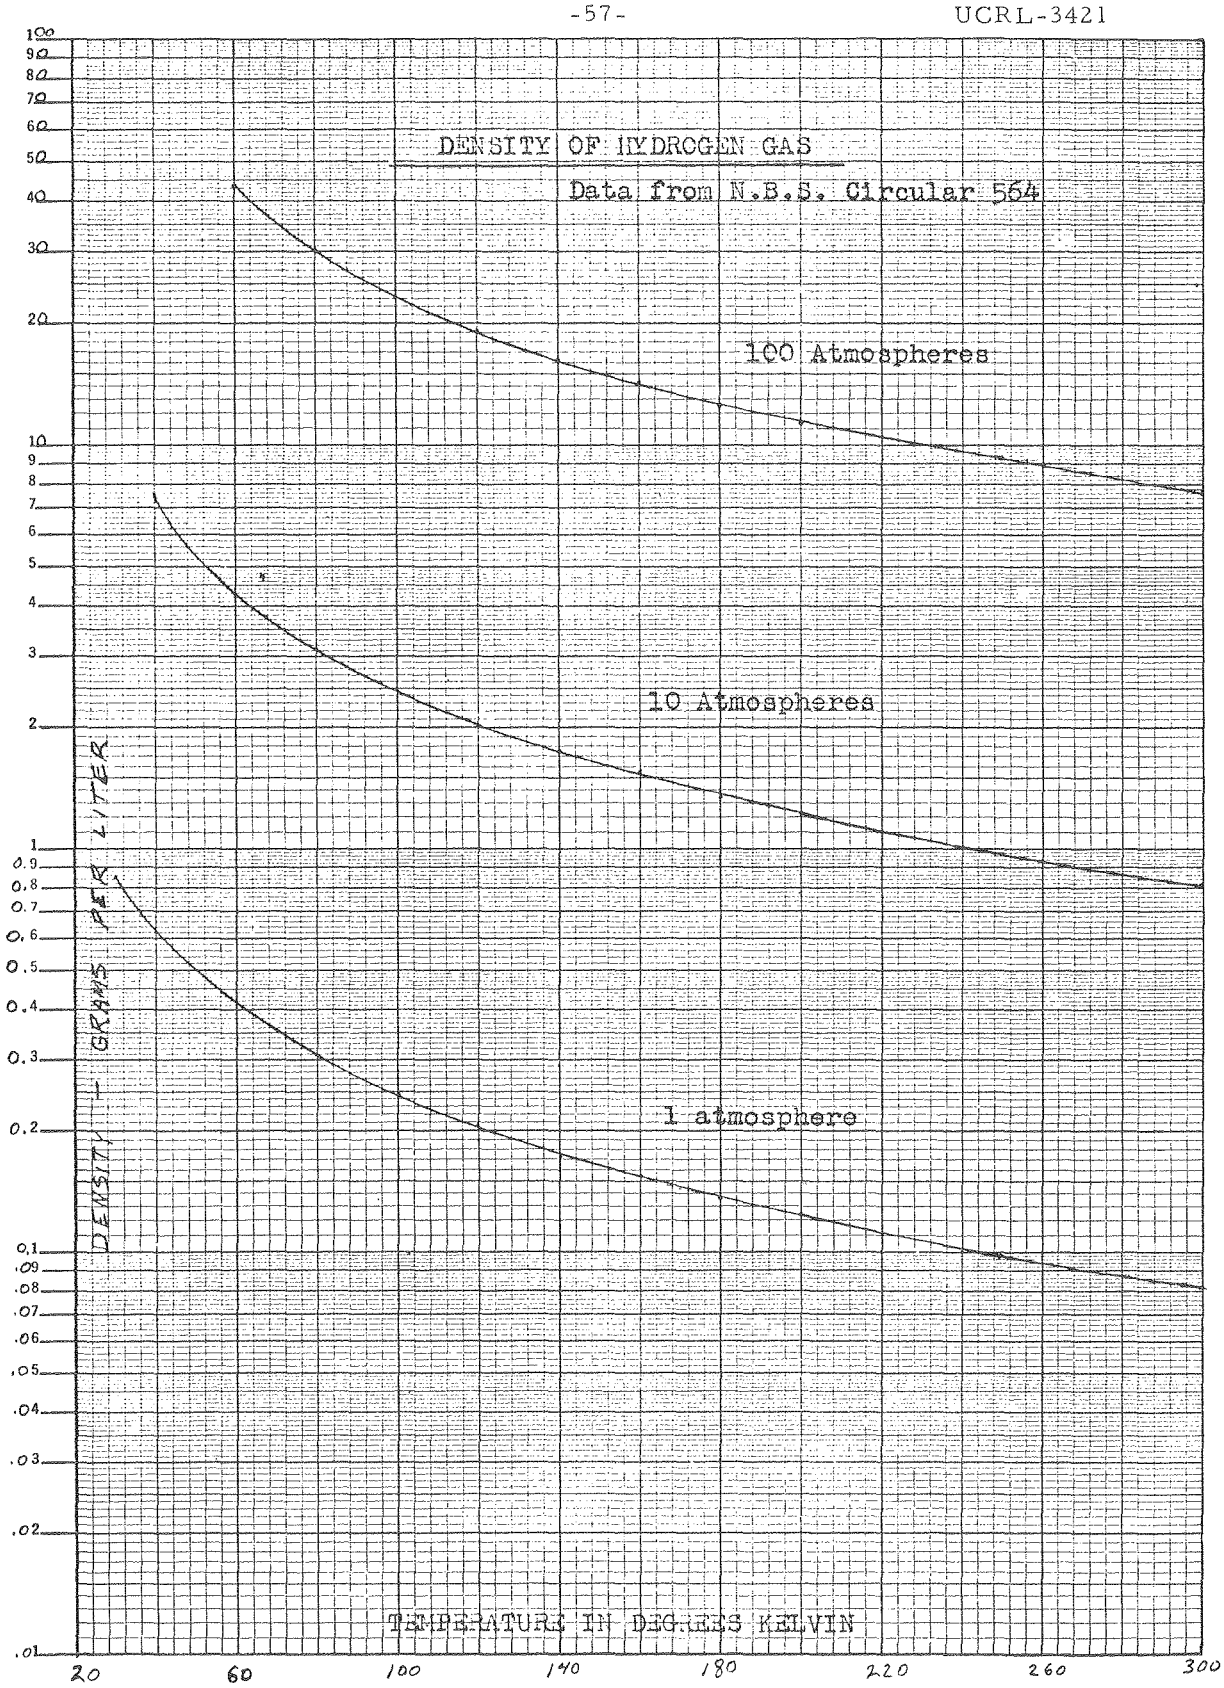
DENSITY OF HYDROGEN GAS
Data from N.B.S. Circular 564
100 Atmospheres
10 Atmospheres
1 atmosphere
DENSITY - GRAMS PER LITER
TEMPERATURE IN DEGREES KELVIN
100
90
80
70
60
50
40
30
20
10
9
8
7
6
5
4
3
2
1
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
.09
.08
.07
.06
.05
.04
.03
.02
.01
20
60
100
140
180
220
260
300

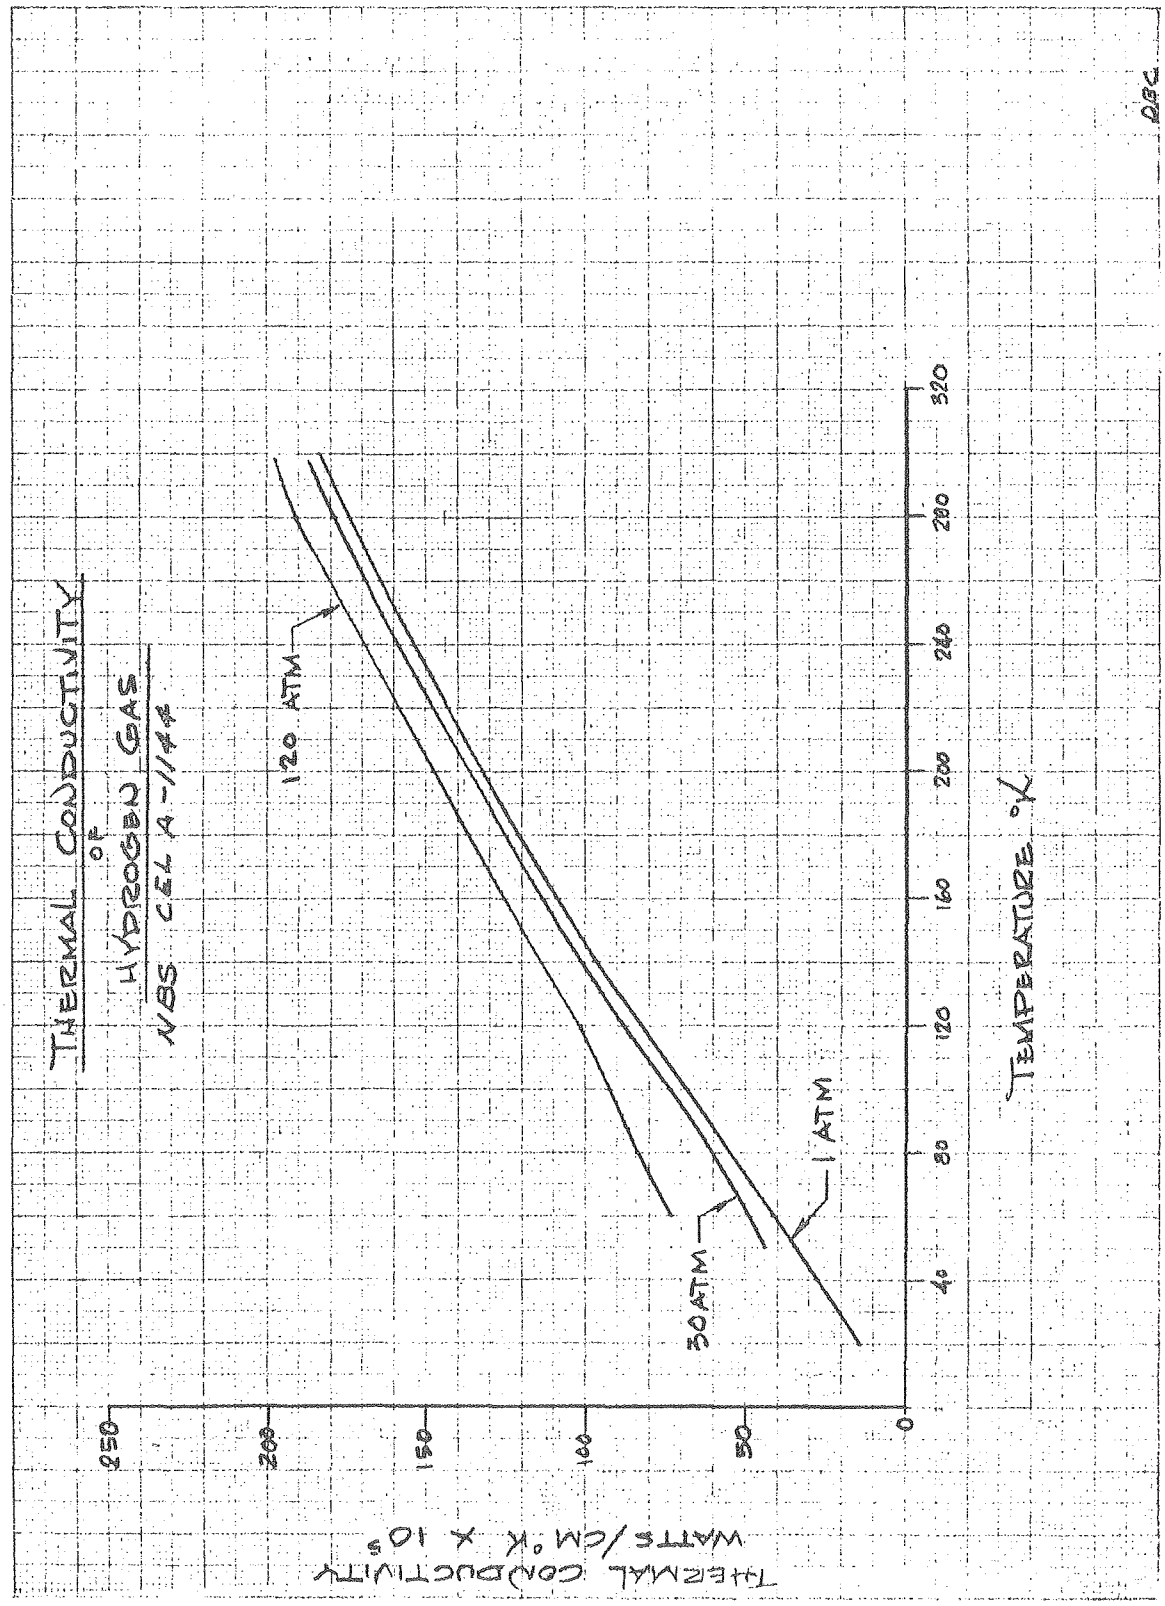
THERMAL CONDUCTIVITY
OF
HYDROGEN GAS
NBS CEL A-1144
120 ATM
30 ATM
1 ATM
THERMAL CONDUCTIVITY
WATTS/CM °K X 10⁵
250
200
150
100
50
0
40
80
120
160
200
240
280
320
TEMPERATURE °K

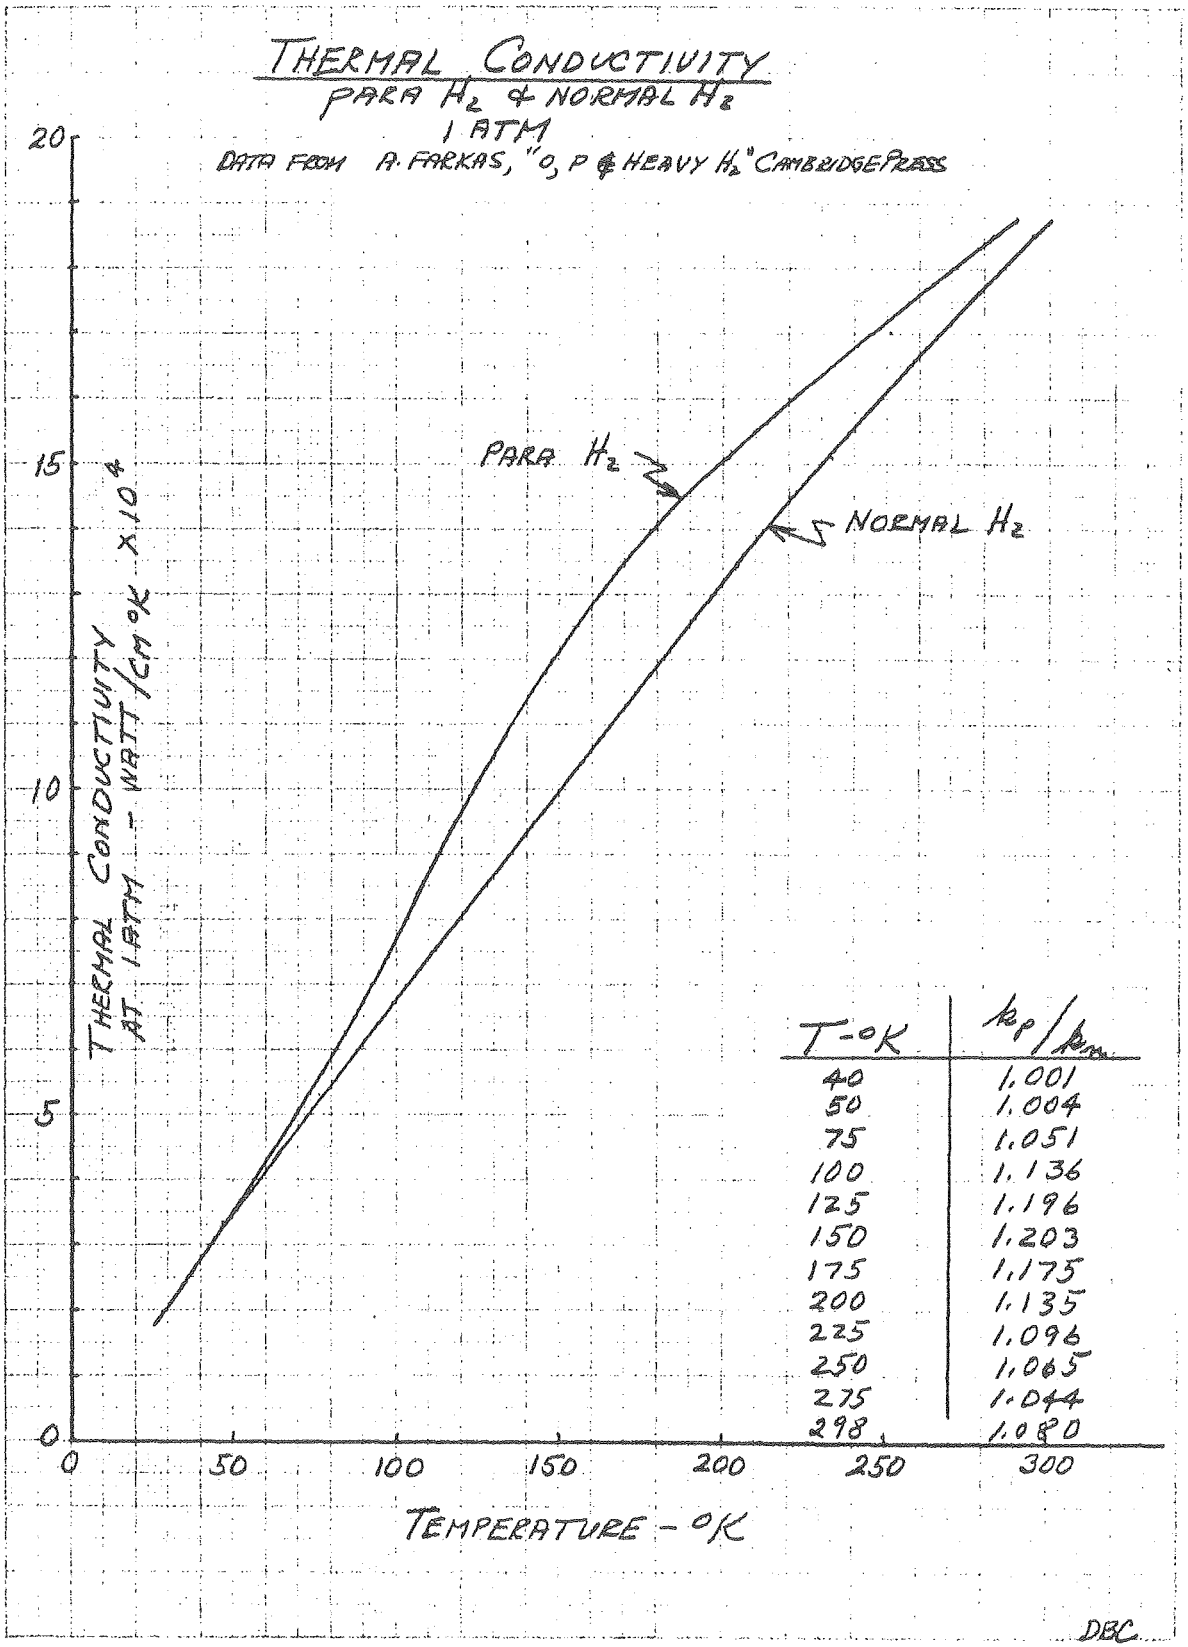

T-°K	k_p/k_n
40	1.001
50	1.004
75	1.051
100	1.136
125	1.196
150	1.203
175	1.175
200	1.135
225	1.096
250	1.065
275	1.044
298	1.080

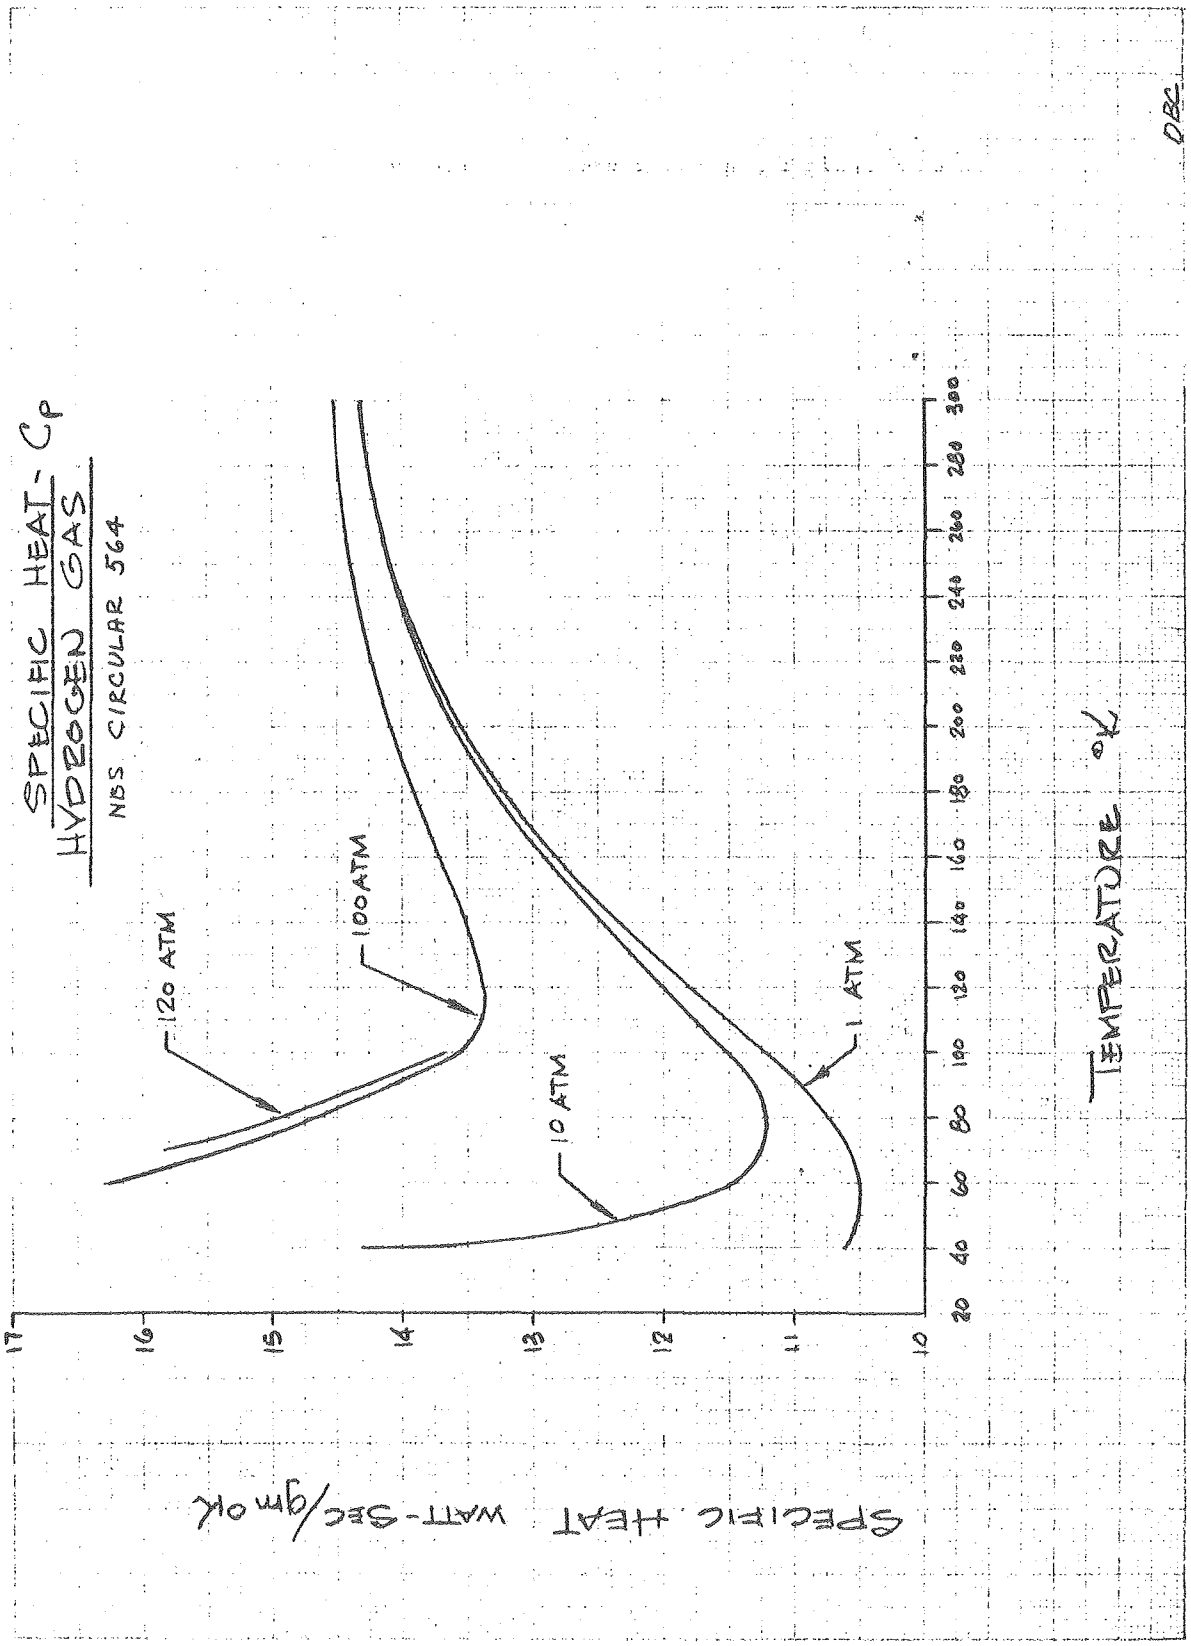
SPECIFIC HEAT- Cp
HYDROGEN GAS
NBS CIRCULAR 564
120 ATM
100 ATM
10 ATM
1 ATM
SPECIFIC HEAT WATT-SEC/gm °K
TEMPERATURE °K
17
16
15
14
13
12
11
10
20
40
60
80
100
120
140
160
180
200
220
240
260
280
300

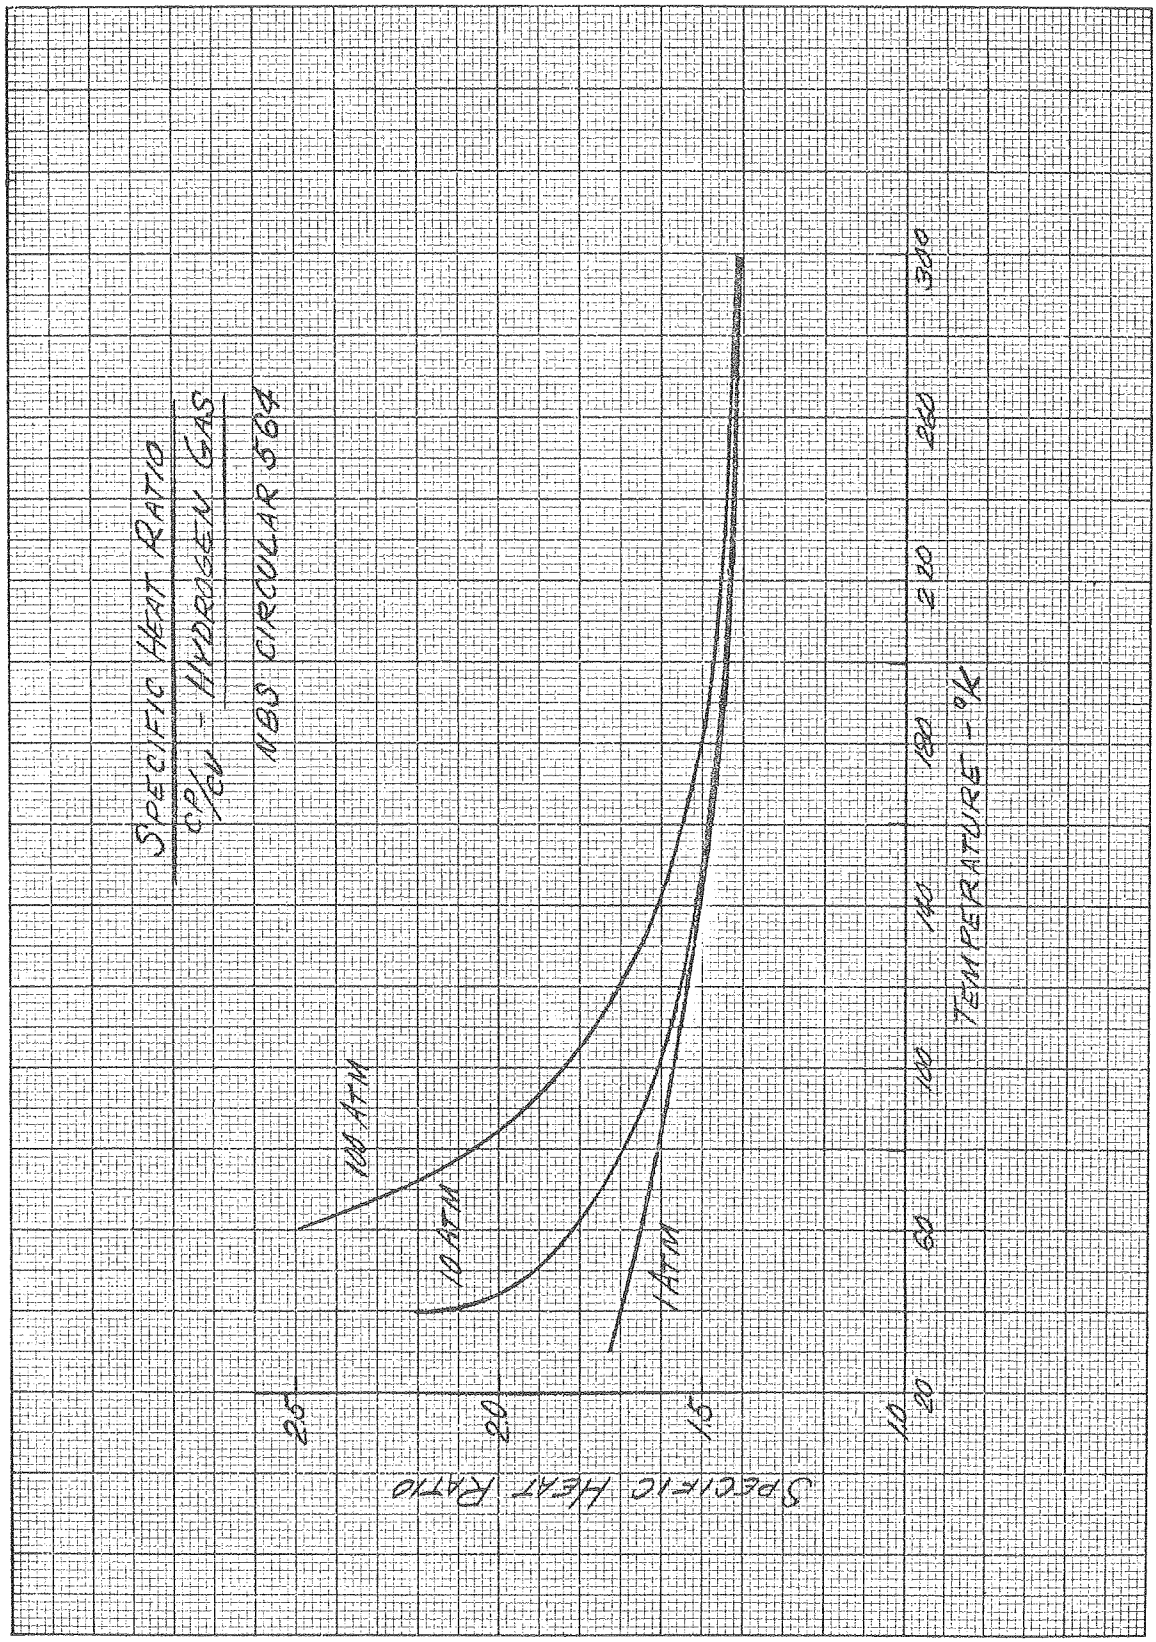
SPECIFIC HEAT RATIO
CP/CV = HYDROGEN GAS
NBS CIRCULAR 564
100 ATM
10 ATM
1 ATM
SPECIFIC HEAT RATIO
2.5
2.0
1.5
1.0
20
60
100
140
180
220
260
300
TEMPERATURE - °K

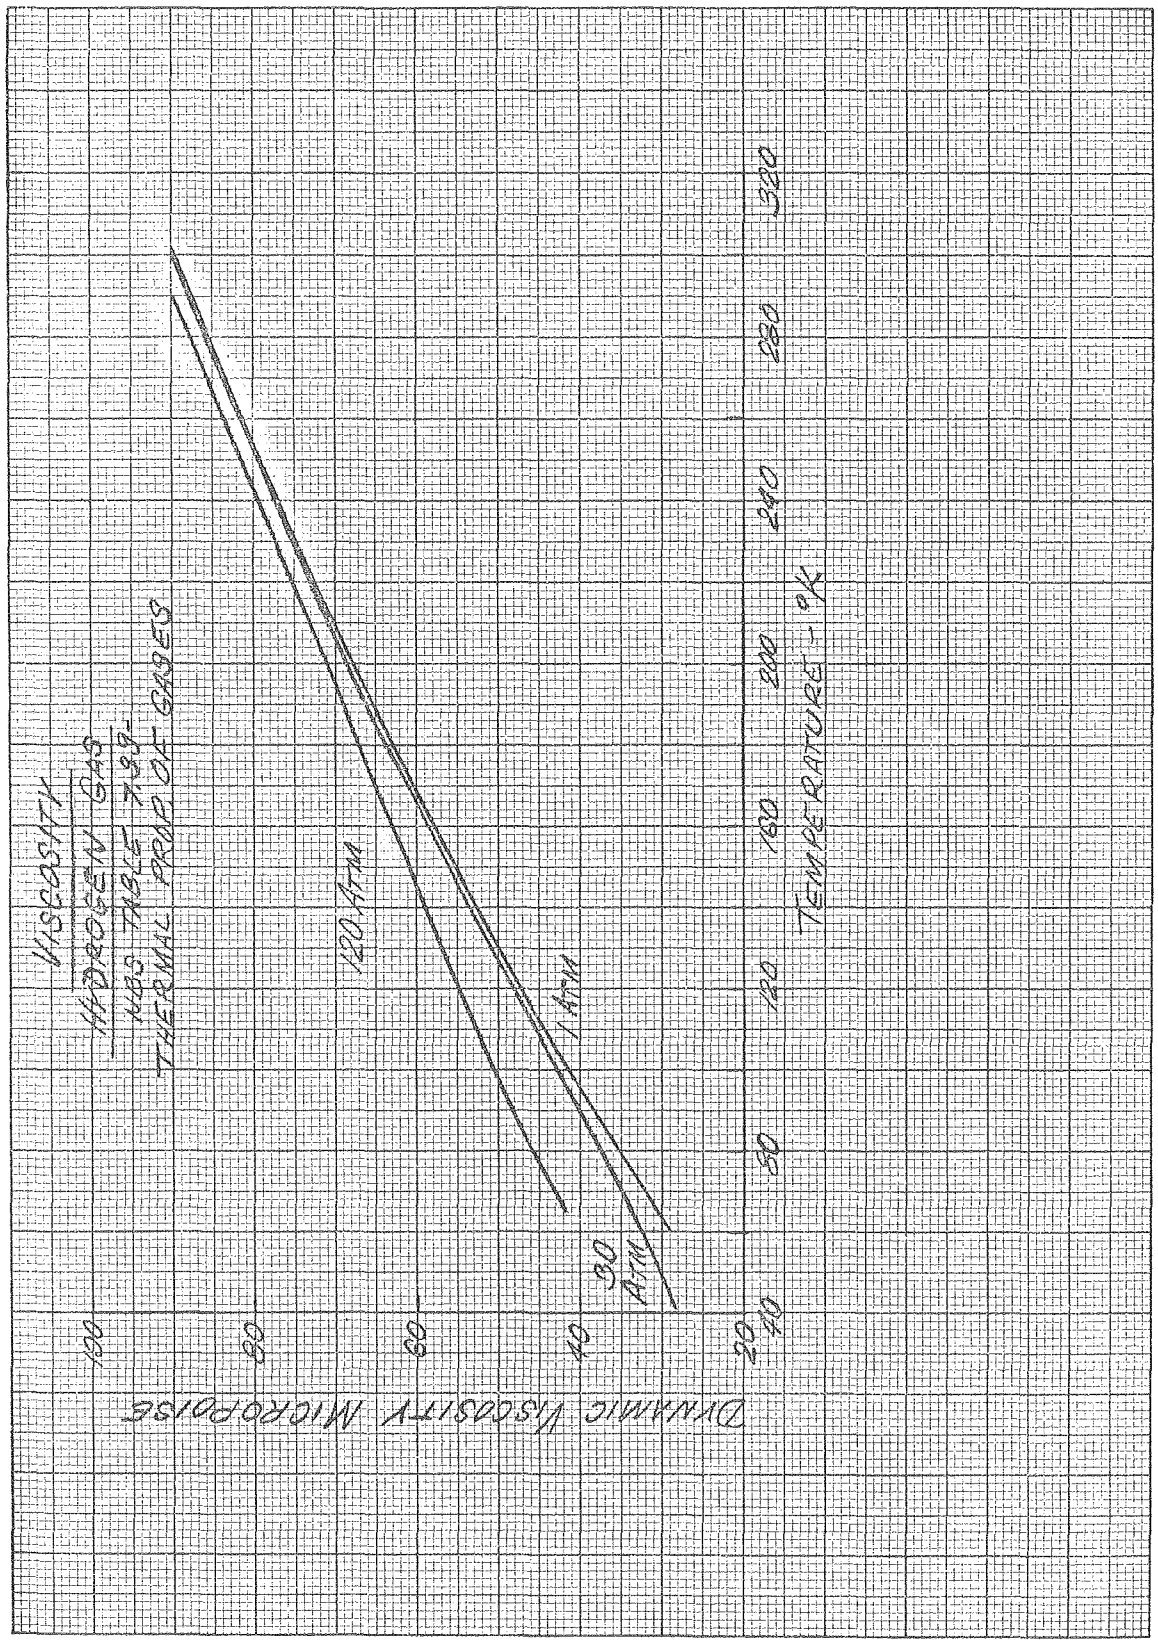
VISCOSITY
HYDROGEN GAS
NBS TABLE 7.39
THERMAL PROP. OF GASES
120 ATM
1 ATM
30 ATM
TEMPERATURE - °K
40
80
120
160
200
240
280
320
DYNAMIC VISCOSITY MICROPOISE
100
80
60
40
20

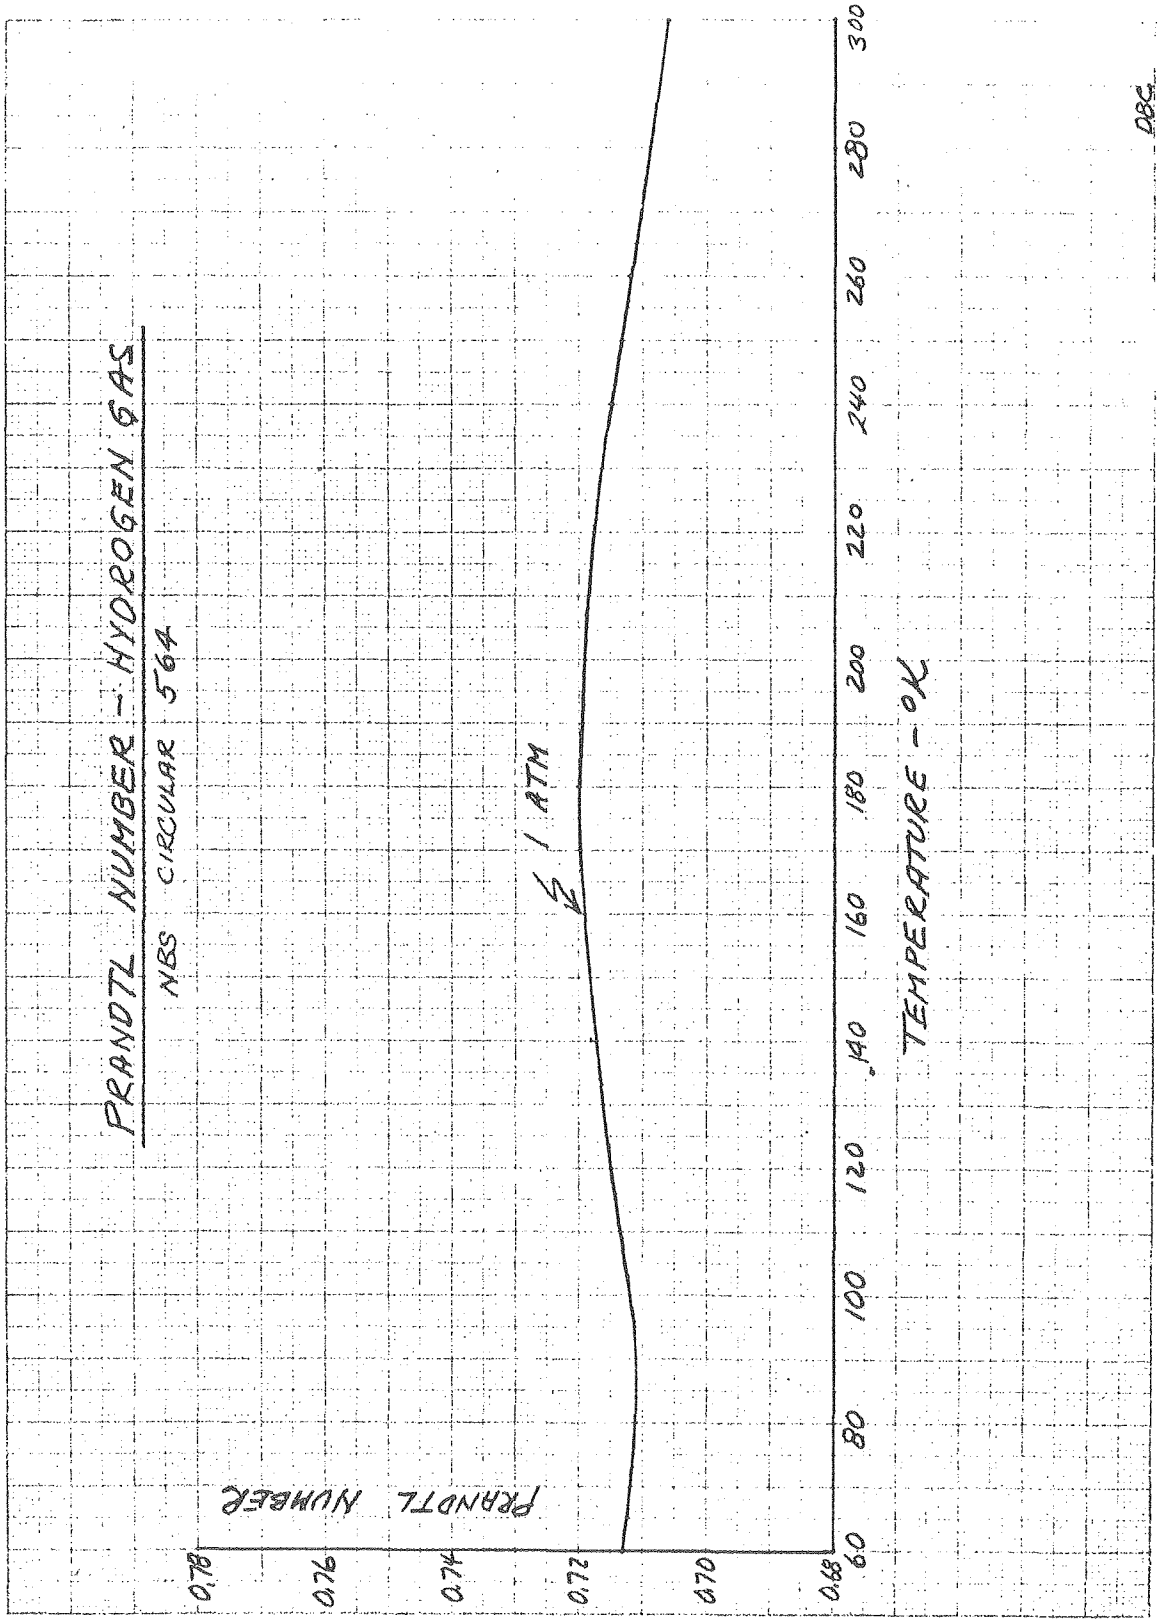
PRANDTL NUMBER - HYDROGEN GAS
NBS CIRCULAR 564
1 ATM
PRANDTL NUMBER
0.78
0.76
0.74
0.72
0.70
0.68
60
80
100
120
140
160
180
200
220
240
260
280
300
TEMPERATURE - °K
DBG

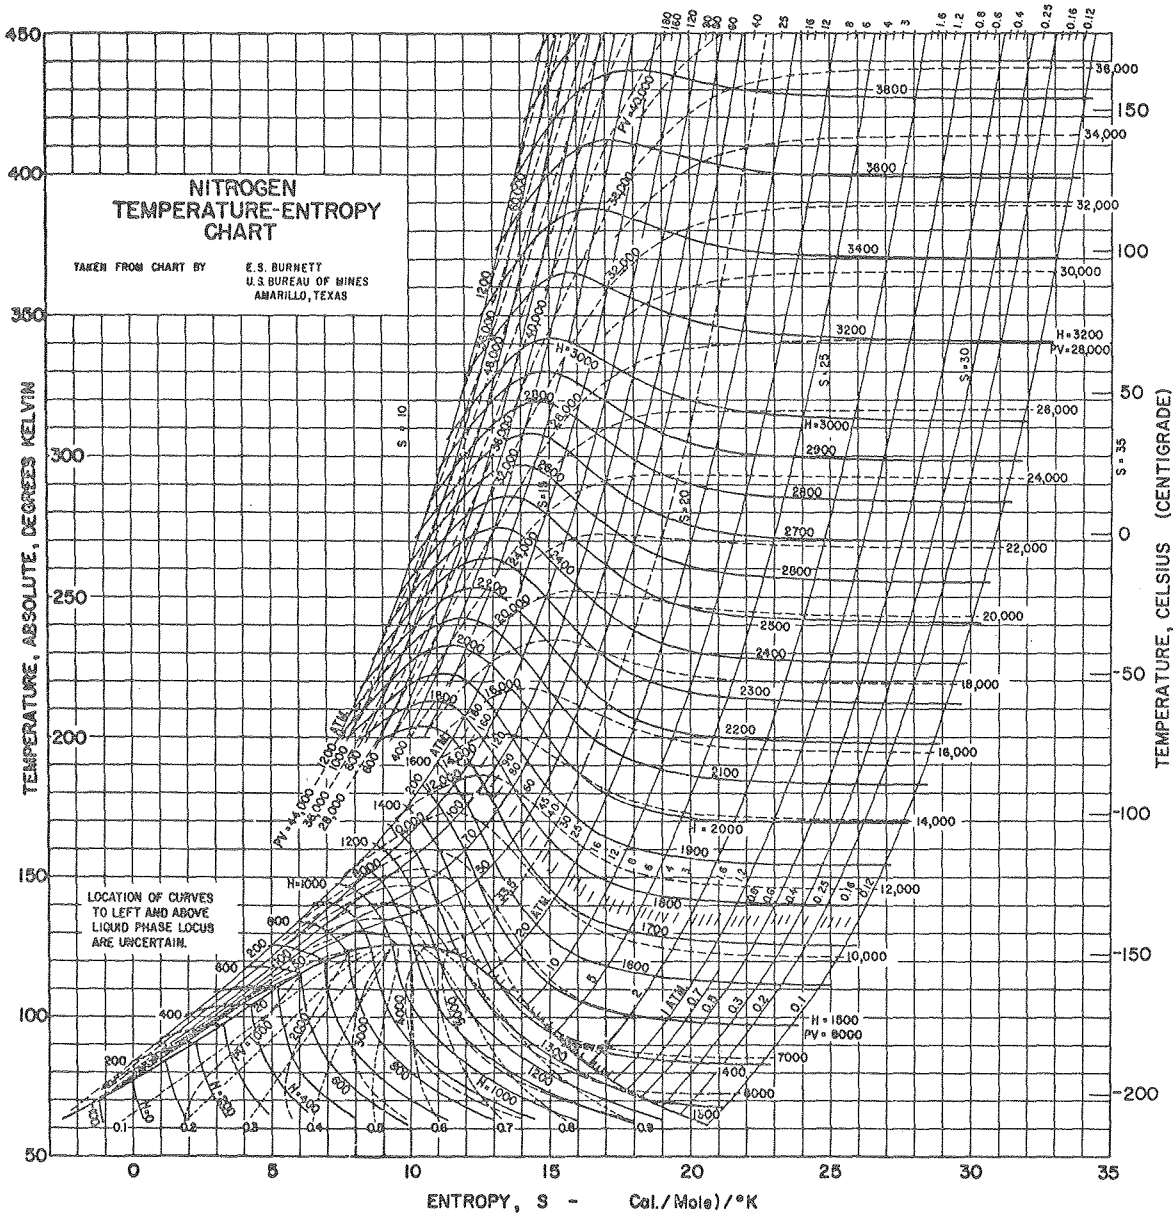
NITROGEN
TEMPERATURE-ENTROPY
CHART
TAKEN FROM CHART BY E.S. BURNETT
U.S. BUREAU OF MINES
AMARILLO, TEXAS
LOCATION OF CURVES
TO LEFT AND ABOVE
LIQUID PHASE LOCUS
ARE UNCERTAIN.
TEMPERATURE, ABSOLUTE, DEGREES KELVIN
TEMPERATURE, CELSIUS (CENTIGRADE)
ENTROPY, S - Cal./Mole)/°K

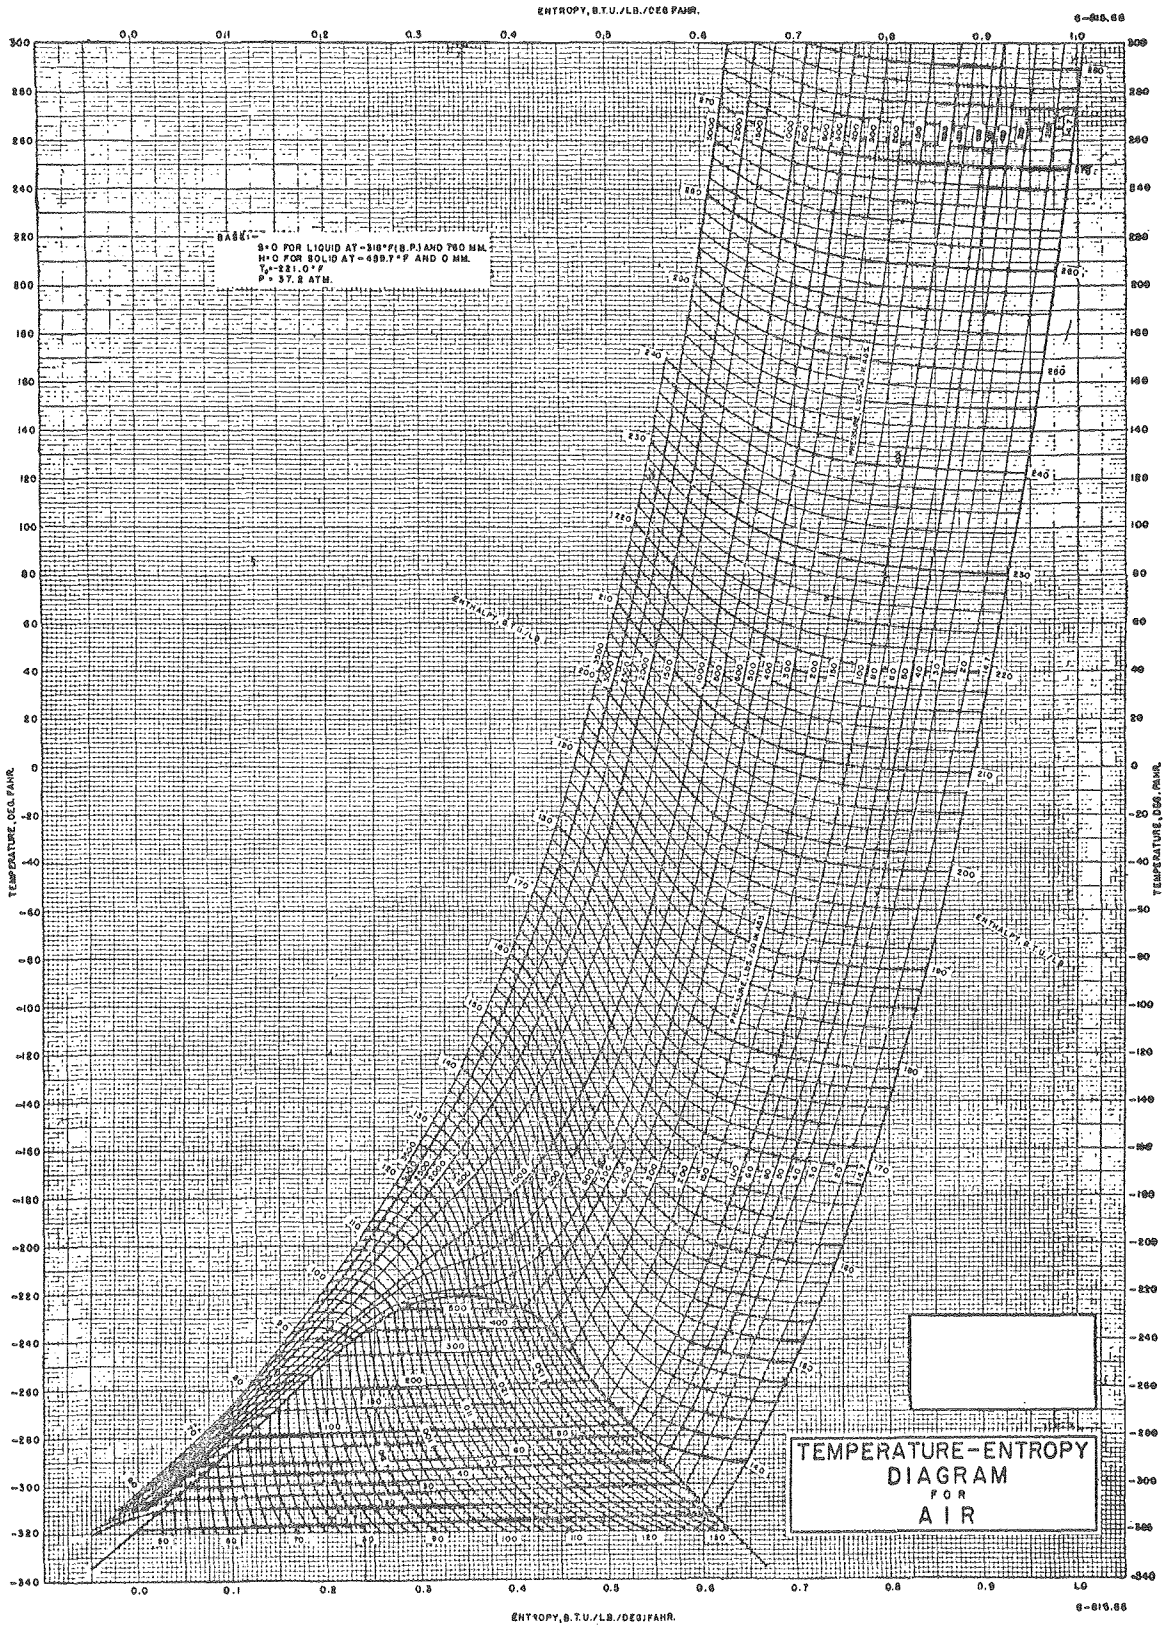

Fig. 16.5. Temperature-entropy diagram for air. Courtesy M. W. Kellogg Co.

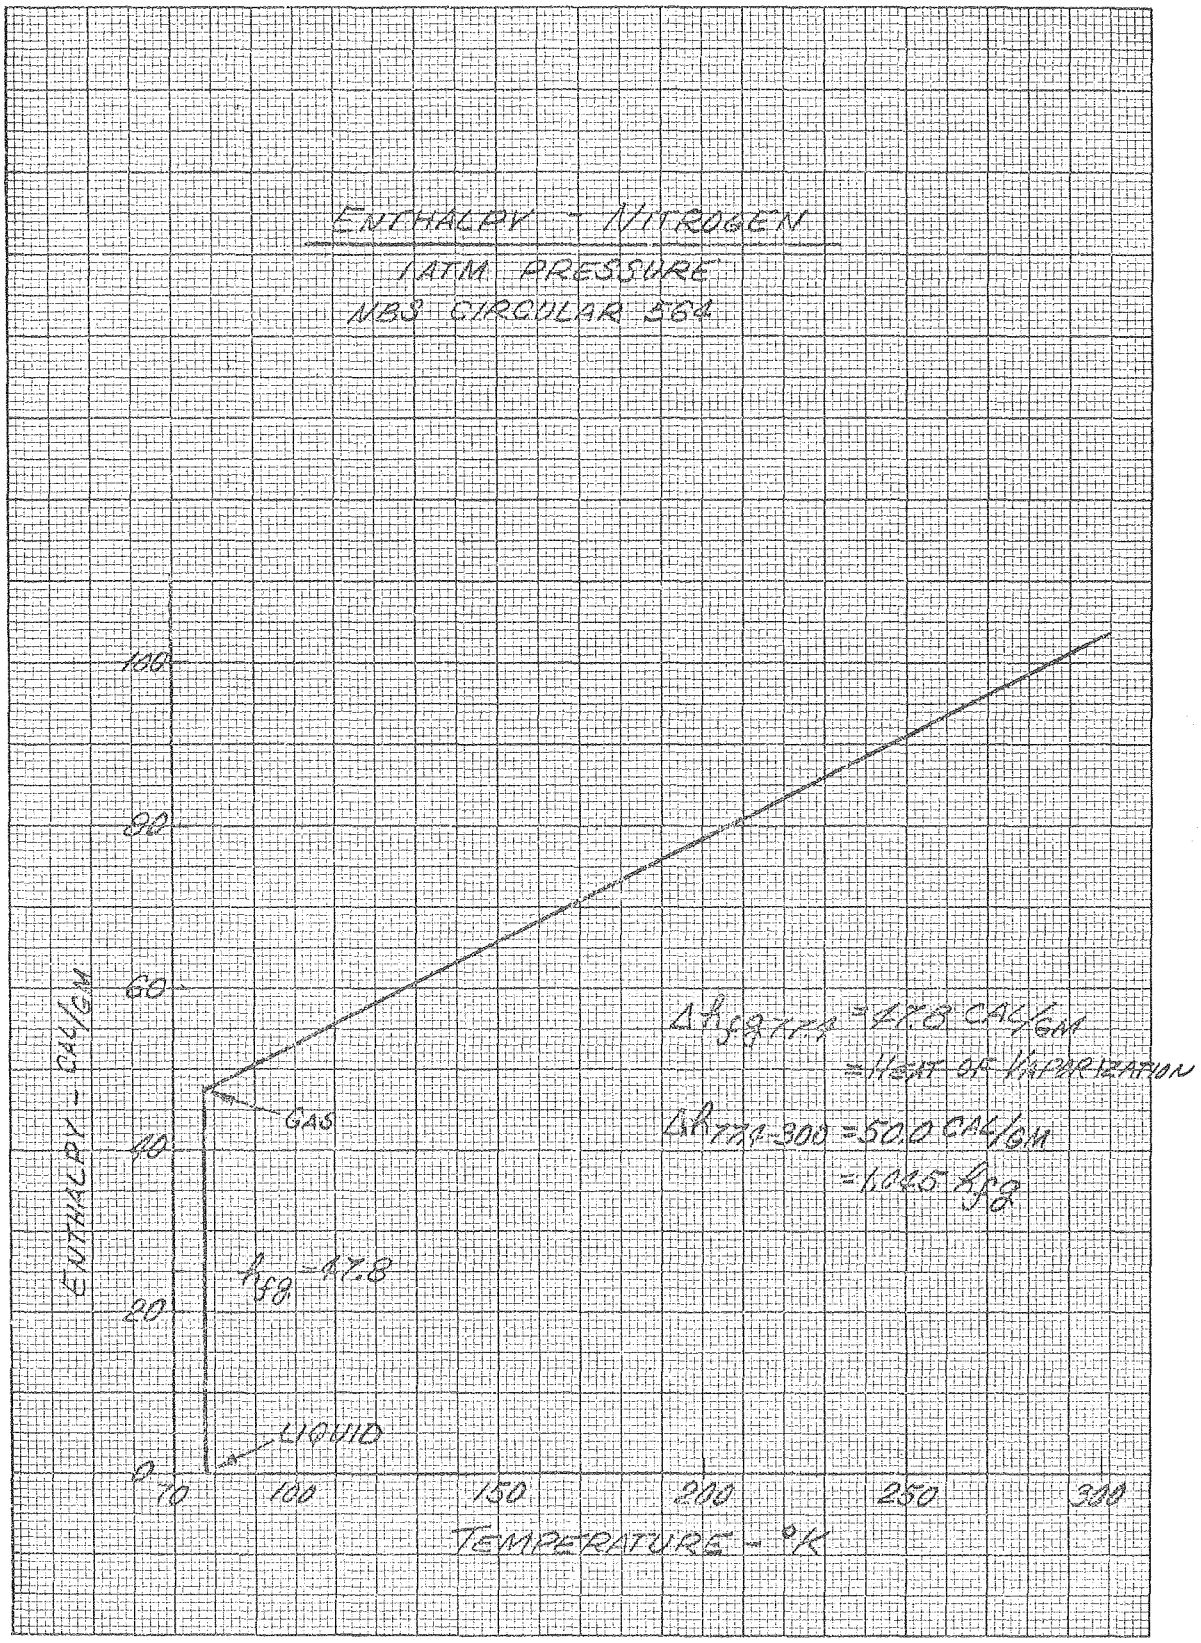
ENTHALPY - NITROGEN
1 ATM PRESSURE
NBS CIRCULAR 564
ENTHALPY - CAL/GM
TEMPERATURE - °K
100
80
60
40
20
0
70
100
150
200
250
300
GAS
LIQUID
$h_{68} = 47.8$
$\Delta h_{68\,77.4} = 47.8$ CAL/GM
= HEAT OF VAPORIZATION
$\Delta h_{77.4\text{-}300} = 50.0$ CAL/GM
= 1045 J/G

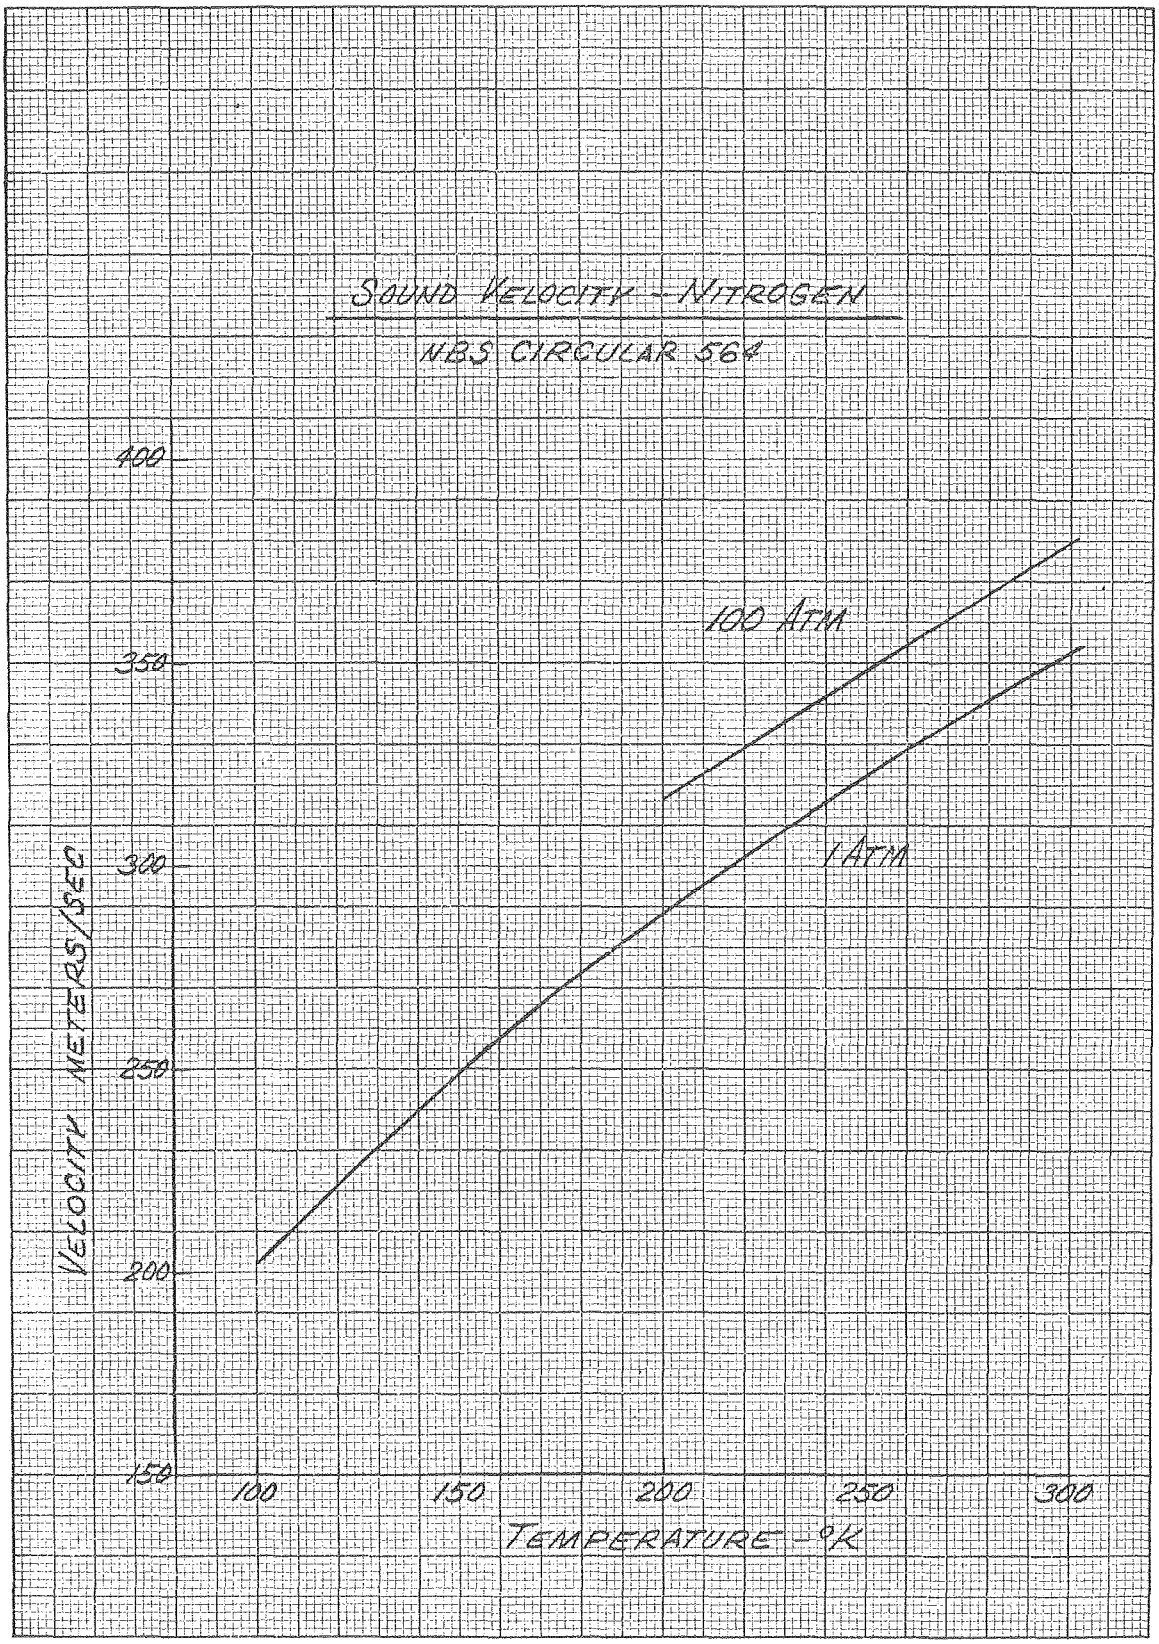
SOUND VELOCITY - NITROGEN
NBS CIRCULAR 564
400
350
300
250
200
150
VELOCITY METERS/SEC
100 ATM
1 ATM
100
150
200
250
300
TEMPERATURE - °K

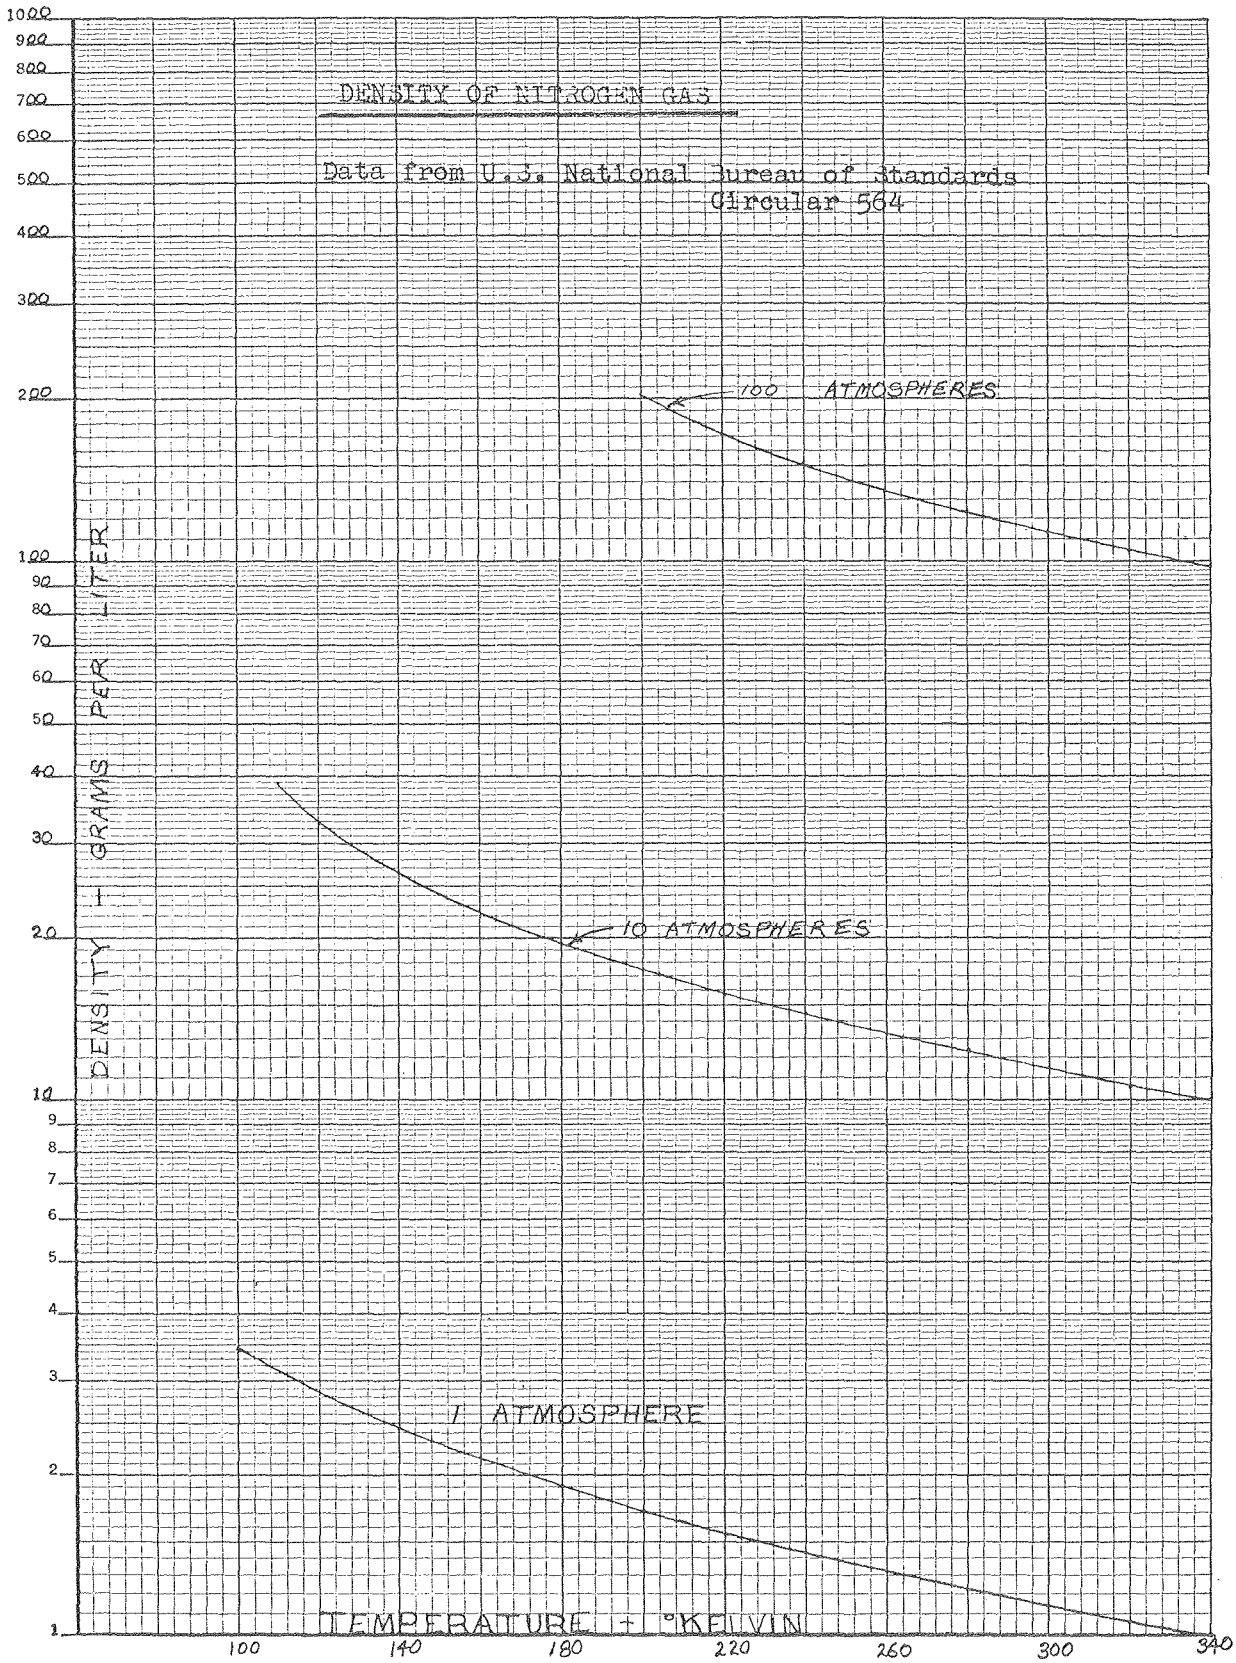
DENSITY OF NITROGEN GAS
Data from U.S. National Bureau of Standards Circular 564
100 ATMOSPHERES
10 ATMOSPHERES
1 ATMOSPHERE
DENSITY ± GRAMS PER LITER
TEMPERATURE ± °KELVIN
1000
900
800
700
600
500
400
300
200
100
90
80
70
60
50
40
30
20
10
9
8
7
6
5
4
3
2
1
100
140
180
220
260
300
340

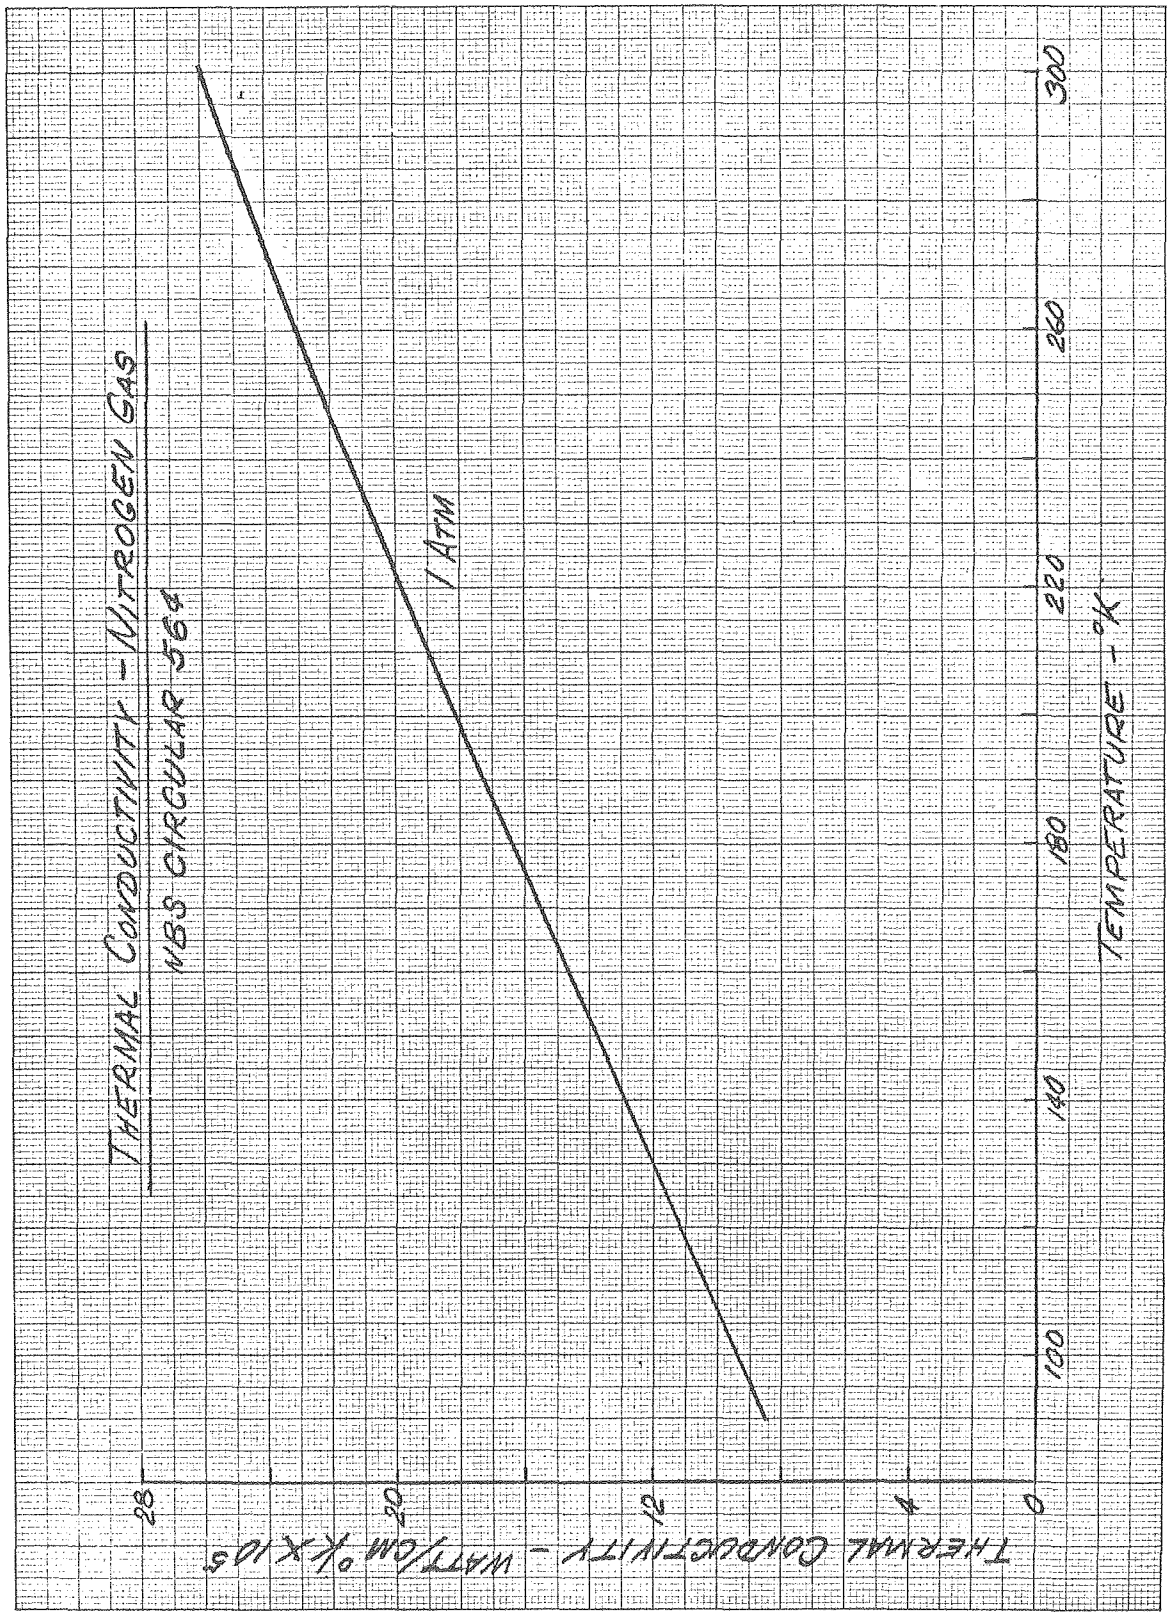
THERMAL CONDUCTIVITY - NITROGEN GAS
NBS CIRCULAR 564
1 ATM
THERMAL CONDUCTIVITY - WATT/CM °K X 10^5
28
20
12
4
0
100
140
180
220
260
300
TEMPERATURE - °K

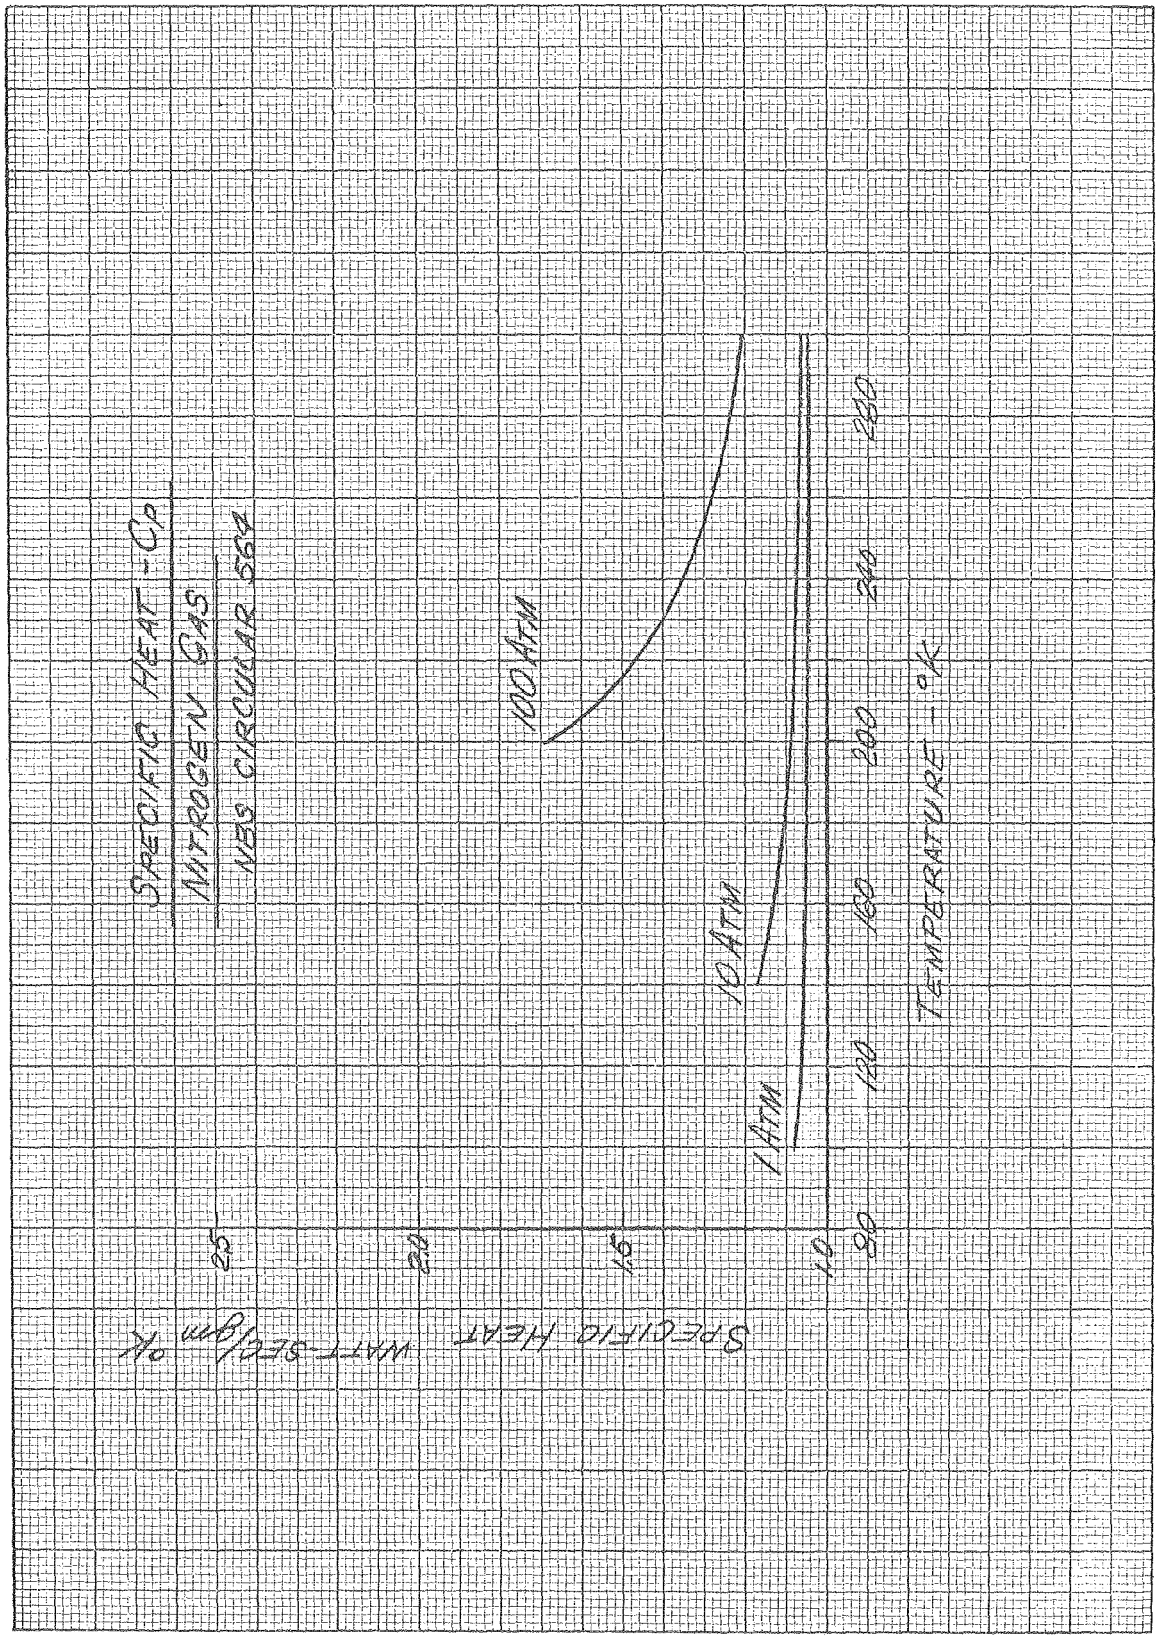
SPECIFIC HEAT - Cp
NITROGEN GAS
NBS CIRCULAR 564
100 ATM
10 ATM
1 ATM
25
20
15
10
SPECIFIC HEAT
WATT-SEC/gm °K
80
120
160
200
240
280
TEMPERATURE - °K

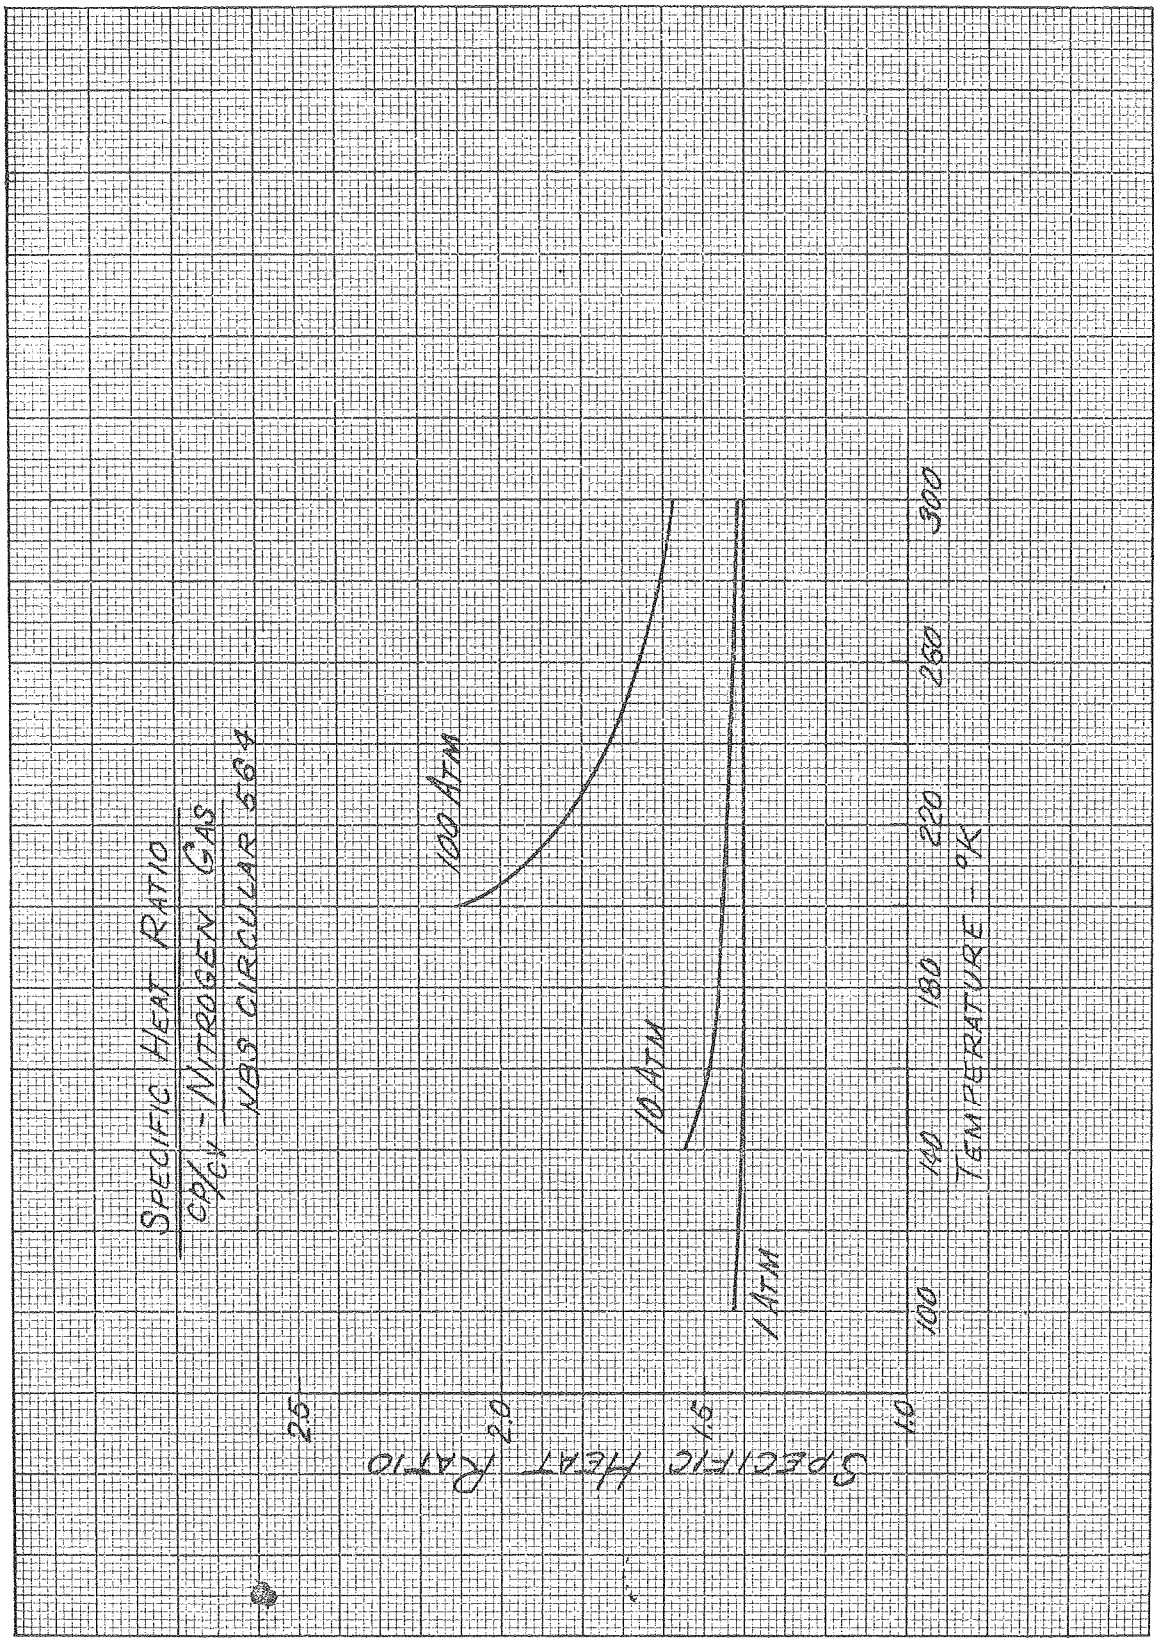
SPECIFIC HEAT RATIO
CP/CV - NITROGEN GAS
NBS CIRCULAR 564
100 ATM
10 ATM
1 ATM
2.5
2.0
1.5
1.0
SPECIFIC HEAT RATIO
100
140
180
220
260
300
TEMPERATURE - °K

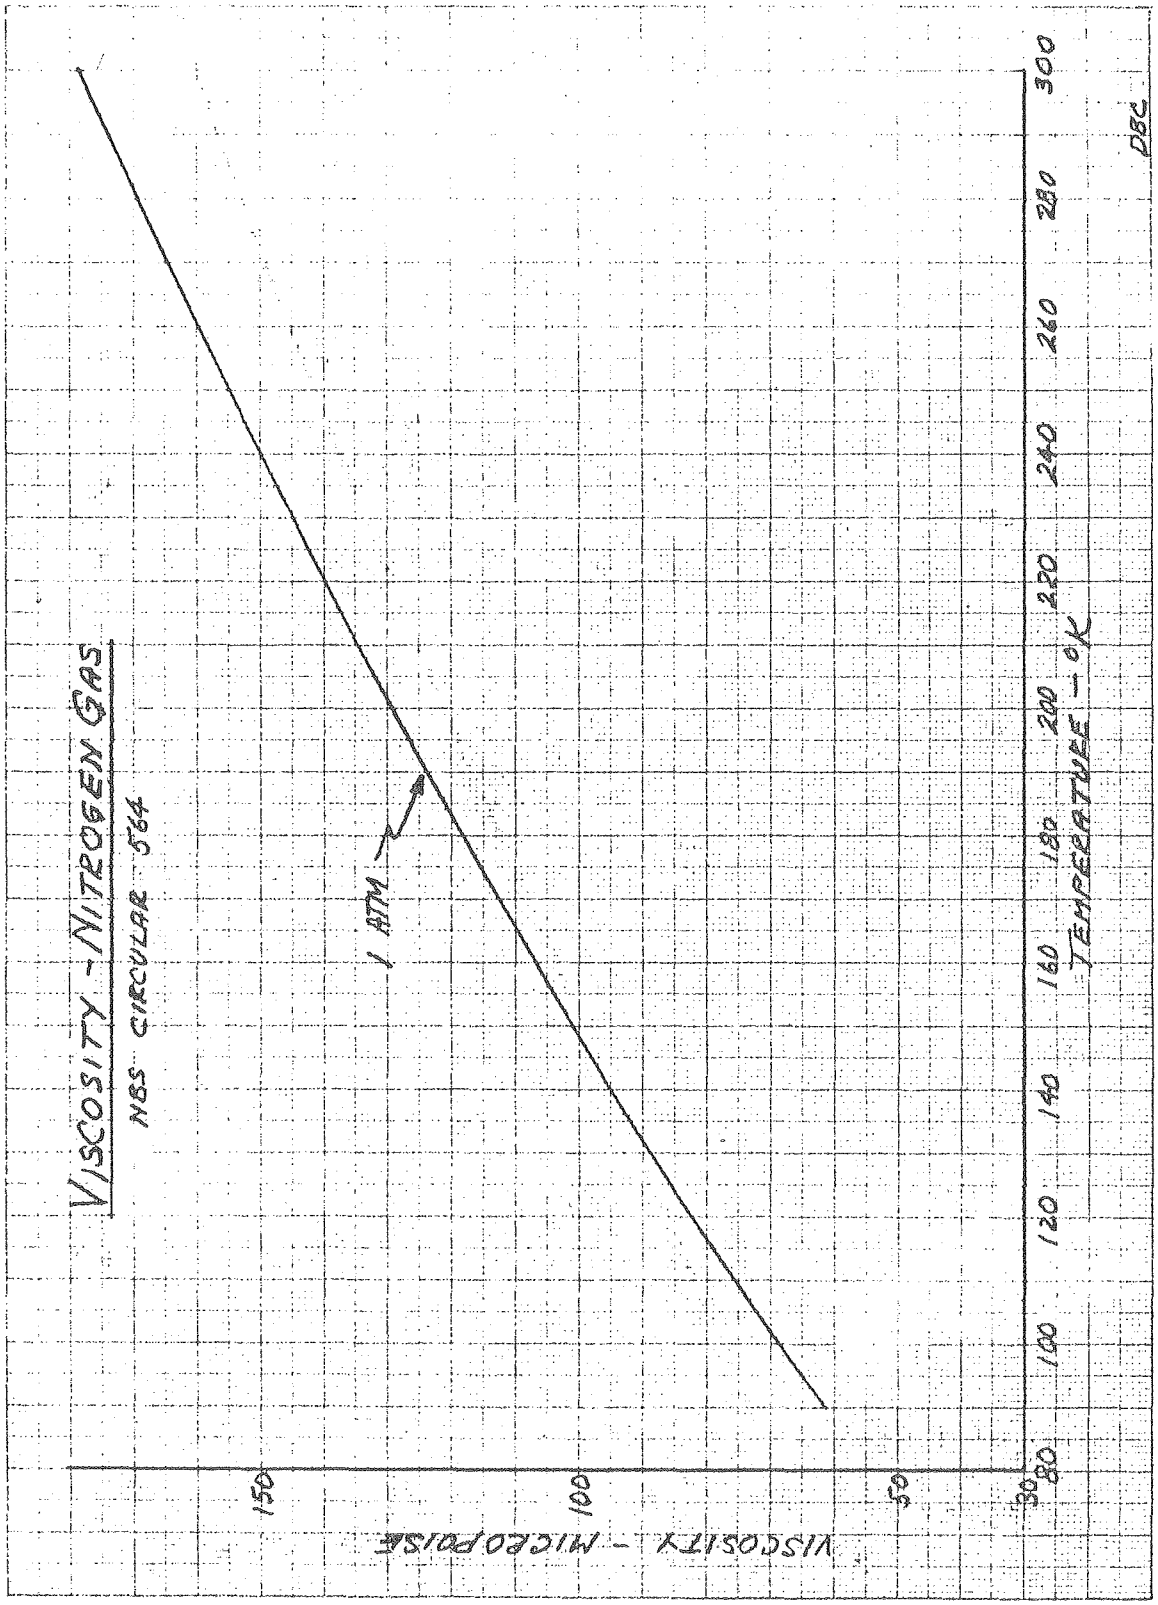
VISCOSITY - NITROGEN GAS
NBS CIRCULAR 564
1 ATM
VISCOSITY - MICROPOISE
150
100
50
80
100
120
140
160
180
200
220
240
260
280
300
TEMPERATURE - °K
DBC

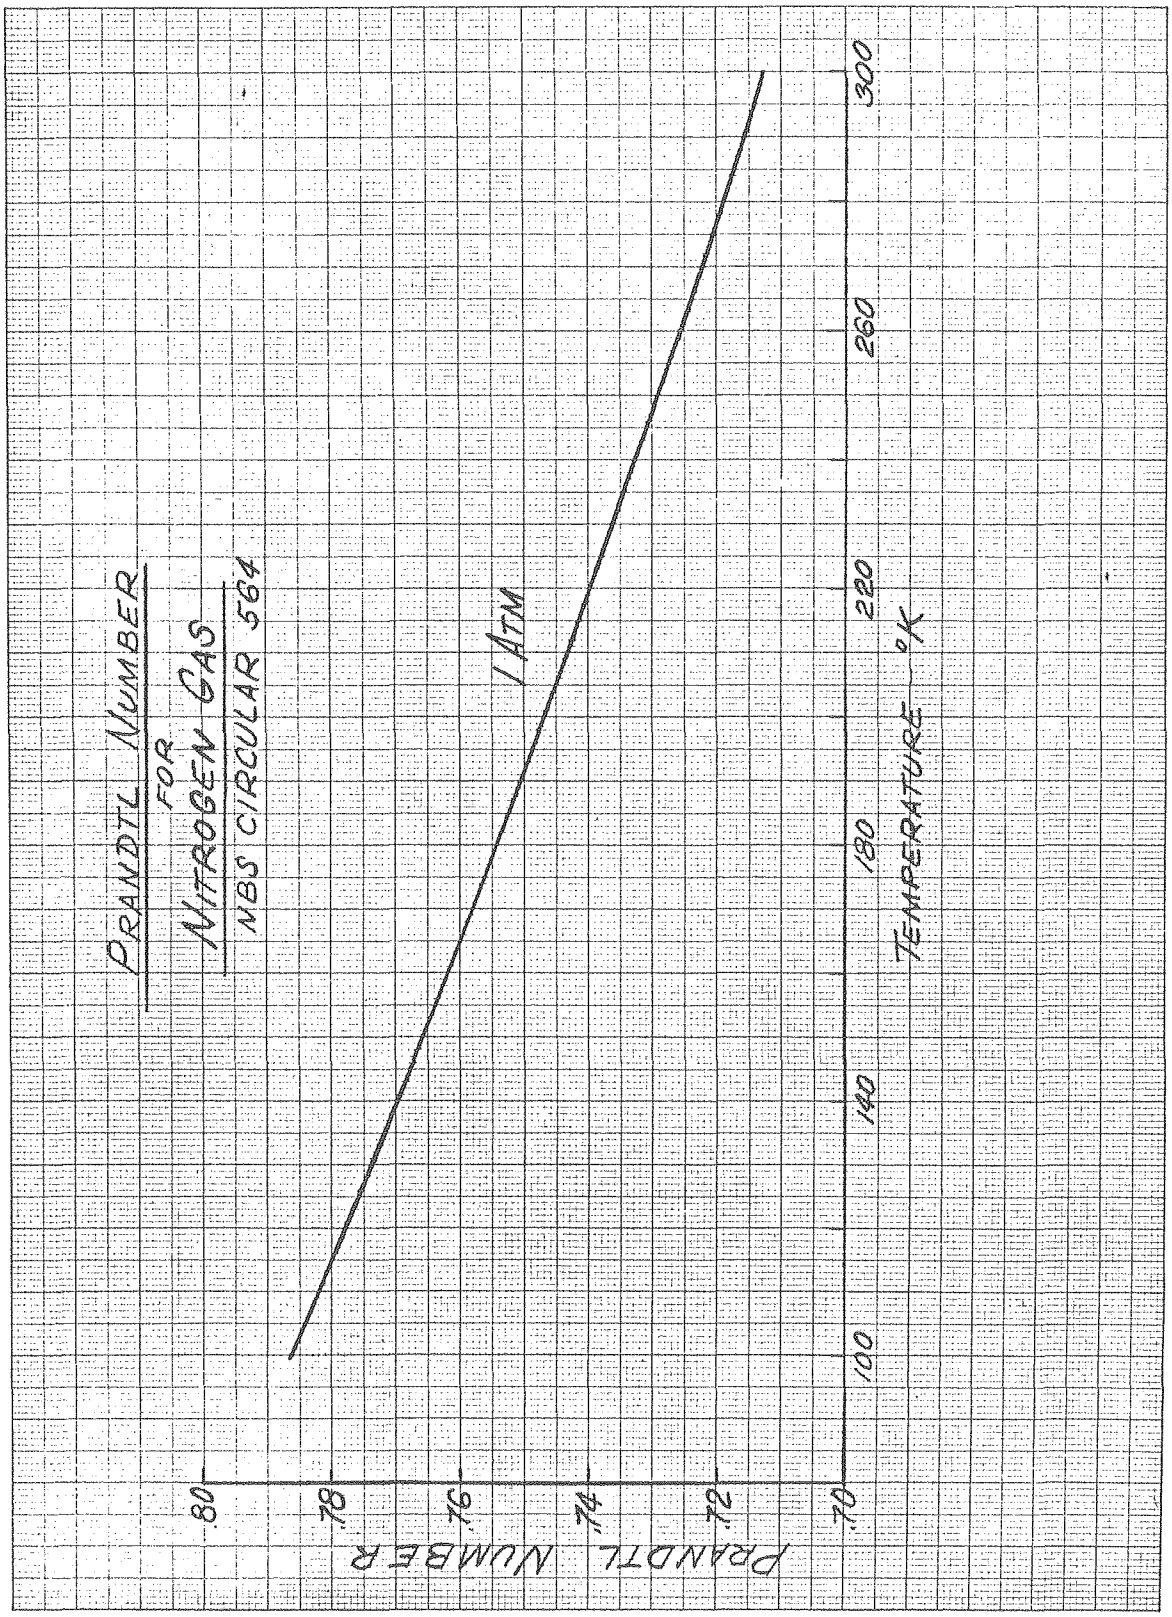
PRANDTL NUMBER
FOR
NITROGEN GAS
NBS CIRCULAR 564
1 ATM
PRANDTL NUMBER
.80
.78
.76
.74
.72
.70
100
140
180
220
260
300
TEMPERATURE °K

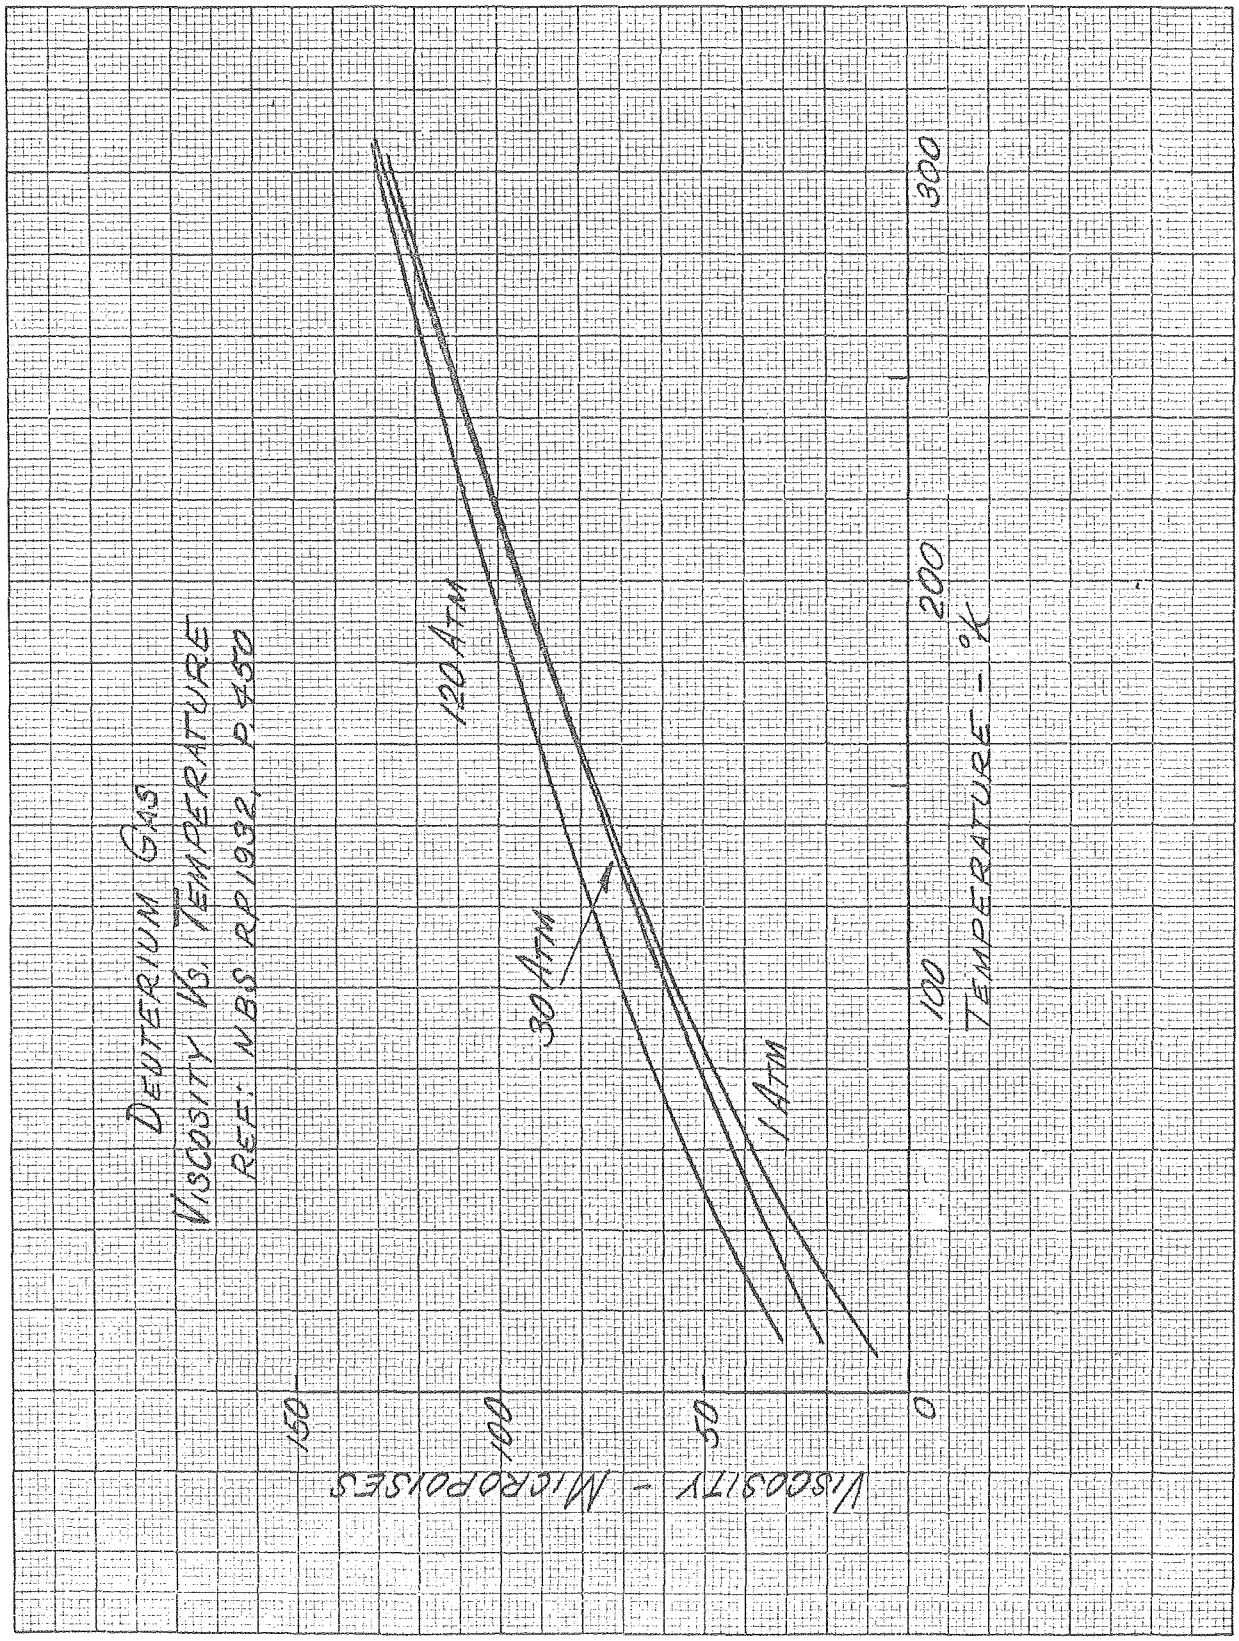
DEUTERIUM GAS
VISCOSITY VS. TEMPERATURE
REF.: NBS RP1932, P. 450
120 ATM
30 ATM
1 ATM
VISCOSITY - MICROPOISES
150
100
50
0
100
200
300
TEMPERATURE - °K

GASEOUS DEUTERIUM
ENTHALPY VS. TEMPERATURE

REF: CAMBRIDGE CORP. ENGN. MEMO. #3
SOMERVILLE, MASS.

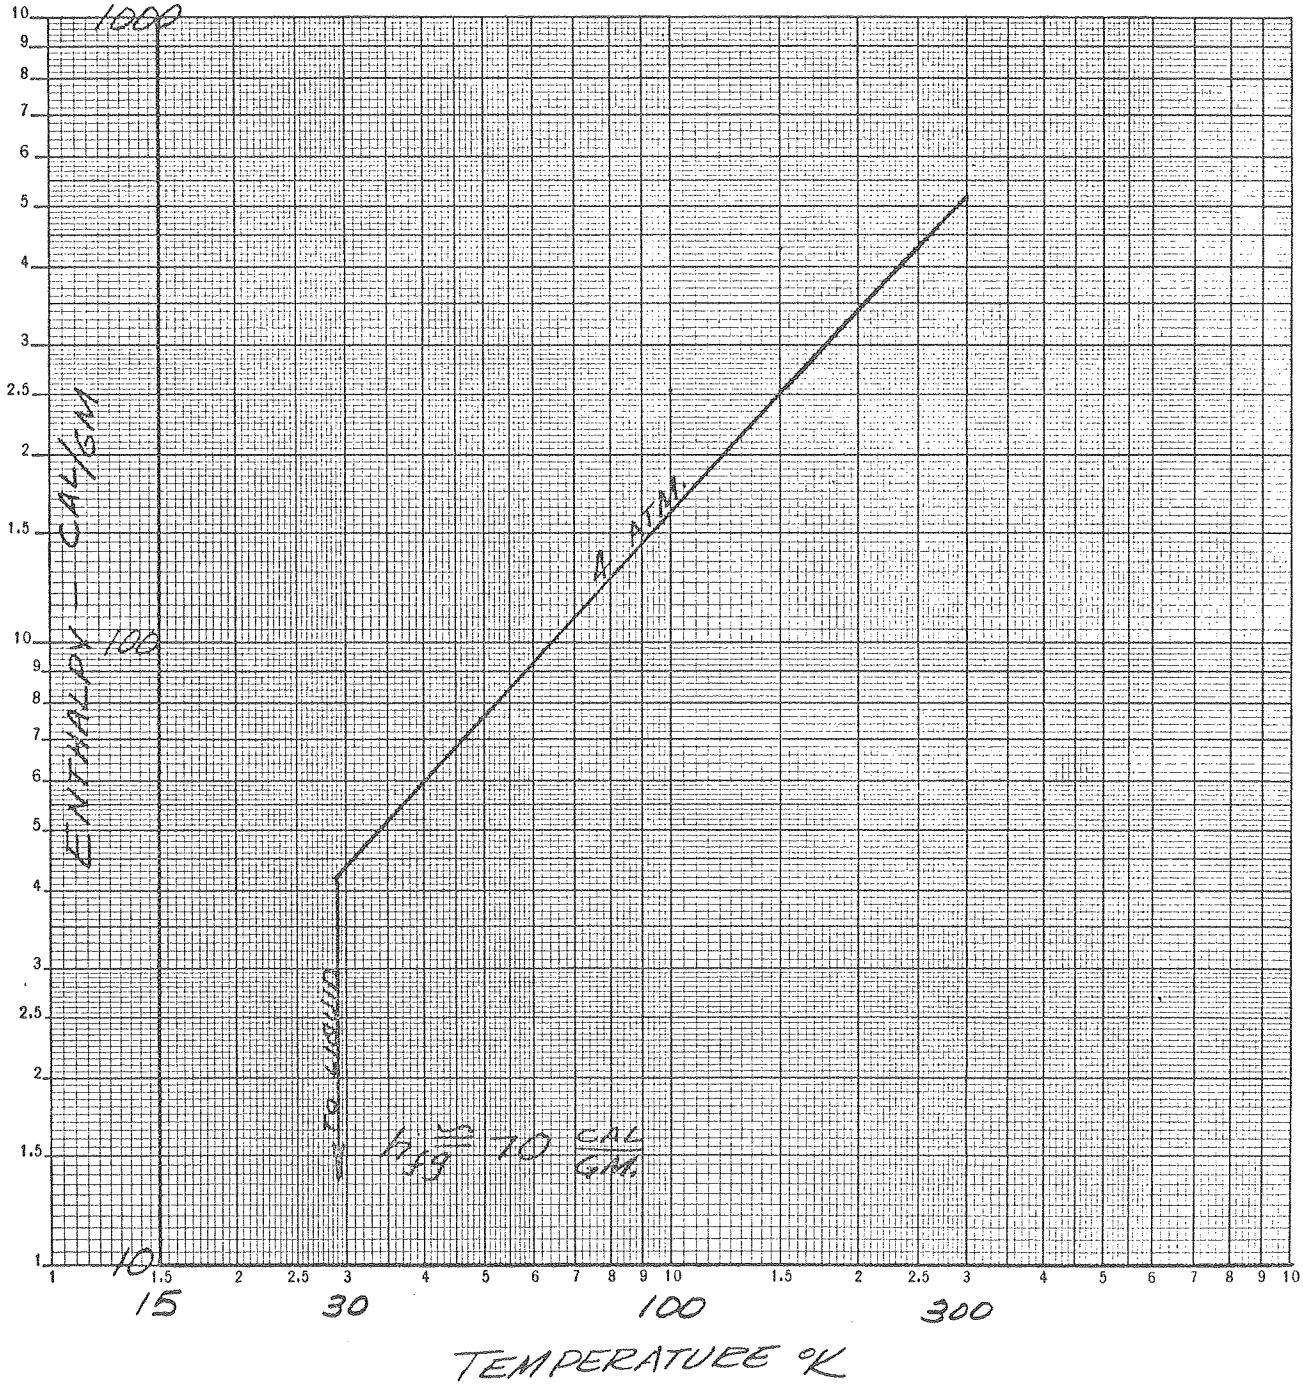

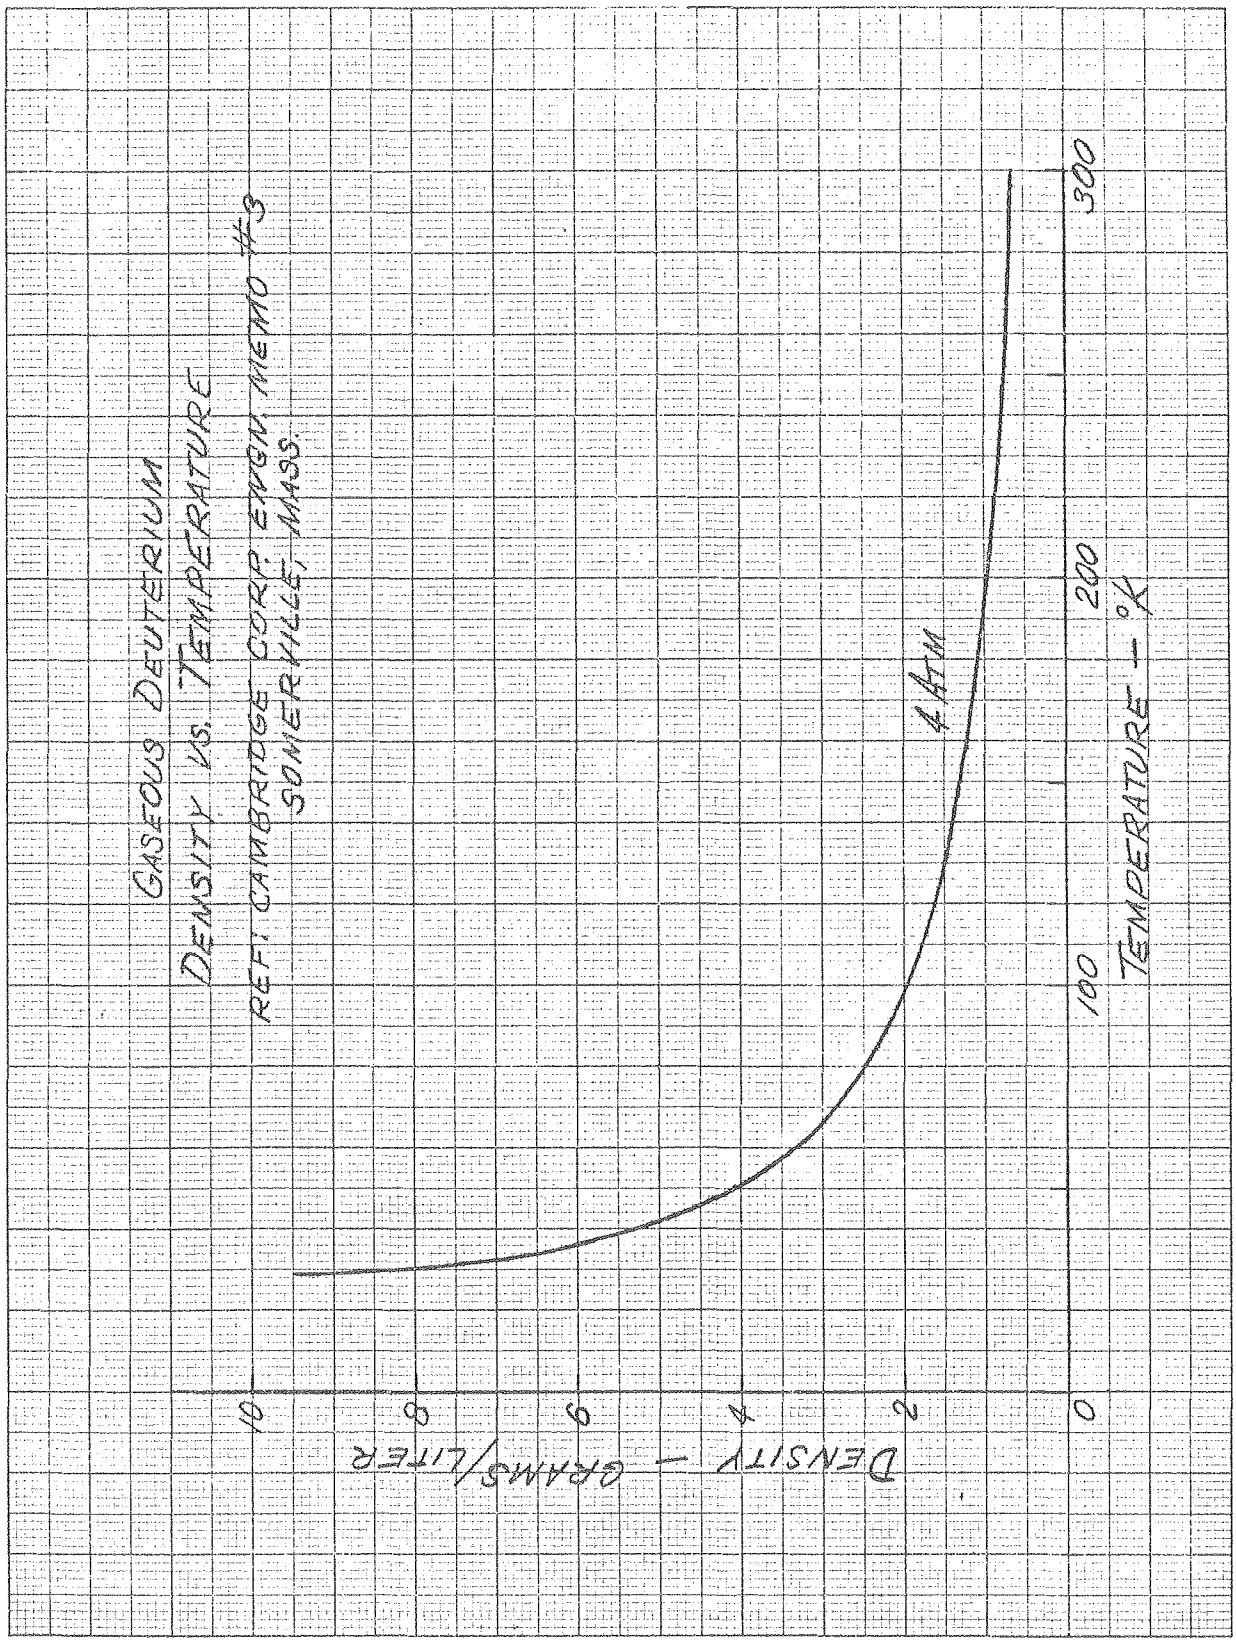
GASEOUS DEUTERIUM
DENSITY VS. TEMPERATURE
REF: CAMBRIDGE CORP. ENGN. MEMO #3
SOMERVILLE, MASS.
4 ATM
TEMPERATURE — °K
0
100
200
300
DENSITY — GRAMS/LITER
10
8
6
4
2

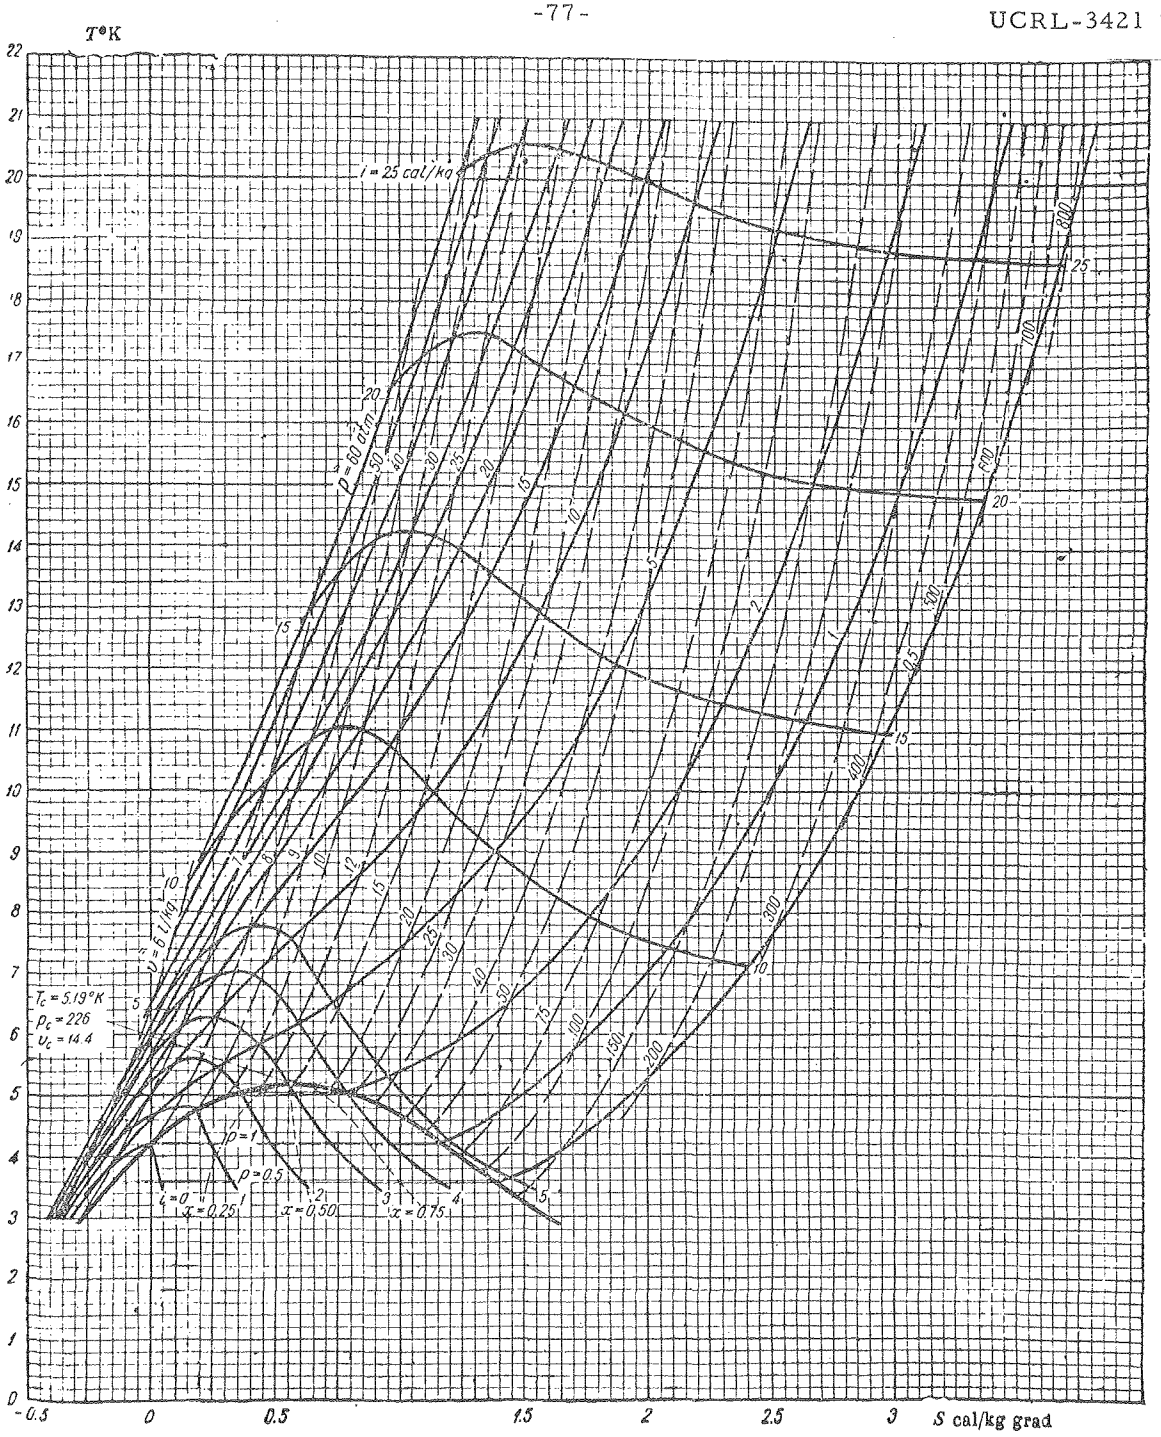

Fig. 2. $T-S$ diagram of helium

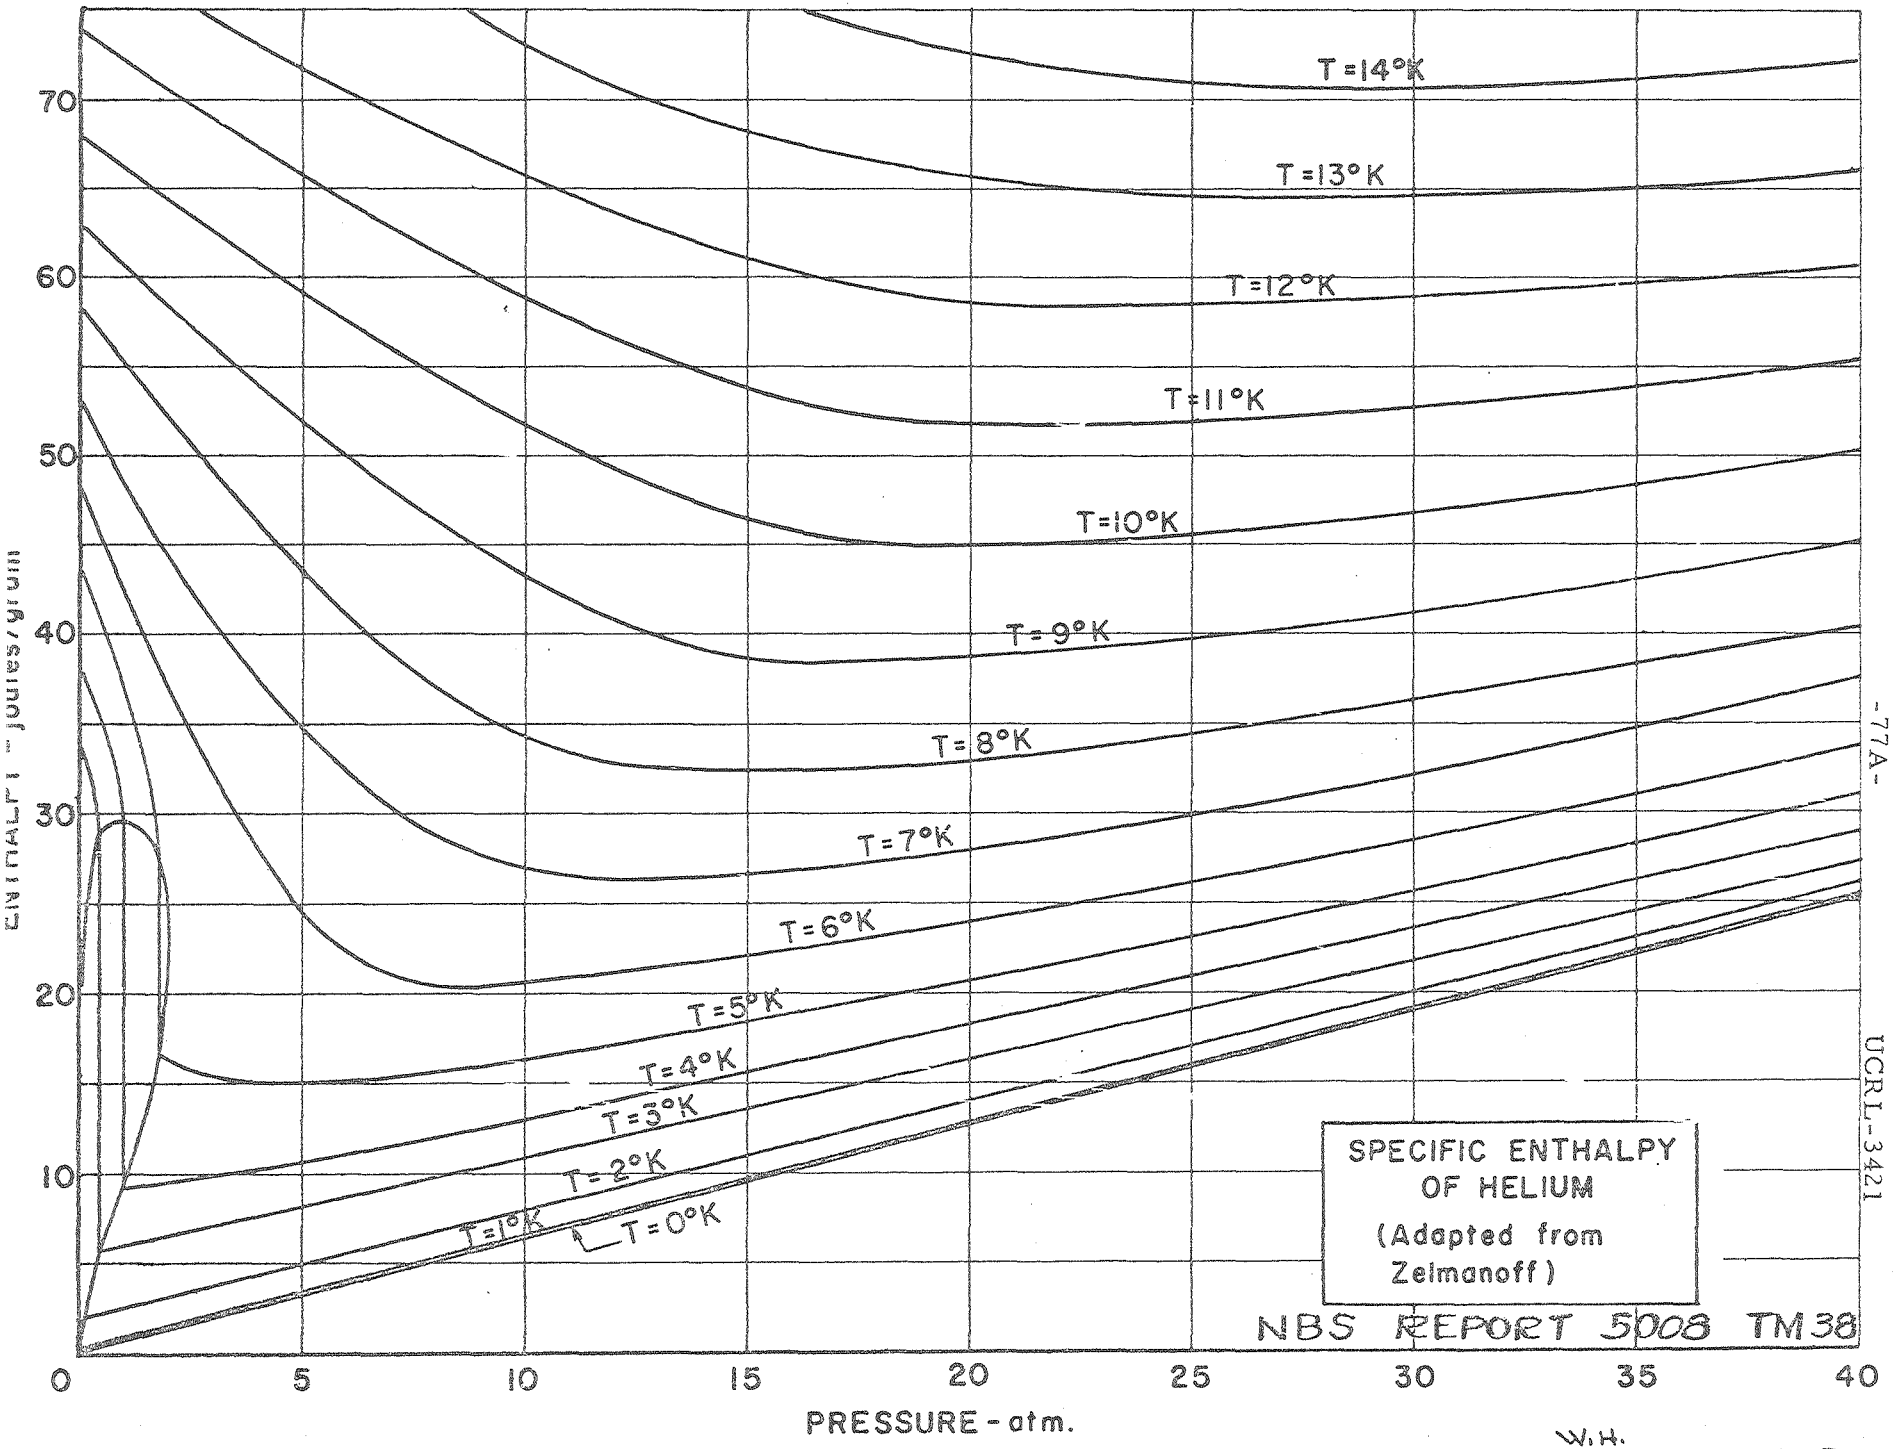

W.H.
8-20-56 A-2135

THIS IS A BLANK PAGE

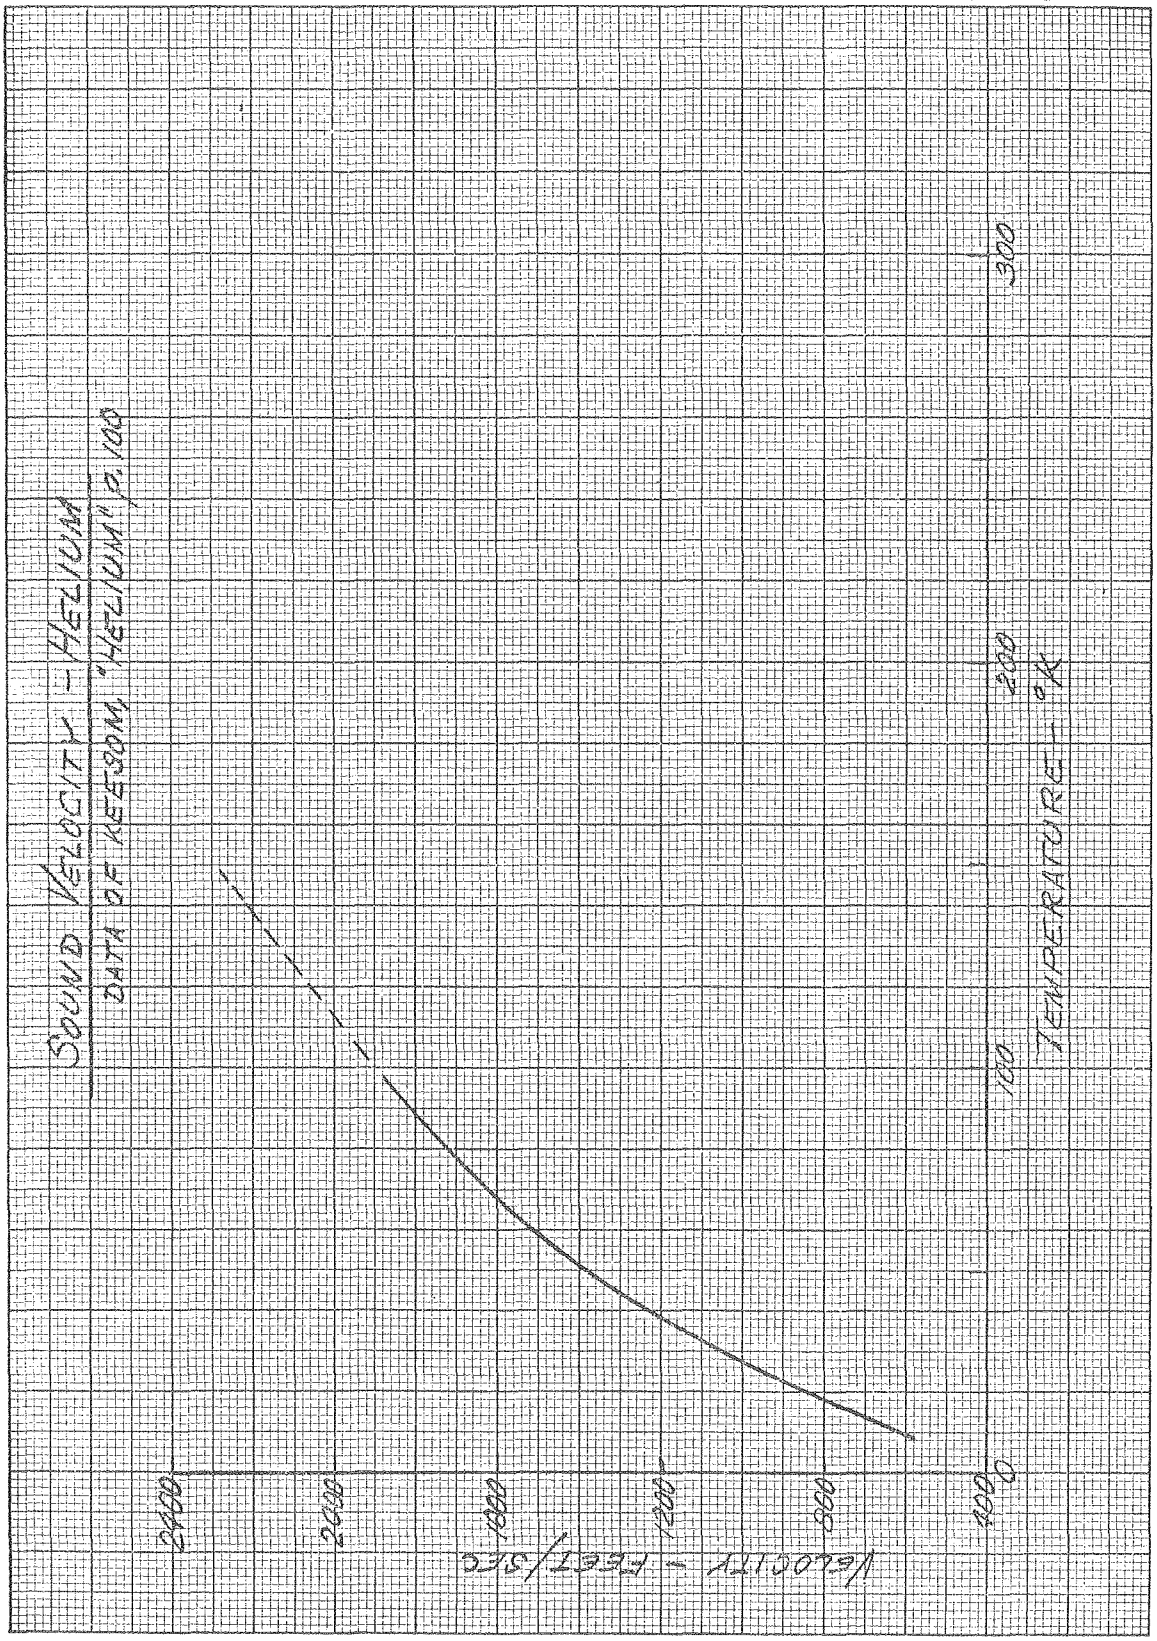
SOUND VELOCITY - HELIUM
DATA OF KEESOM, "HELIUM", p. 100
3000
2000
1000
0
VELOCITY - FEET/SEC
100
200
300
TEMPERATURE - °K

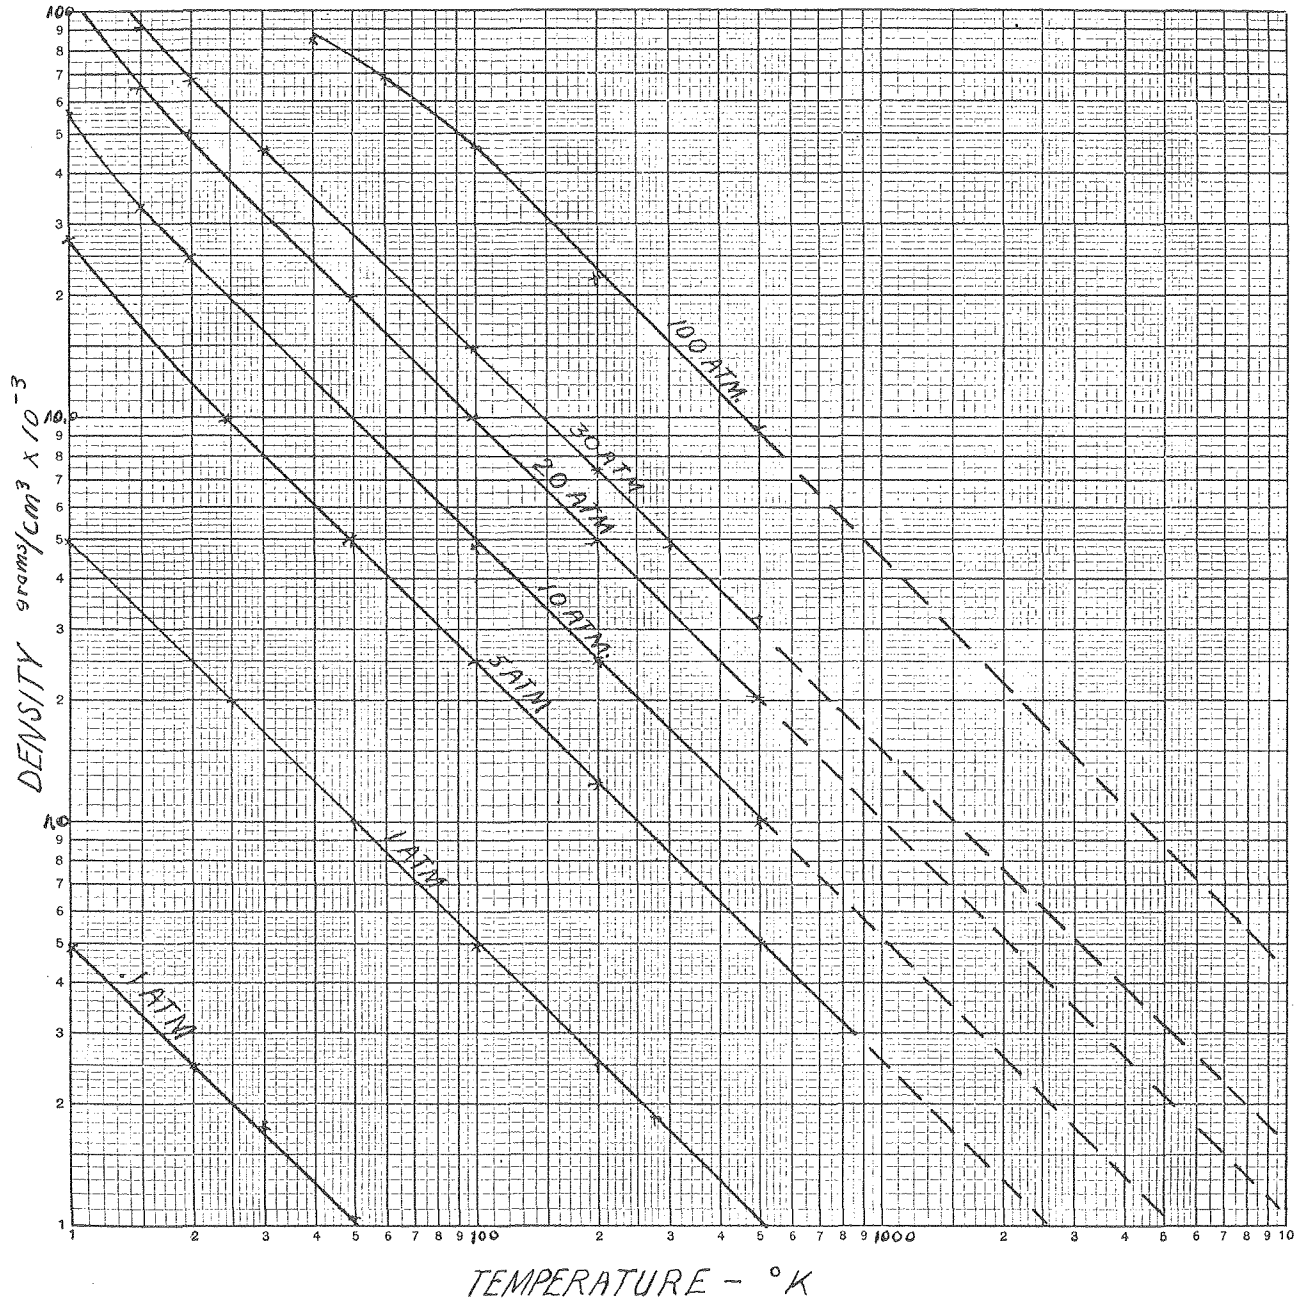

DENSITY OF GASEOUS HELIUM
from - " Institut International Du Froid "
(INTERNATIONAL INST. OF REF.)

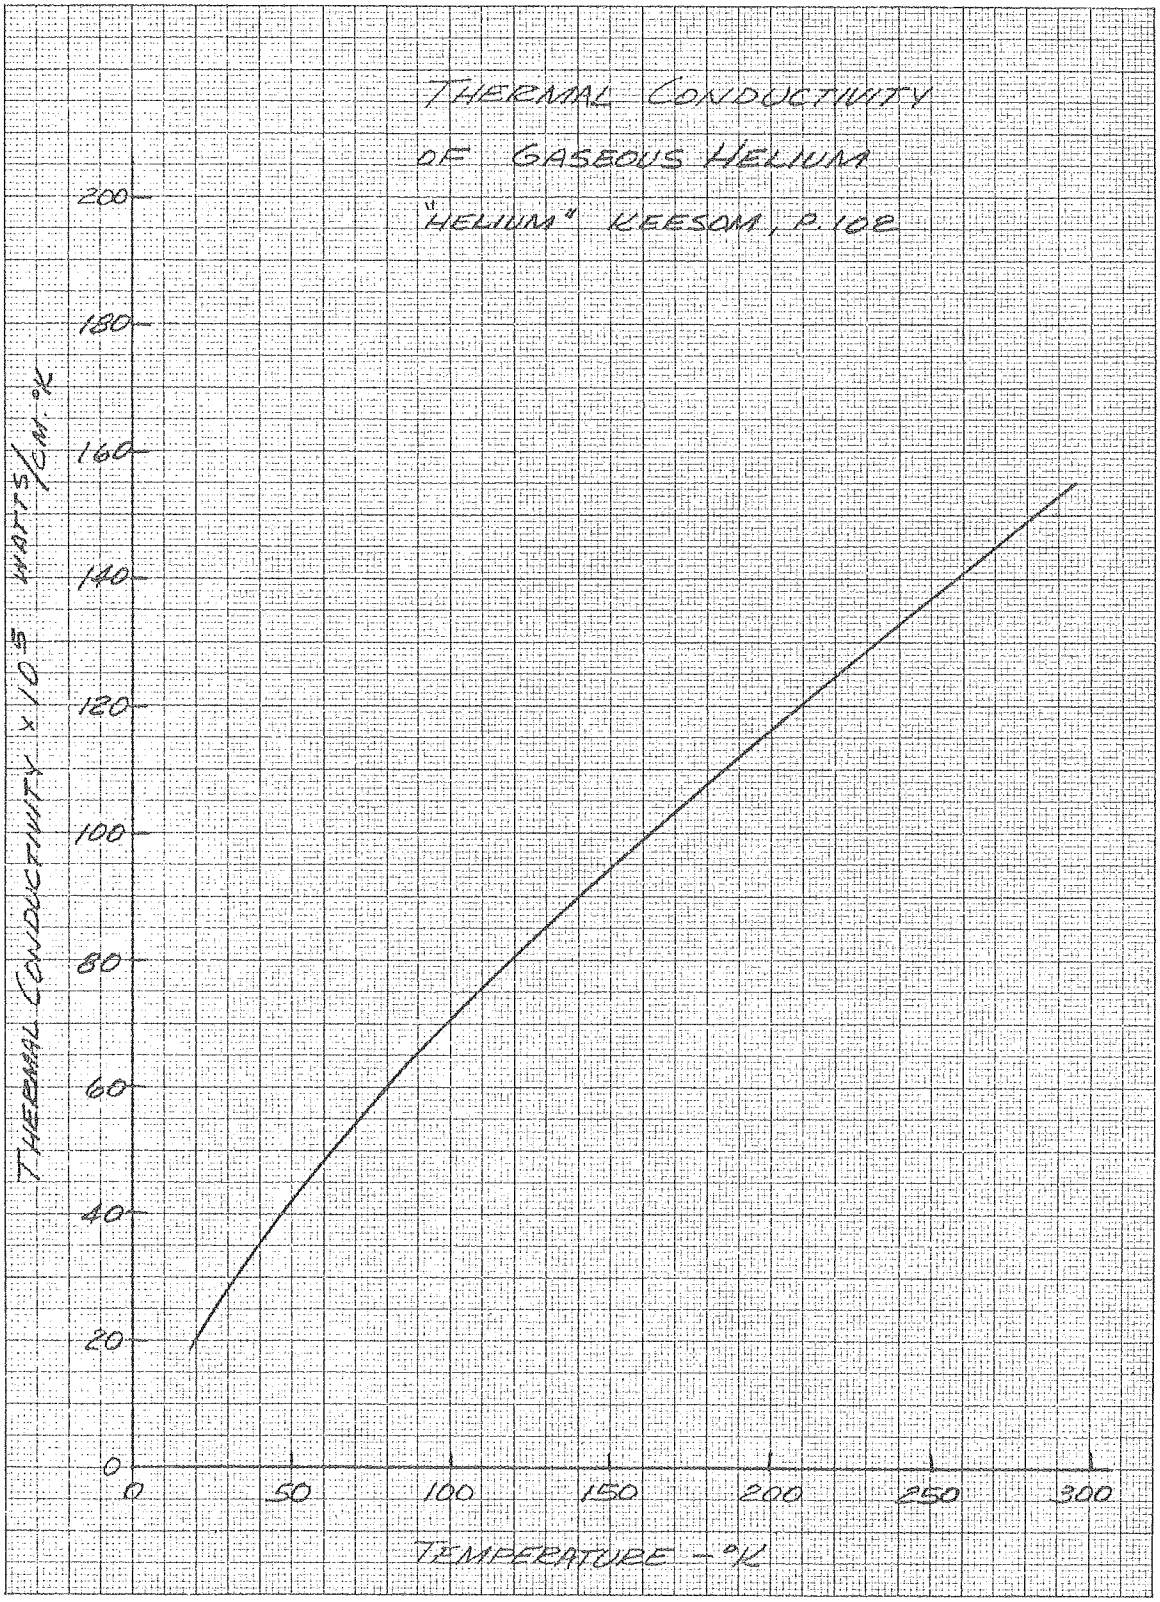
THERMAL CONDUCTIVITY
OF GASEOUS HELIUM
"HELIUM" KEESOM, P. 102
THERMAL CONDUCTIVITY x 10^-5 WATTS/CM.-°K
200
180
160
140
120
100
80
60
40
20
0
0
50
100
150
200
250
300
TEMPERATURE - °K

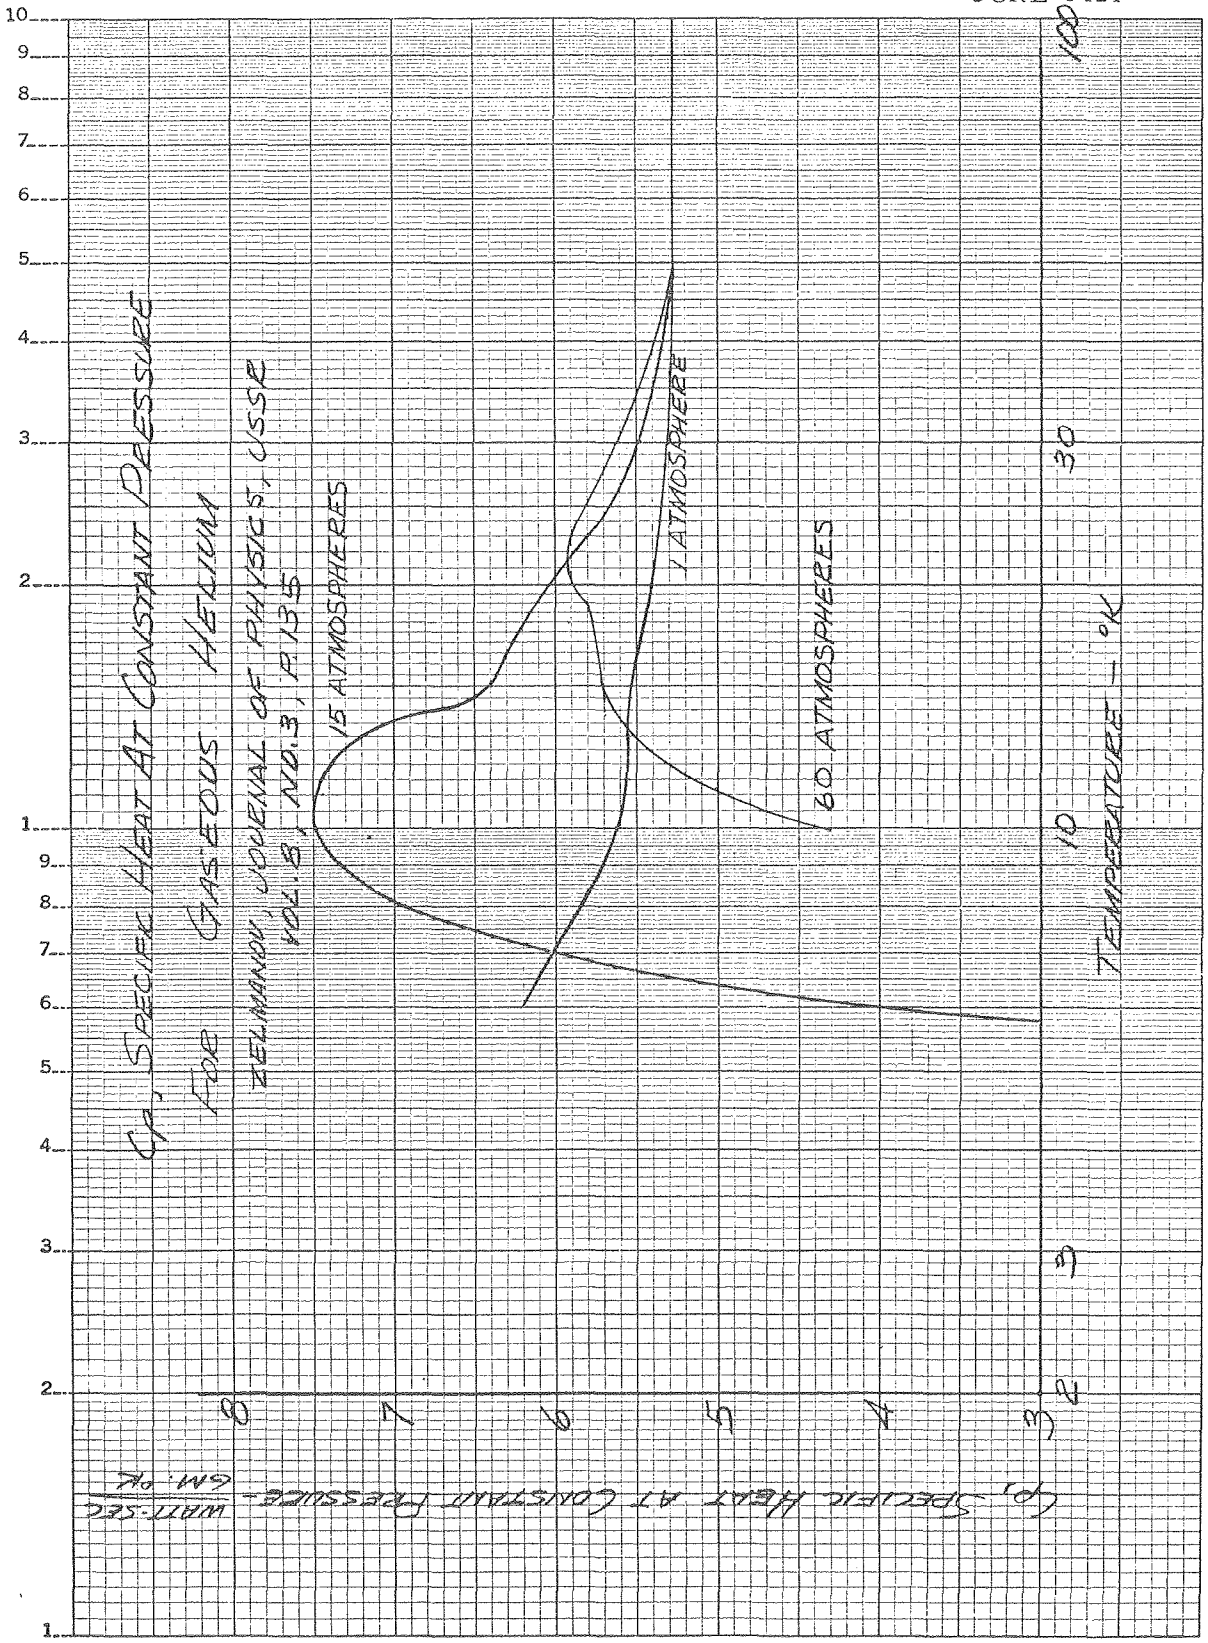
C_p, SPECIFIC HEAT AT CONSTANT PRESSURE
HELIUM
GASEOUS
FOR
ZELMANOV, JOURNAL OF PHYSICS, USSR
VOL. 13, NO. 3, P. 135
15 ATMOSPHERES
1 ATMOSPHERE
60 ATMOSPHERES
TEMPERATURE - °K
C_p, SPECIFIC HEAT AT CONSTANT PRESSURE - WATT-SEC / GM. °K

VISCOSITY OF GASEOUS HELIUM

"HELIUM", p. 108 - KEESOM

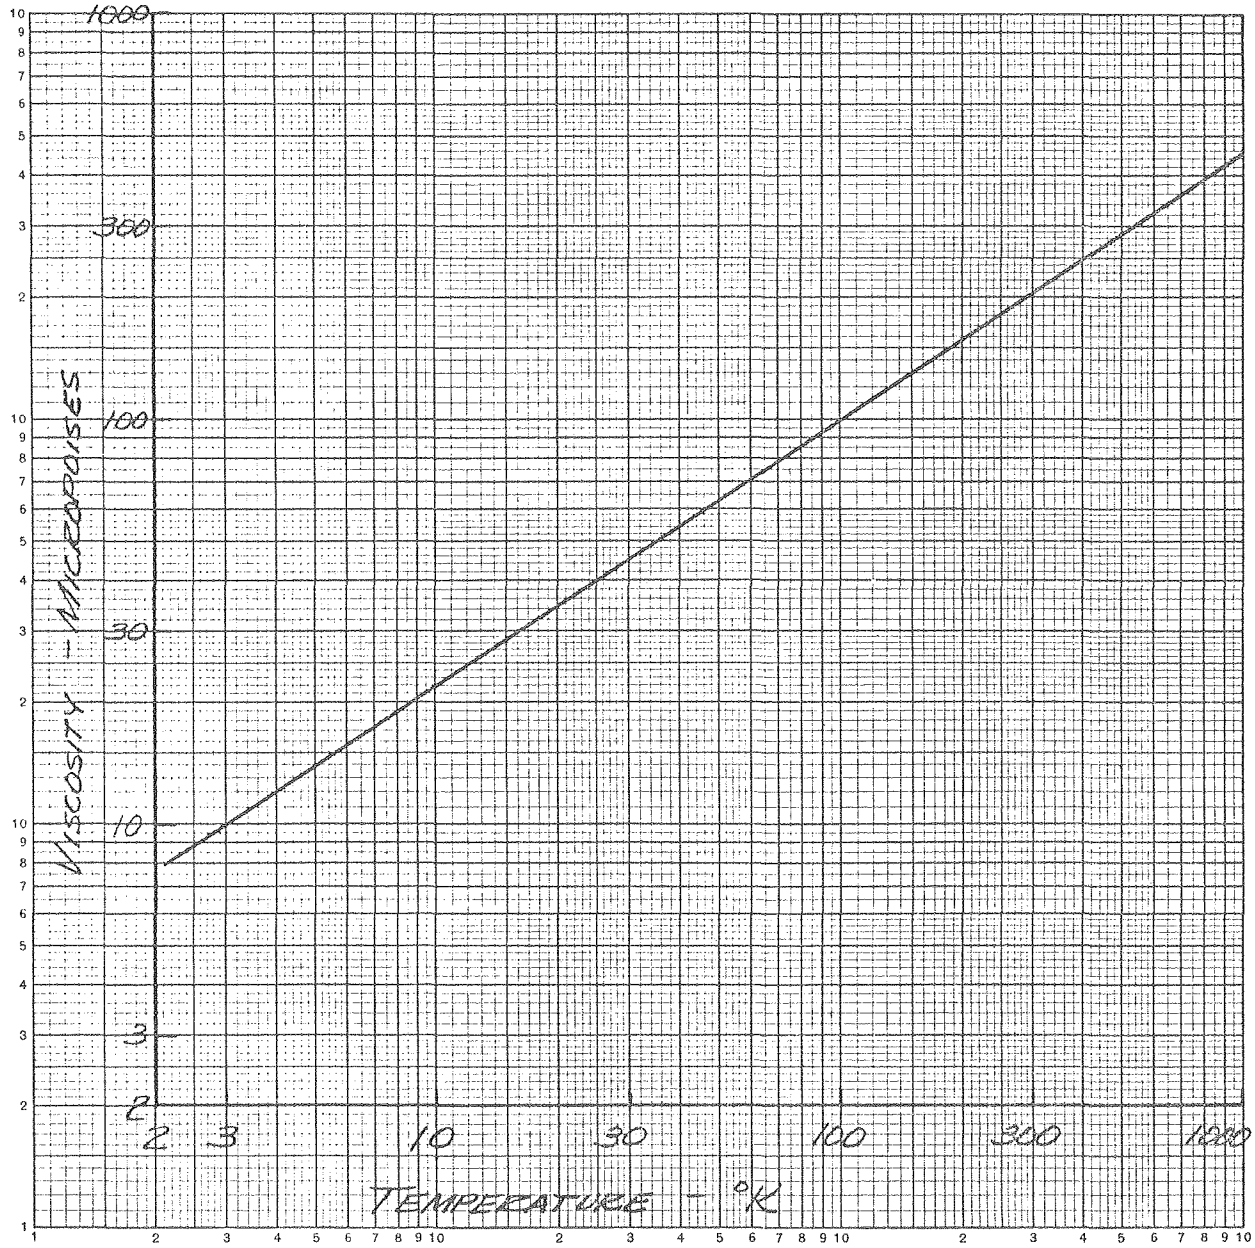

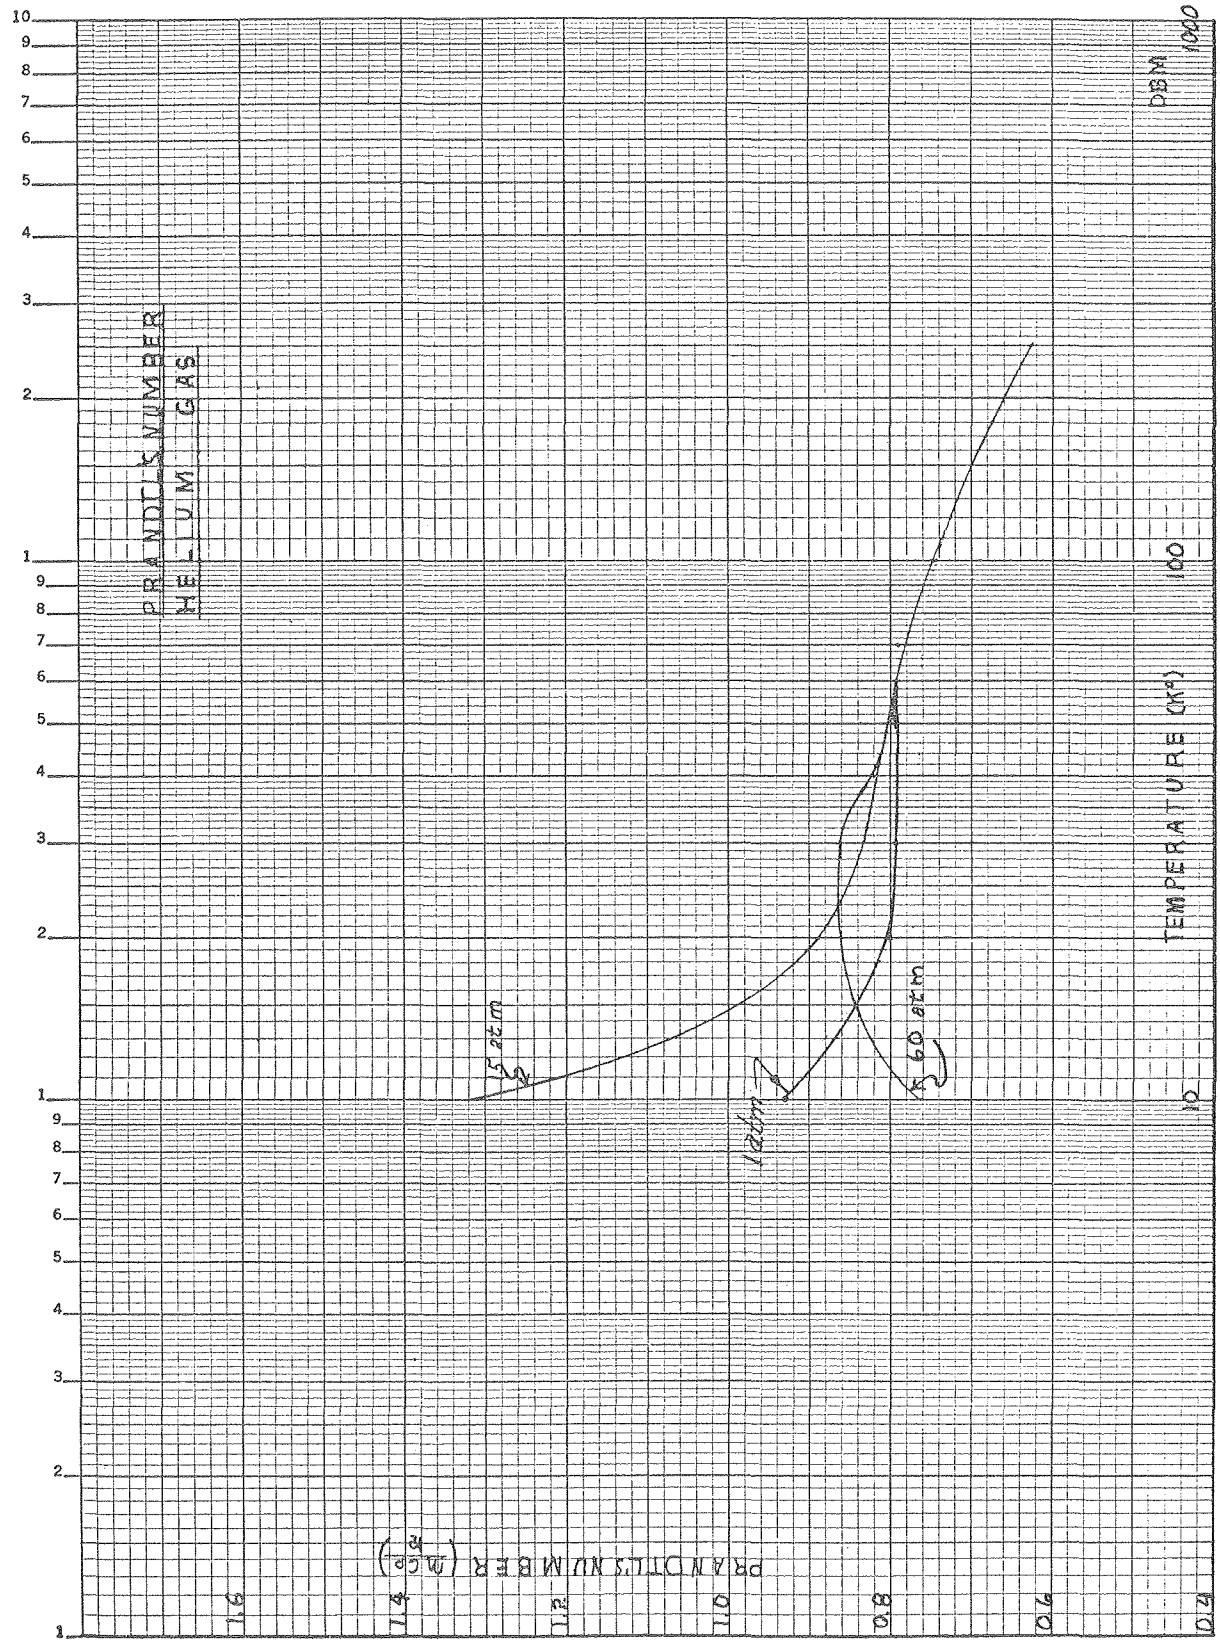
PRANDTL'S NUMBER
HELIUM GAS
TEMPERATURE (K°)
DBM
1000
100
10
15 atm
1 atm
60 atm
PRANDTL'S NUMBER
1.6
1.4
1.2
1.0
0.8
0.6
0.4

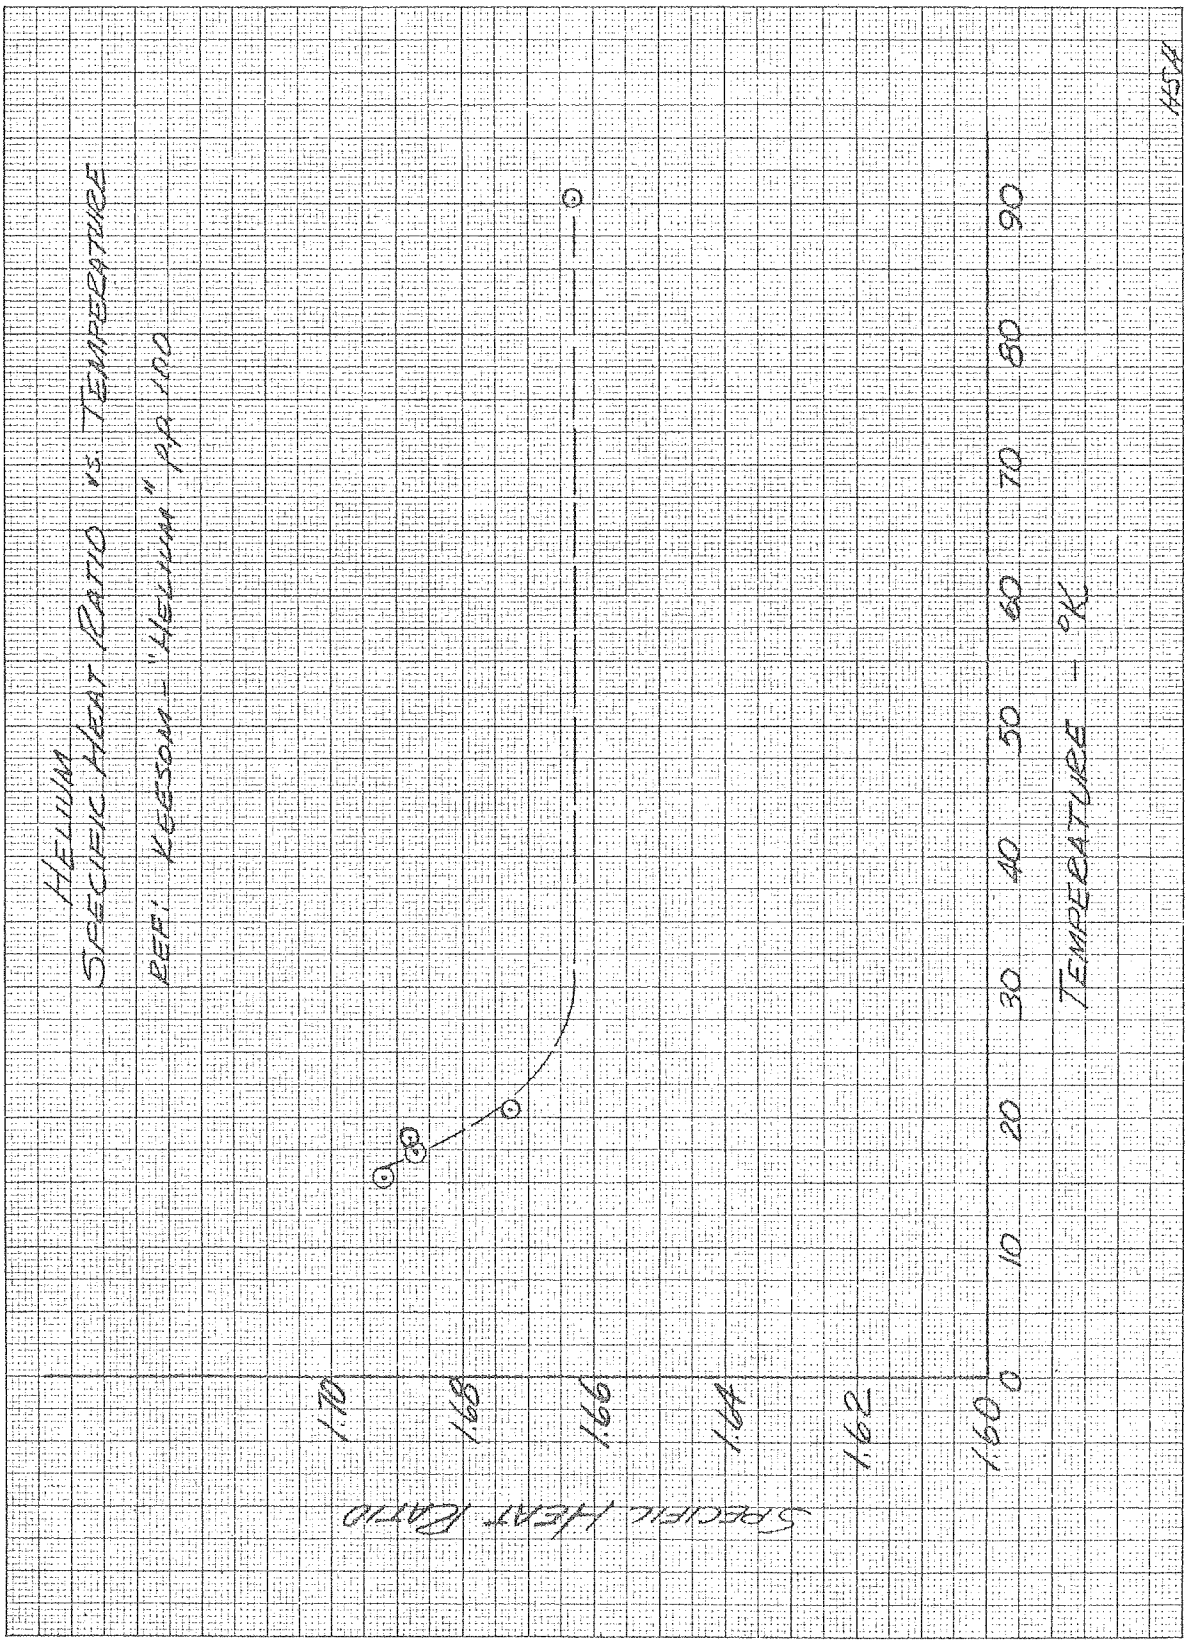
HELIUM
SPECIFIC HEAT RATIO VS. TEMPERATURE
REF: KEESOM - "HELIUM" PP 100
SPECIFIC HEAT RATIO
1.70
1.68
1.66
1.64
1.62
1.60
0
10
20
30
40
50
60
70
80
90
TEMPERATURE - °K

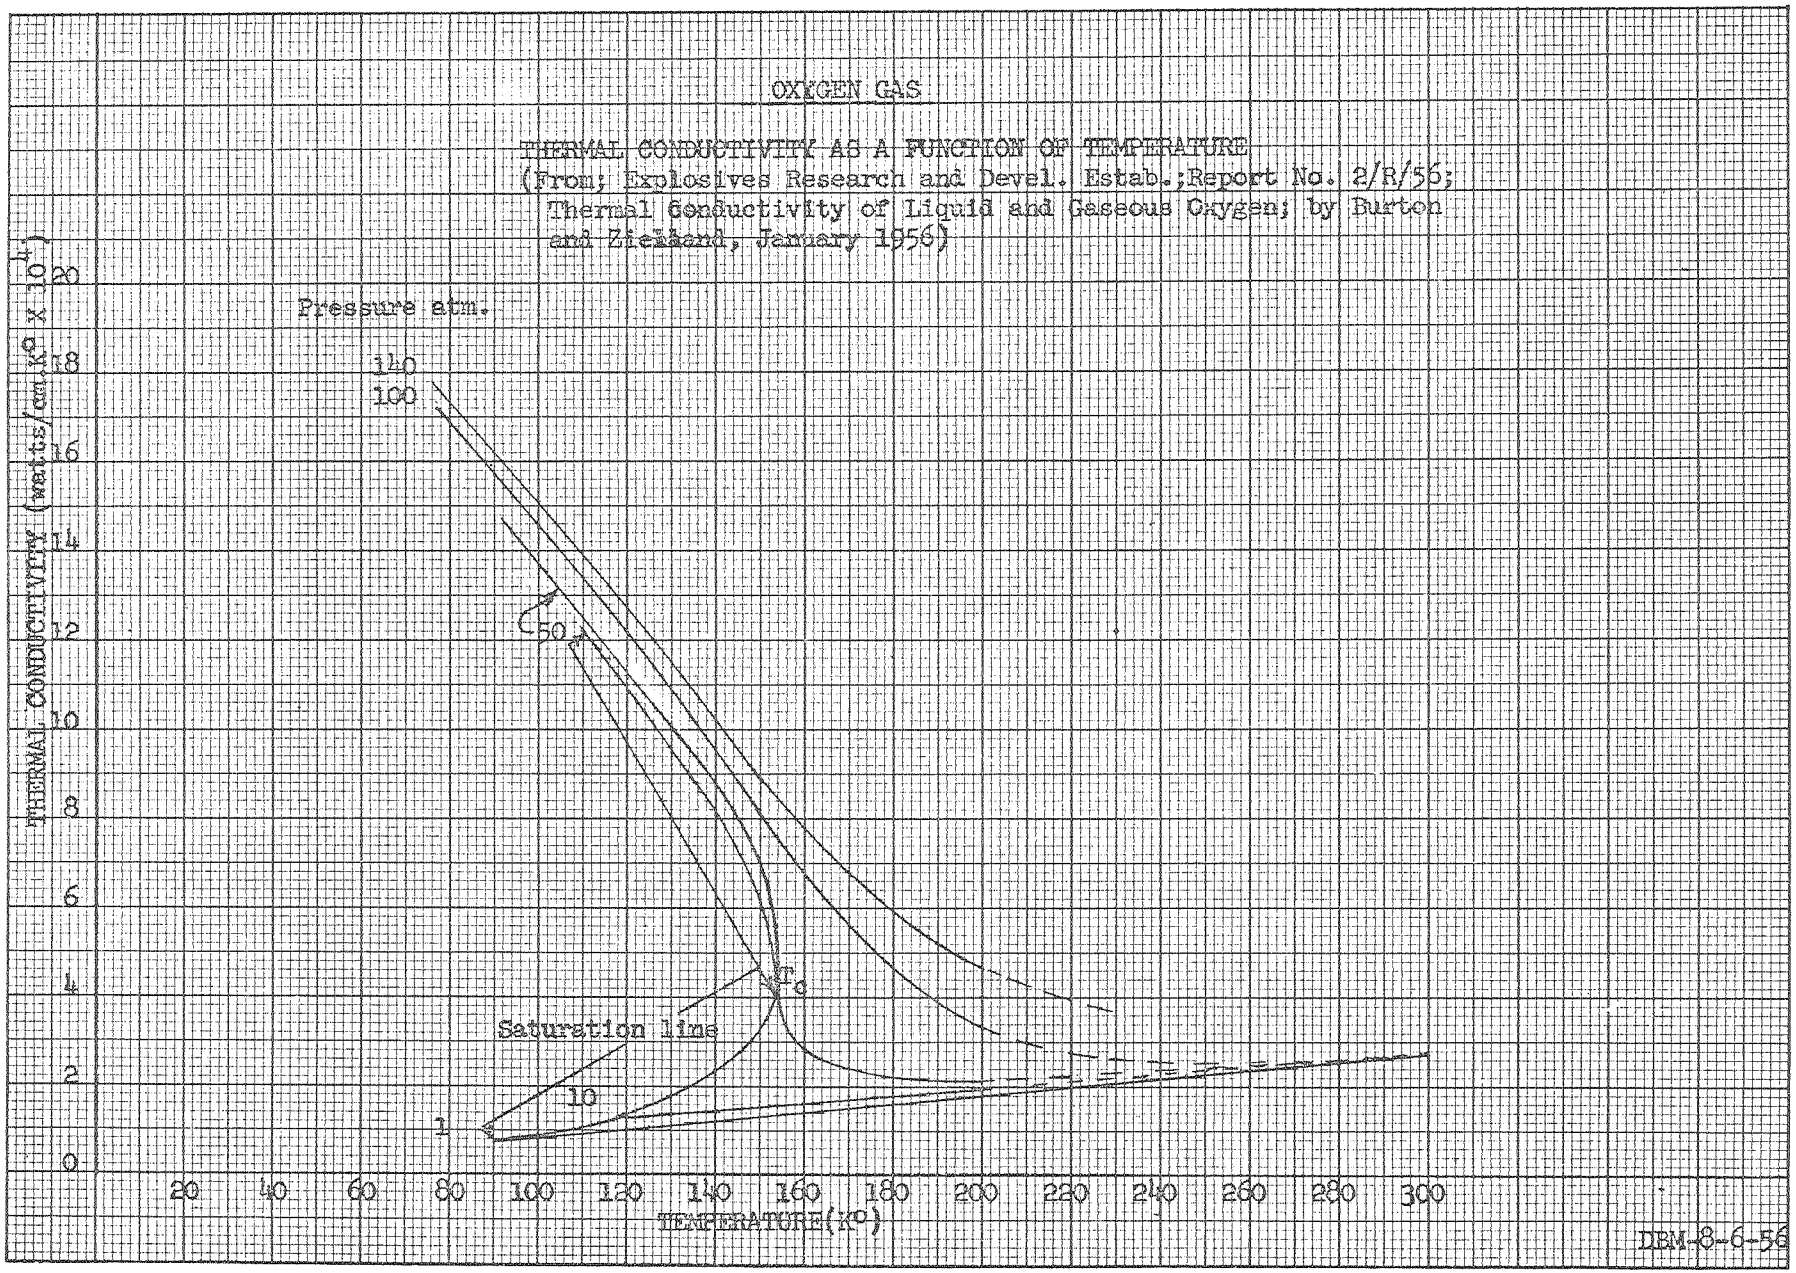
OXYGEN GAS
THERMAL CONDUCTIVITY AS A FUNCTION OF TEMPERATURE
(From; Explosives Research and Devel. Estab.;Report No. 2/R/56;
Thermal Conductivity of Liquid and Gaseous Oxygen; by Burton
and Zieldand, January 1956)
Pressure atm.
140
100
50
10
1
Saturation line
T_c
THERMAL CONDUCTIVITY (watts/cm.K° x 10⁻⁴)
0
2
4
6
8
10
12
14
16
18
20
20
40
60
80
100
120
140
160
180
200
220
240
260
280
300
TEMPERATURE(K°)
DBM-8-6-56

SPECIFIC HEAT

DATA: INT. CRITICAL TABLES, VOL. V - P.85
C_p OF ELEMENTS, GEN. ELECT. CO.

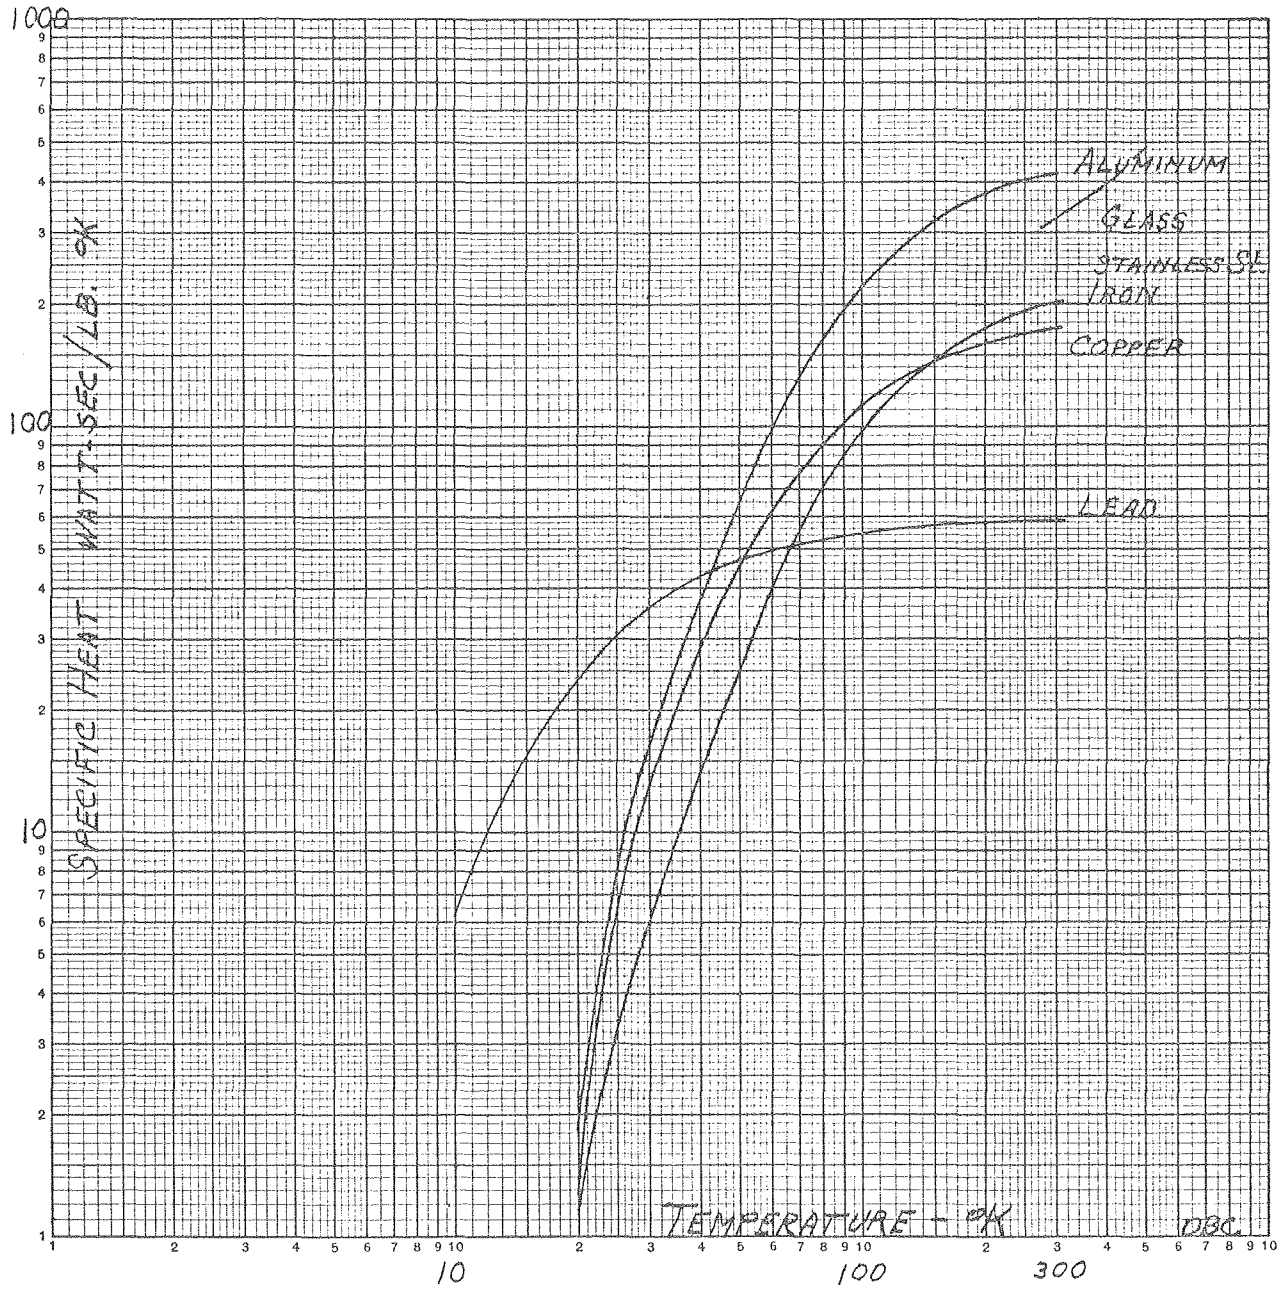

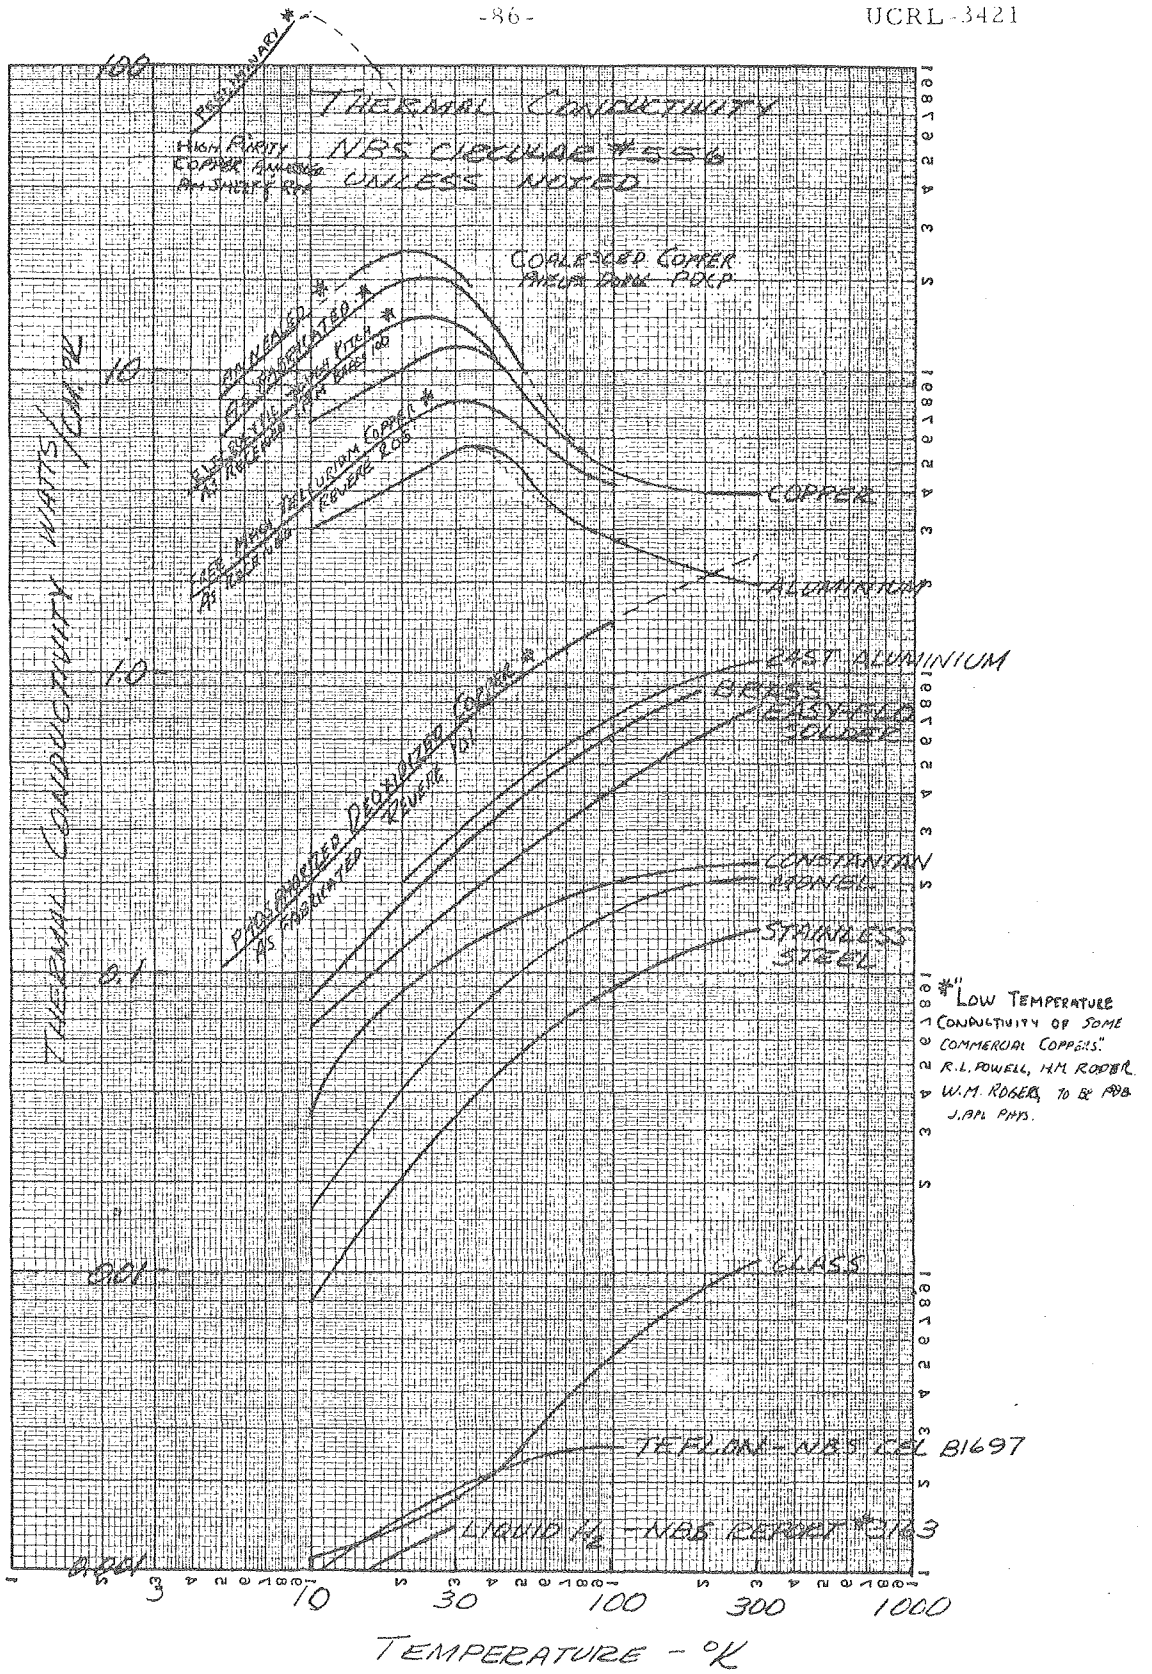

*"Low Temperature Conductivity of Some Commercial Coppers." R.L. Powell, H.M. Roder, W.M. Rogers, to be pub. J. Apl. Phys.

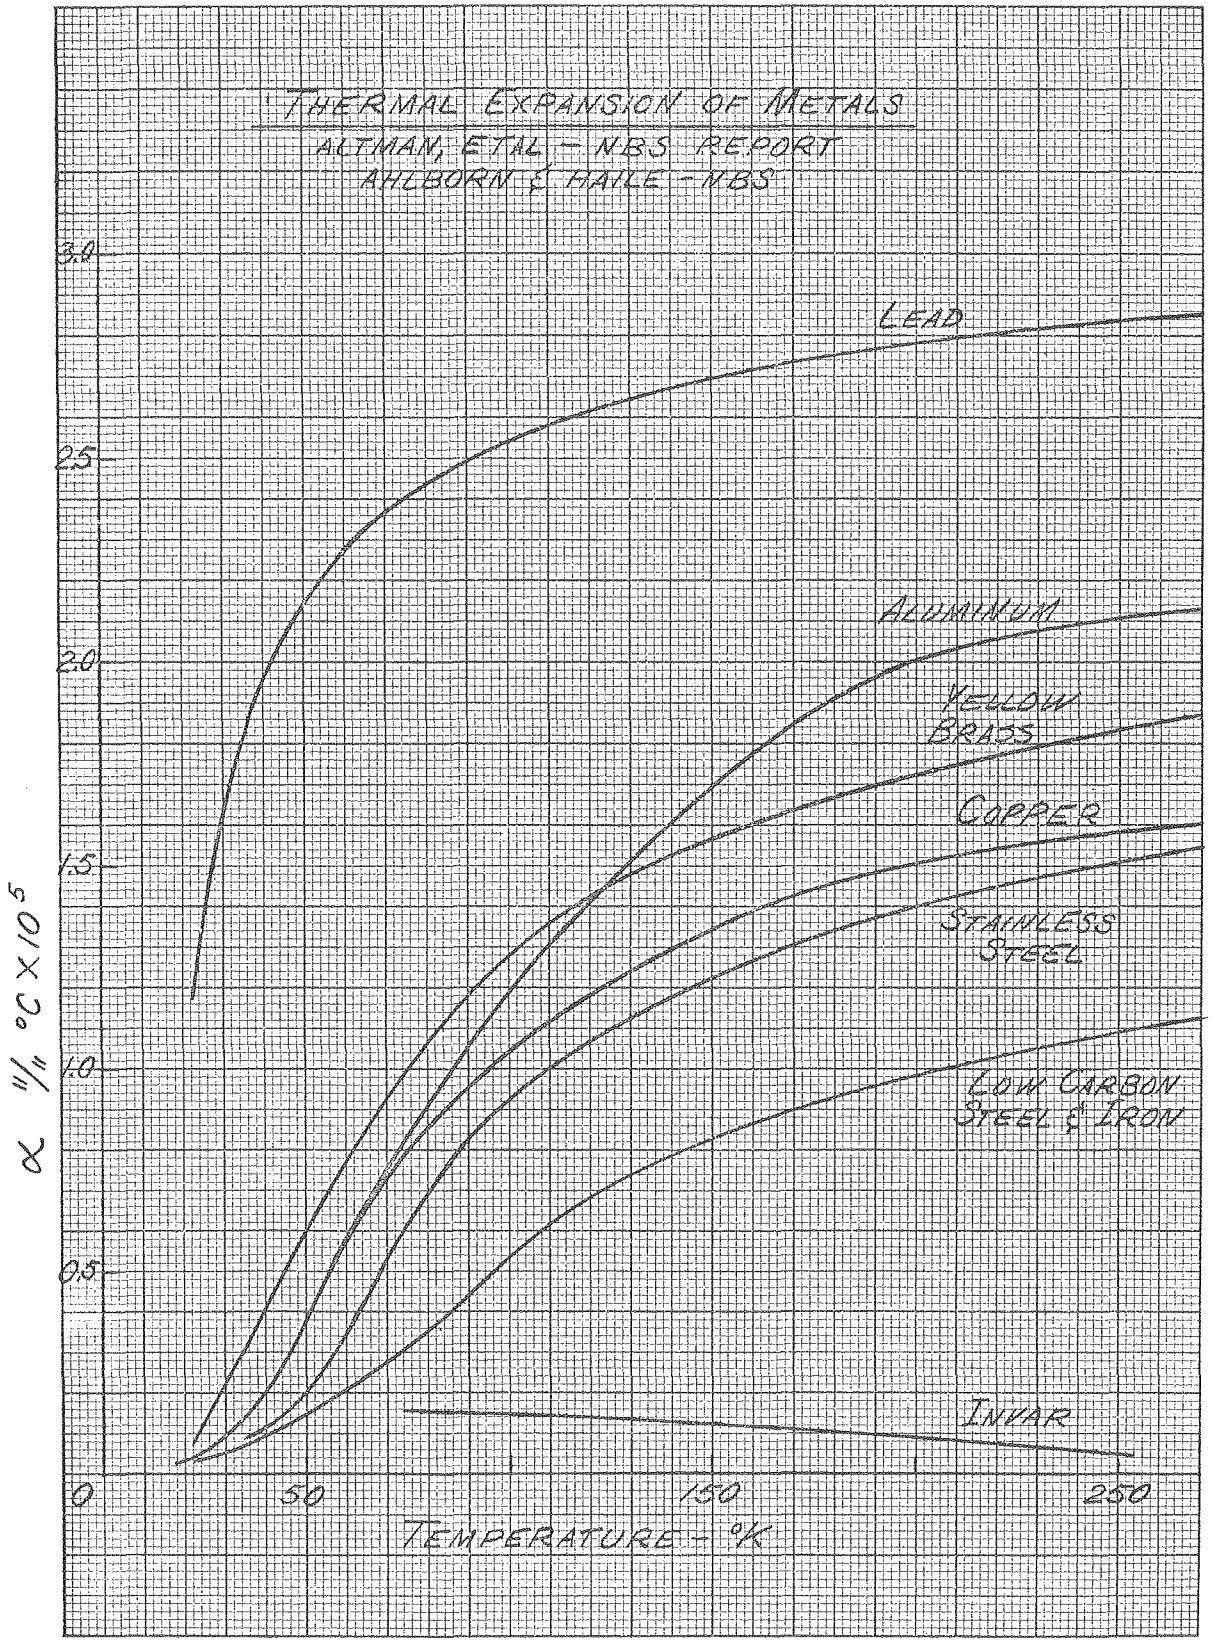
THERMAL EXPANSION OF METALS
ALTMAN, ETAL - NBS REPORT
AHLBORN & HAILE - NBS
3.0
2.5
2.0
1.5
1.0
0.5
0
50
150
250
TEMPERATURE - °K
α 1/1 °C X 10^5
LEAD
ALUMINUM
YELLOW BRASS
COPPER
STAINLESS STEEL
LOW CARBON STEEL & IRON
INVAR

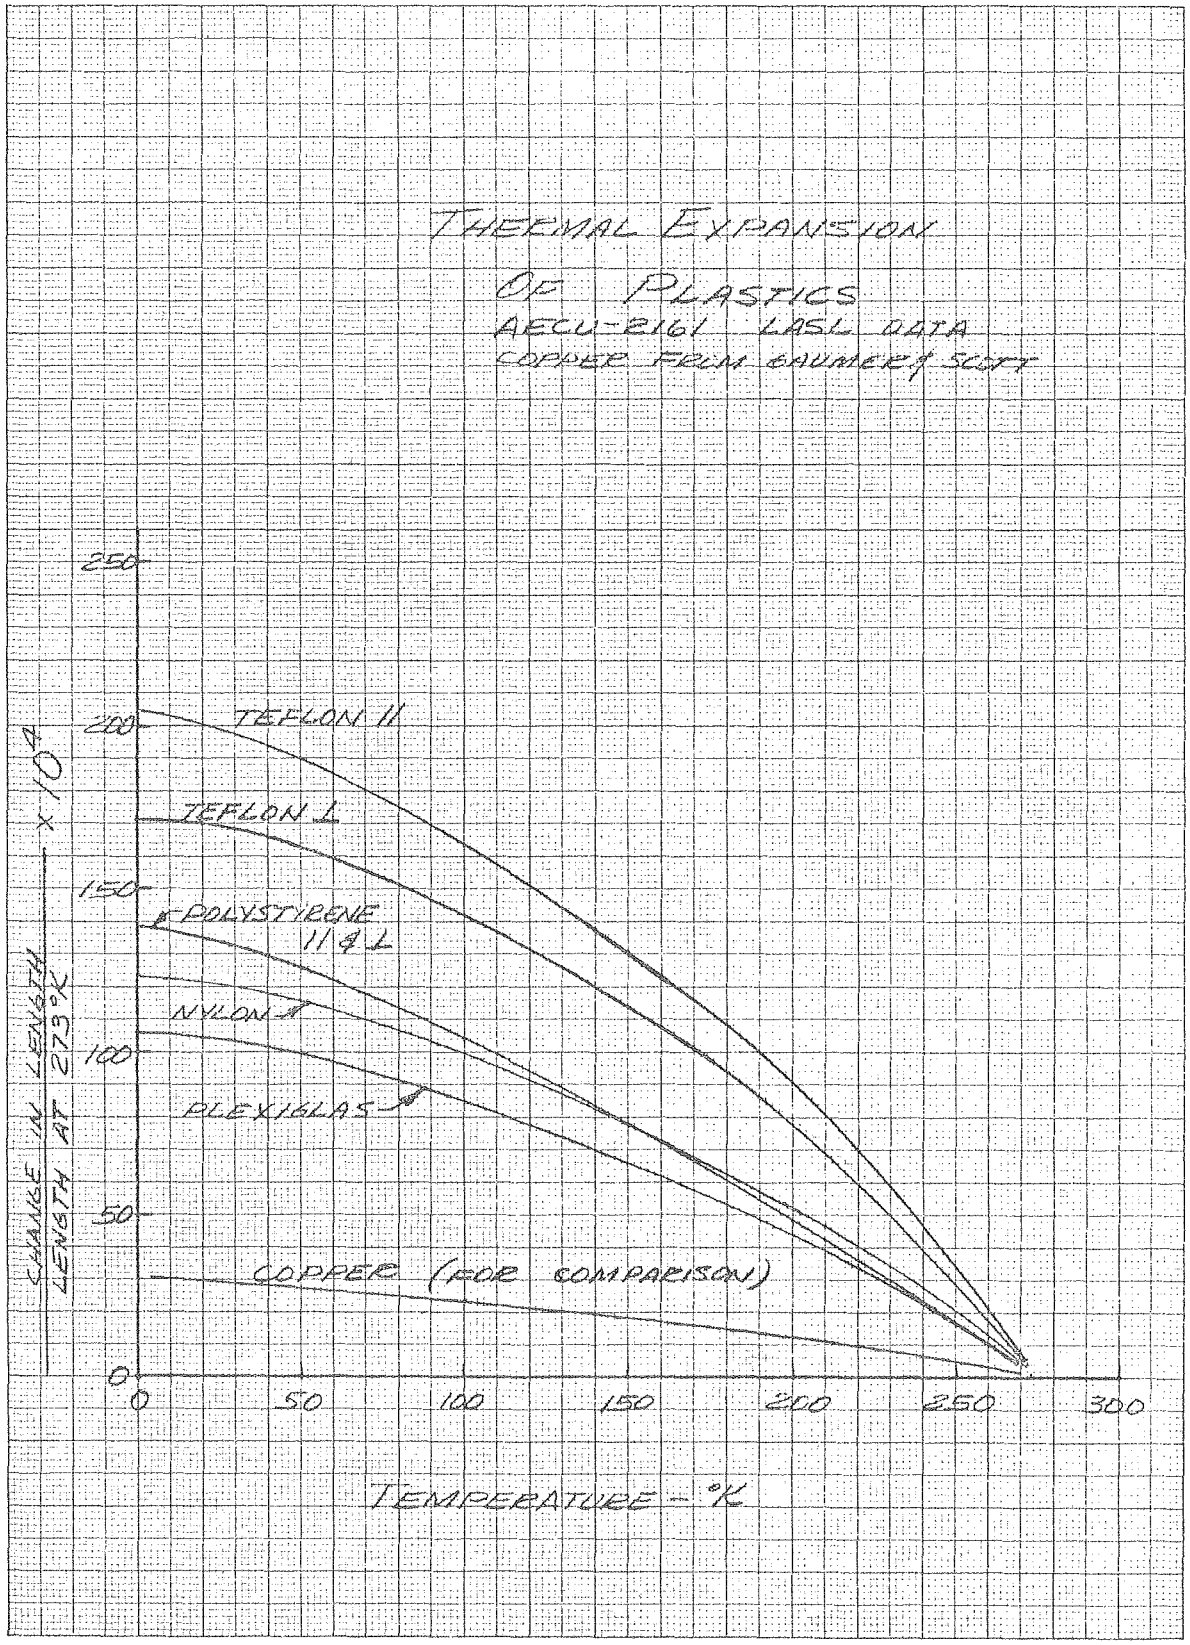
THERMAL EXPANSION
OF PLASTICS
AECU-2161 LASL DATA
COPPER FROM BAUMER & SCOTT
TEFLON ∥
TEFLON ⊥
POLYSTYRENE
∥ & ⊥
NYLON ⊥
PLEXIGLAS ⊥
COPPER (FOR COMPARISON)
CHANGE IN LENGTH / LENGTH AT 273°K × 10⁴
250
200
150
100
50
0
0
50
100
150
200
250
300
TEMPERATURE - °K

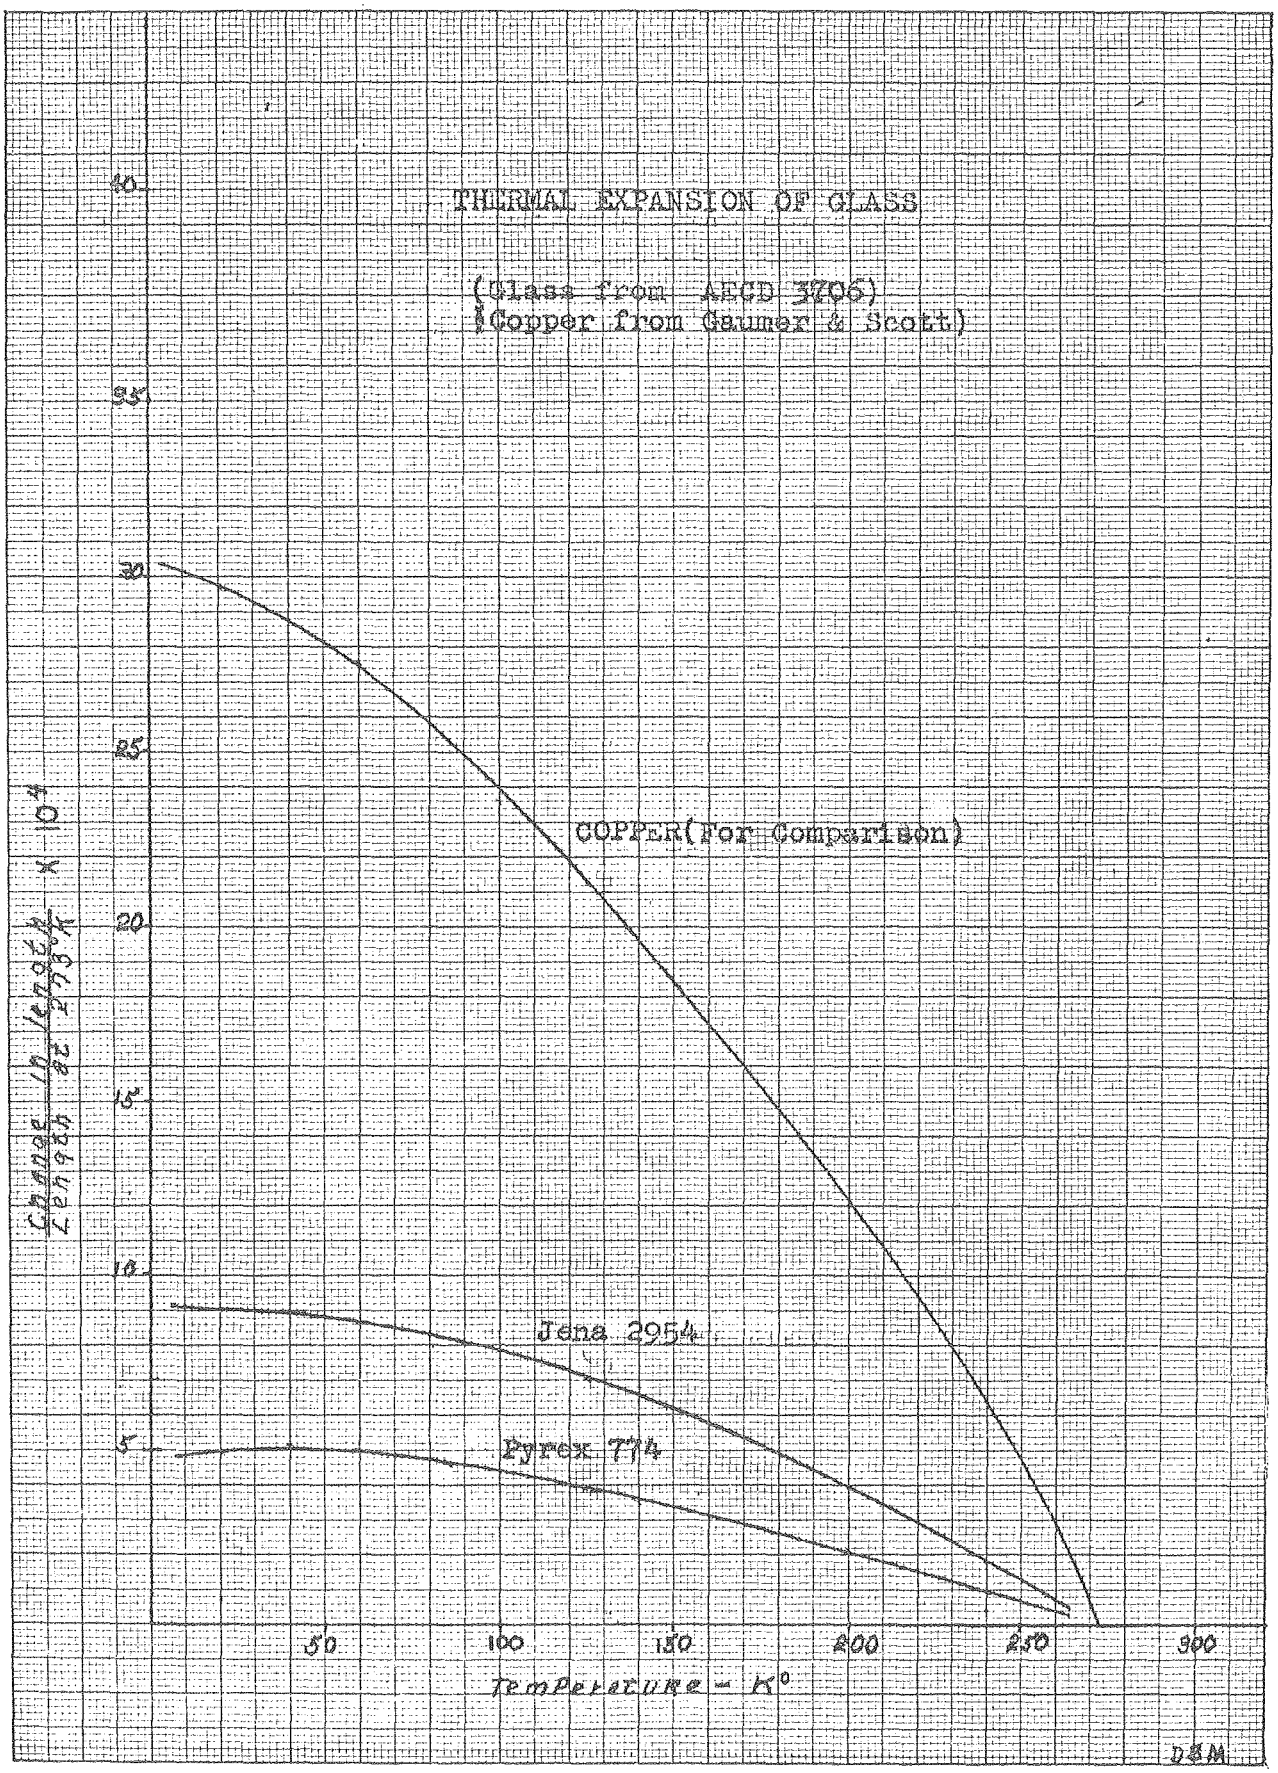
THERMAL EXPANSION OF GLASS
(Glass from AECD 3706)
(Copper from Gaumer & Scott)
COPPER(For Comparison)
Jena 2954
Pyrex 774
Temperature - K°
50
100
150
200
250
300
5
10
15
20
25
30
35
40
DSM

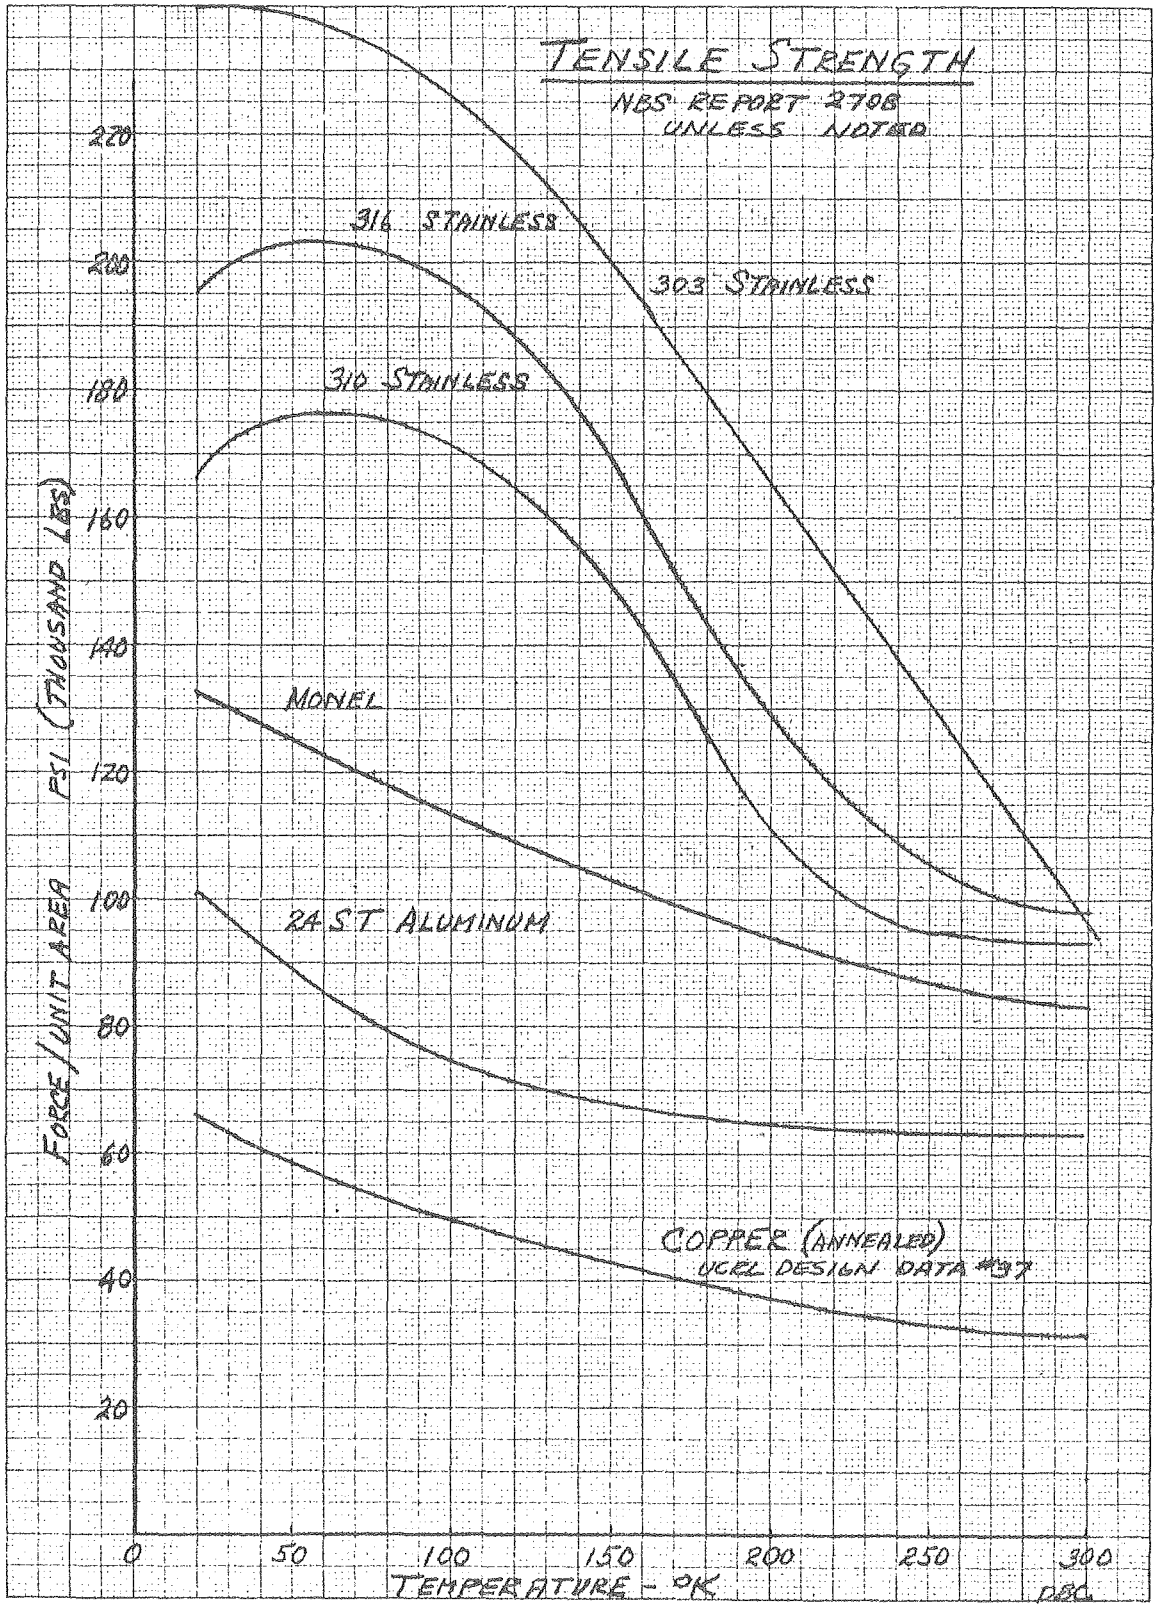
TENSILE STRENGTH
NBS REPORT 2708
UNLESS NOTED
316 STAINLESS
303 STAINLESS
310 STAINLESS
MONEL
24ST ALUMINUM
COPPER (ANNEALED)
UCRL DESIGN DATA #37
FORCE/UNIT AREA PSI (THOUSAND LBS)
220
200
180
160
140
120
100
80
60
40
20
0
50
100
150
200
250
300
TEMPERATURE - °K

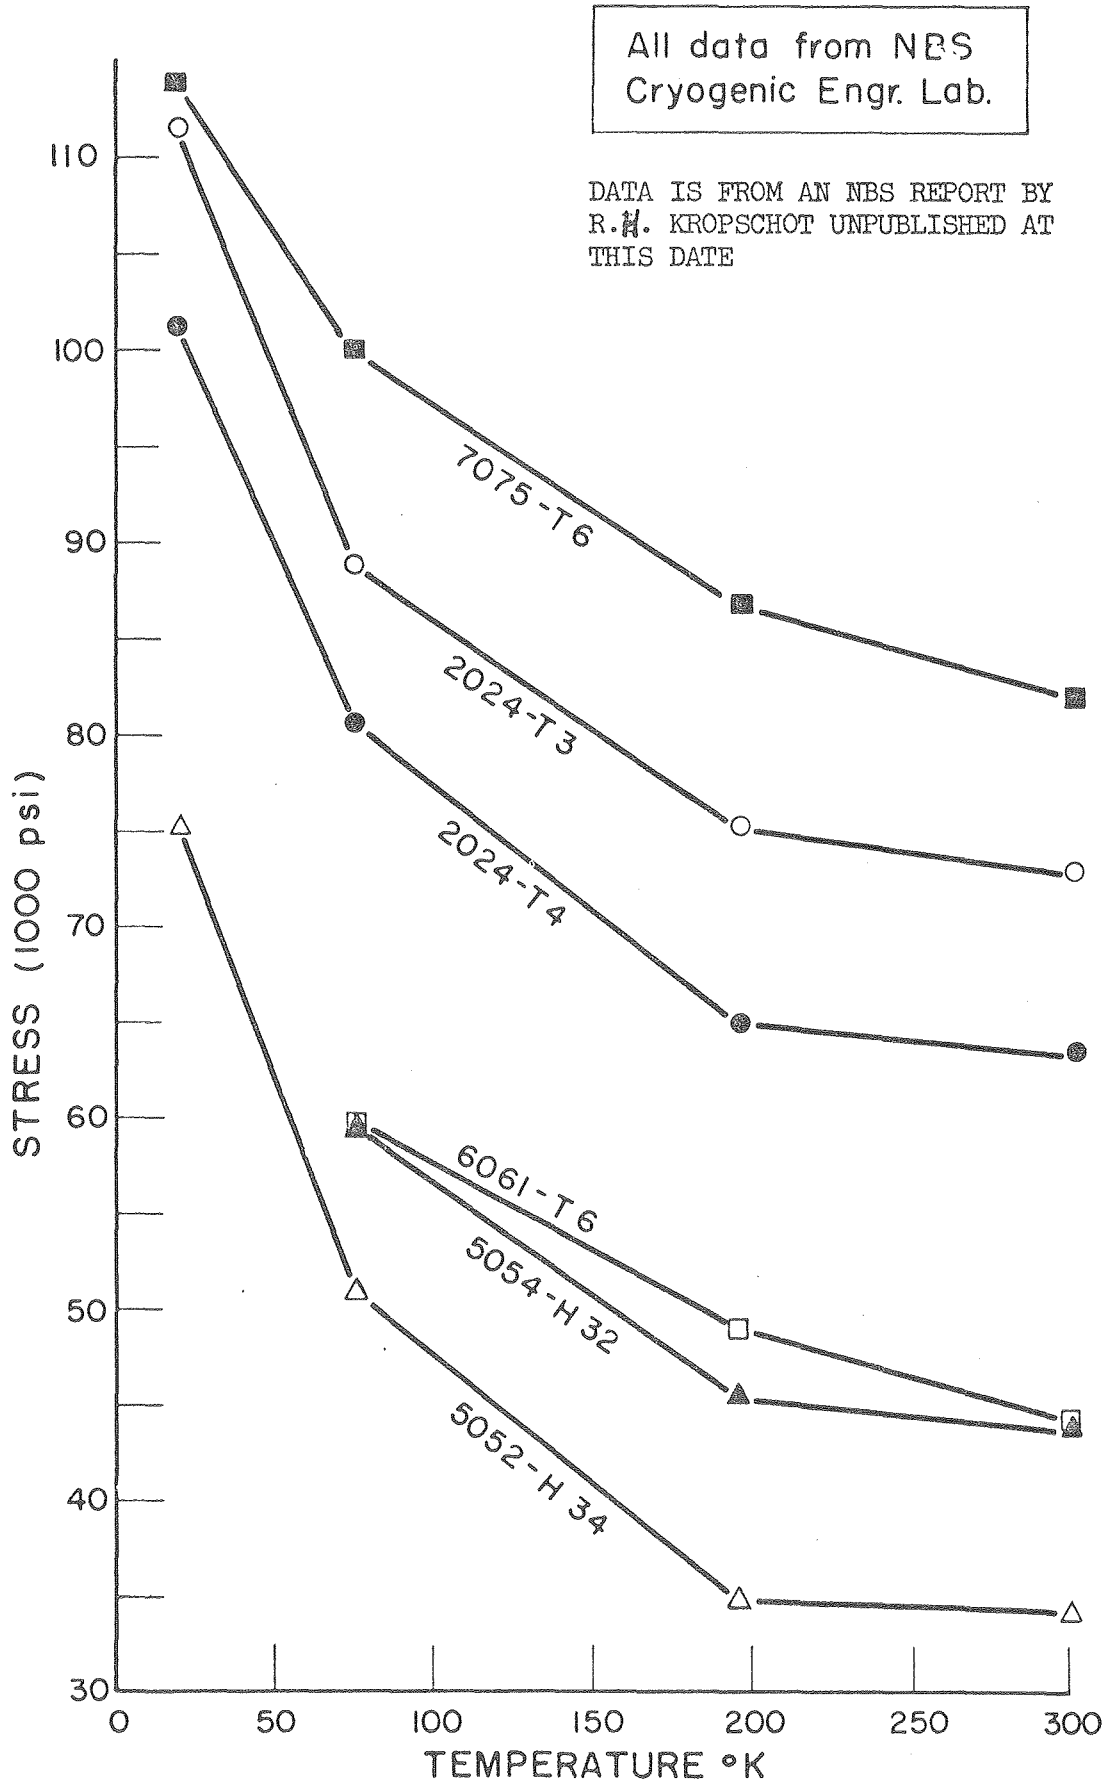

TENSILE STRENGTH OF ALUMINUM ALLOYS

DATA IS FROM A NBS REPRORT BY R.H. Kropschot
UNPUBLISHED AS OF THIS DATE

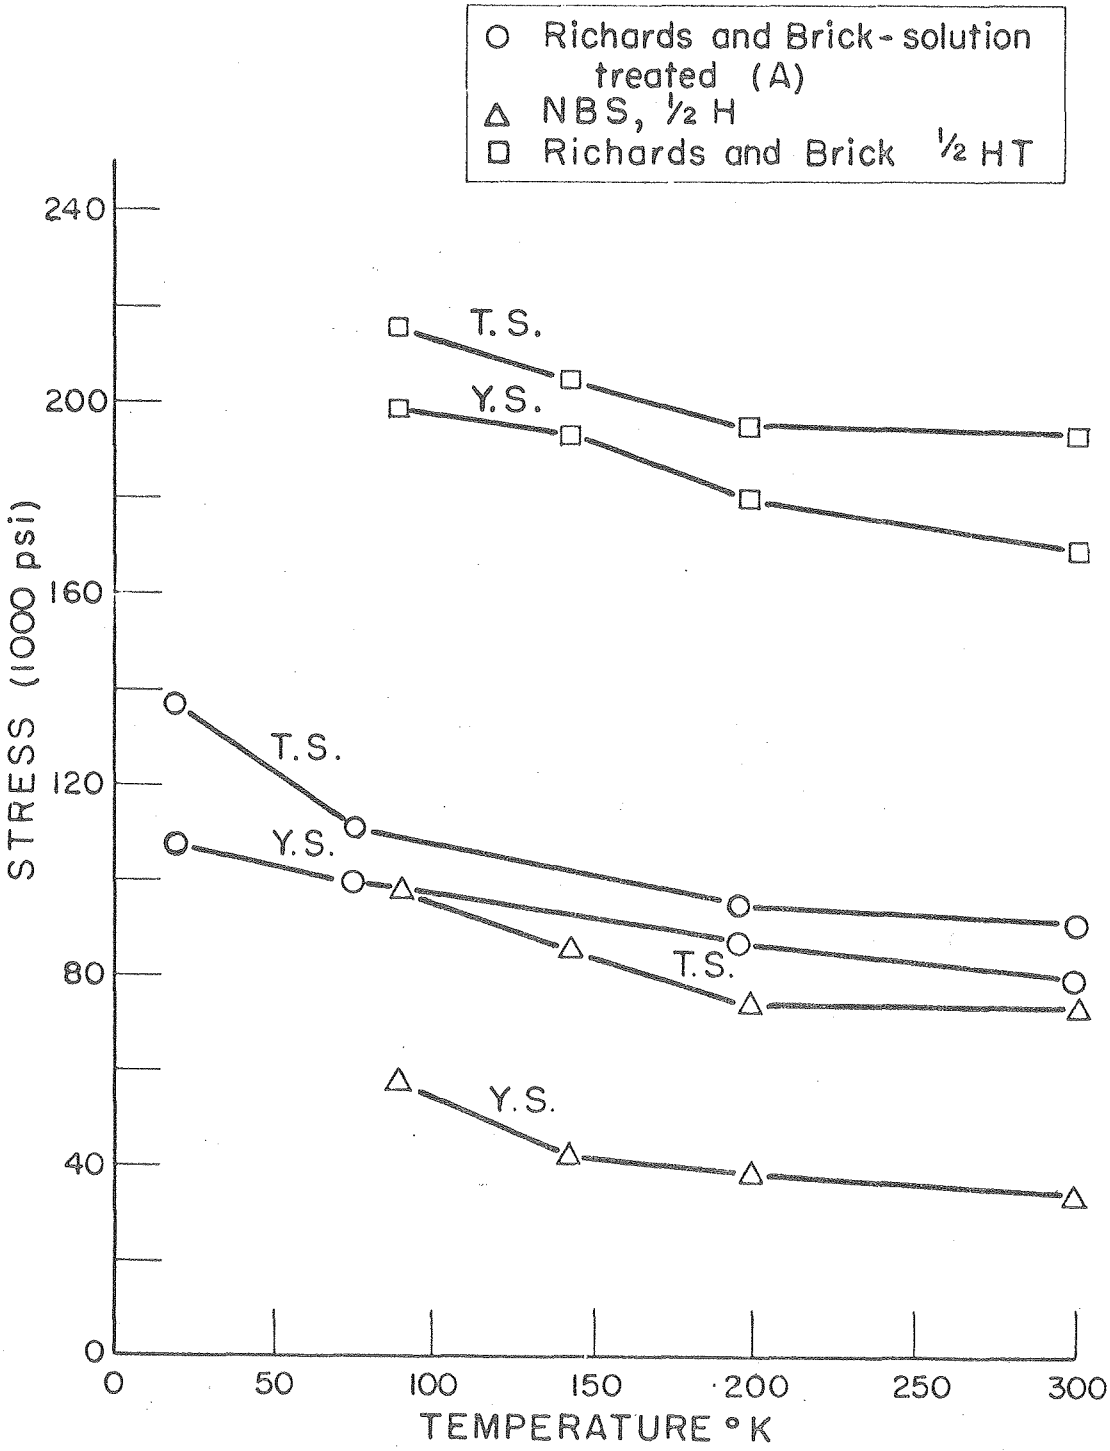

TENSILE AND YIELD STRENGTH
OF
BERYLLIUM COPPER (BERYLCO 25)

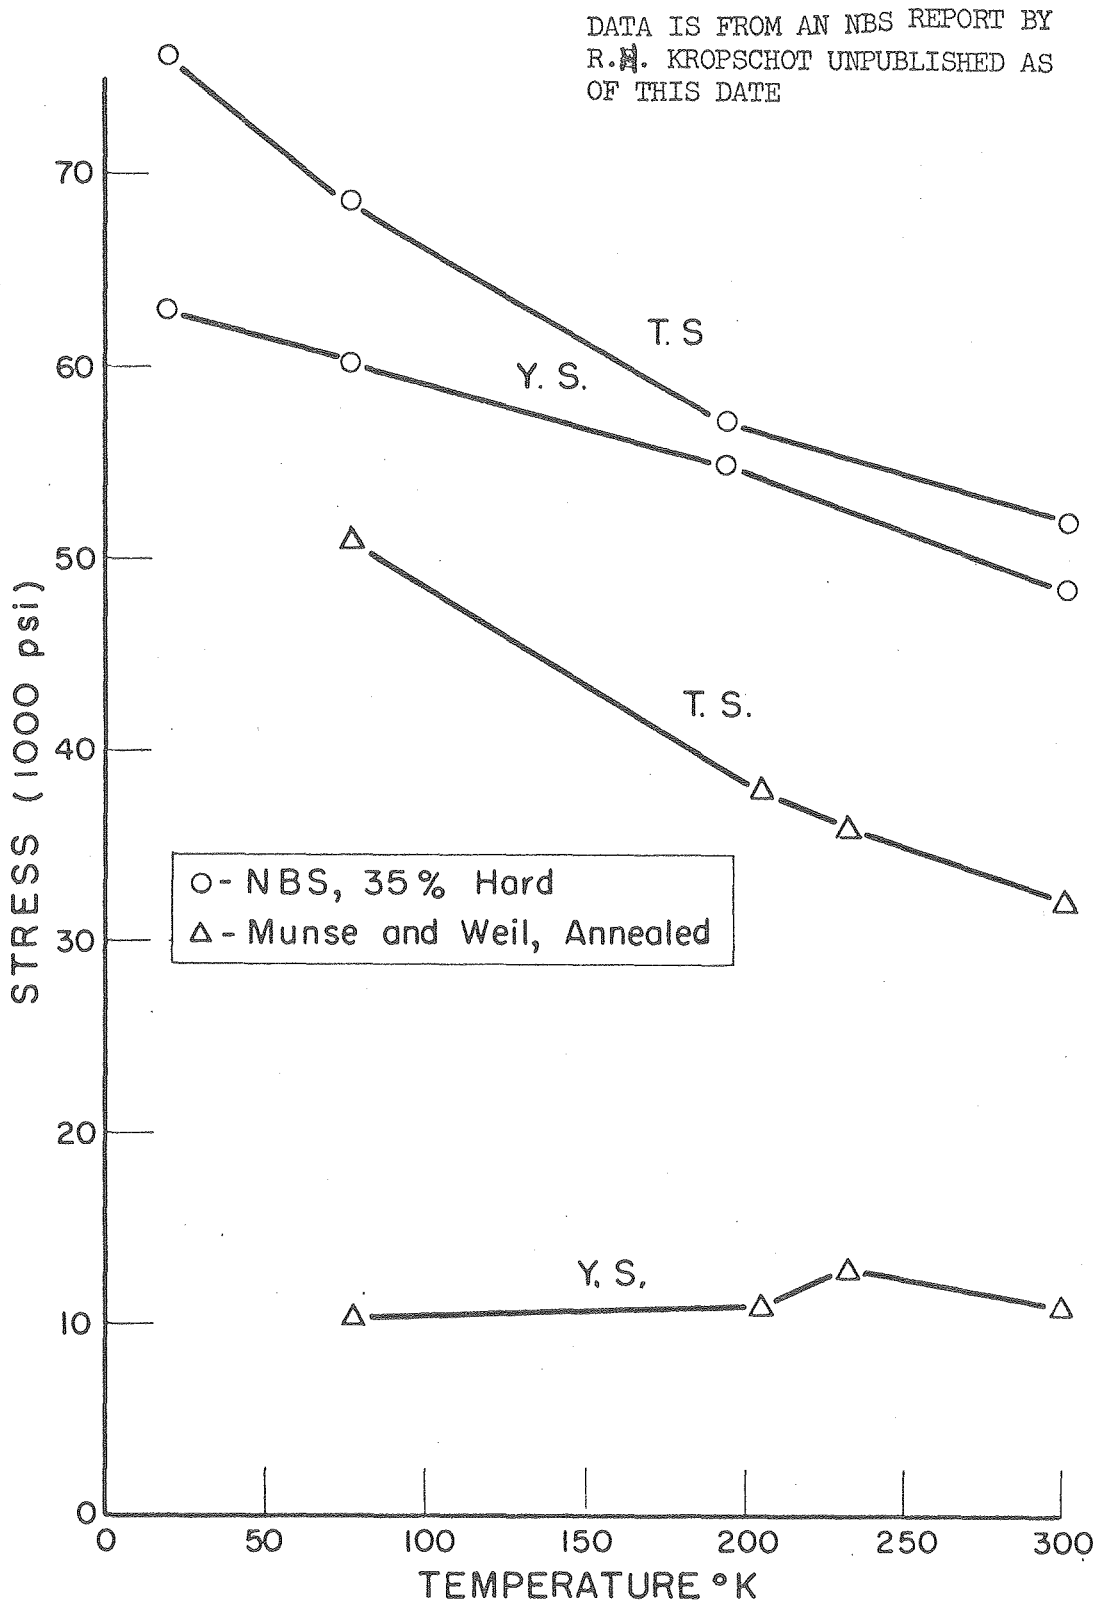

TENSILE AND YIELD STRENGH
OF
O.F.H.C. COPPER

DATA IS FROM AN NBS REPORT BY R.H. KROPSCHOT
UNPUBLISHED AS OF THIS DATE

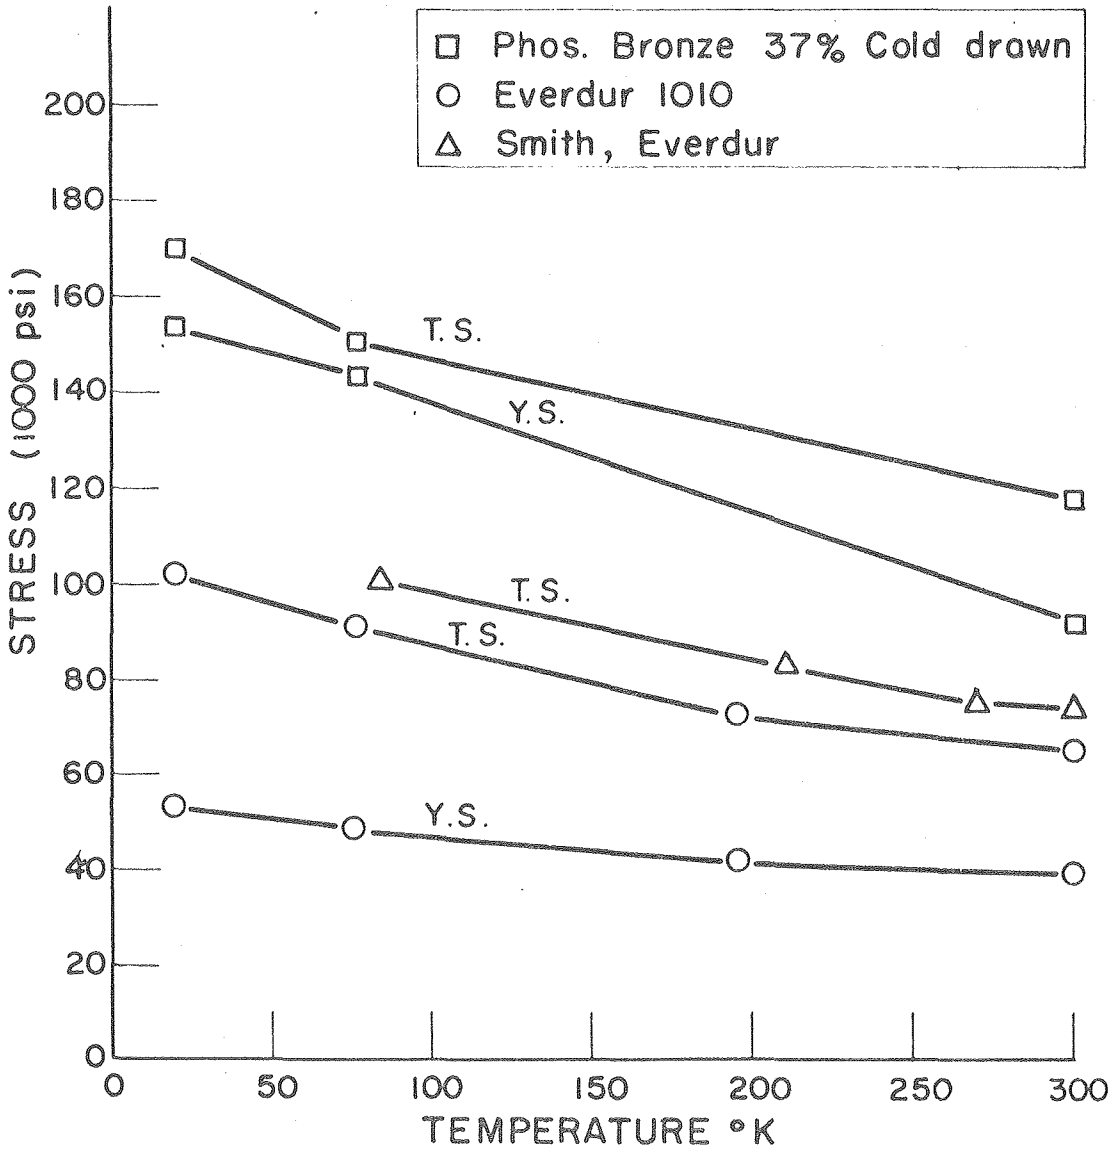

TENSILE AND YIELD STRENGTH
OF
EVERDUR AND PHOSPHOR BRONZE ASTM B-139

DATA IS FROM AN NBS REPORT BY
R. H. KROPSCHOT UNPUBLISHED AS OF
THIS DATE

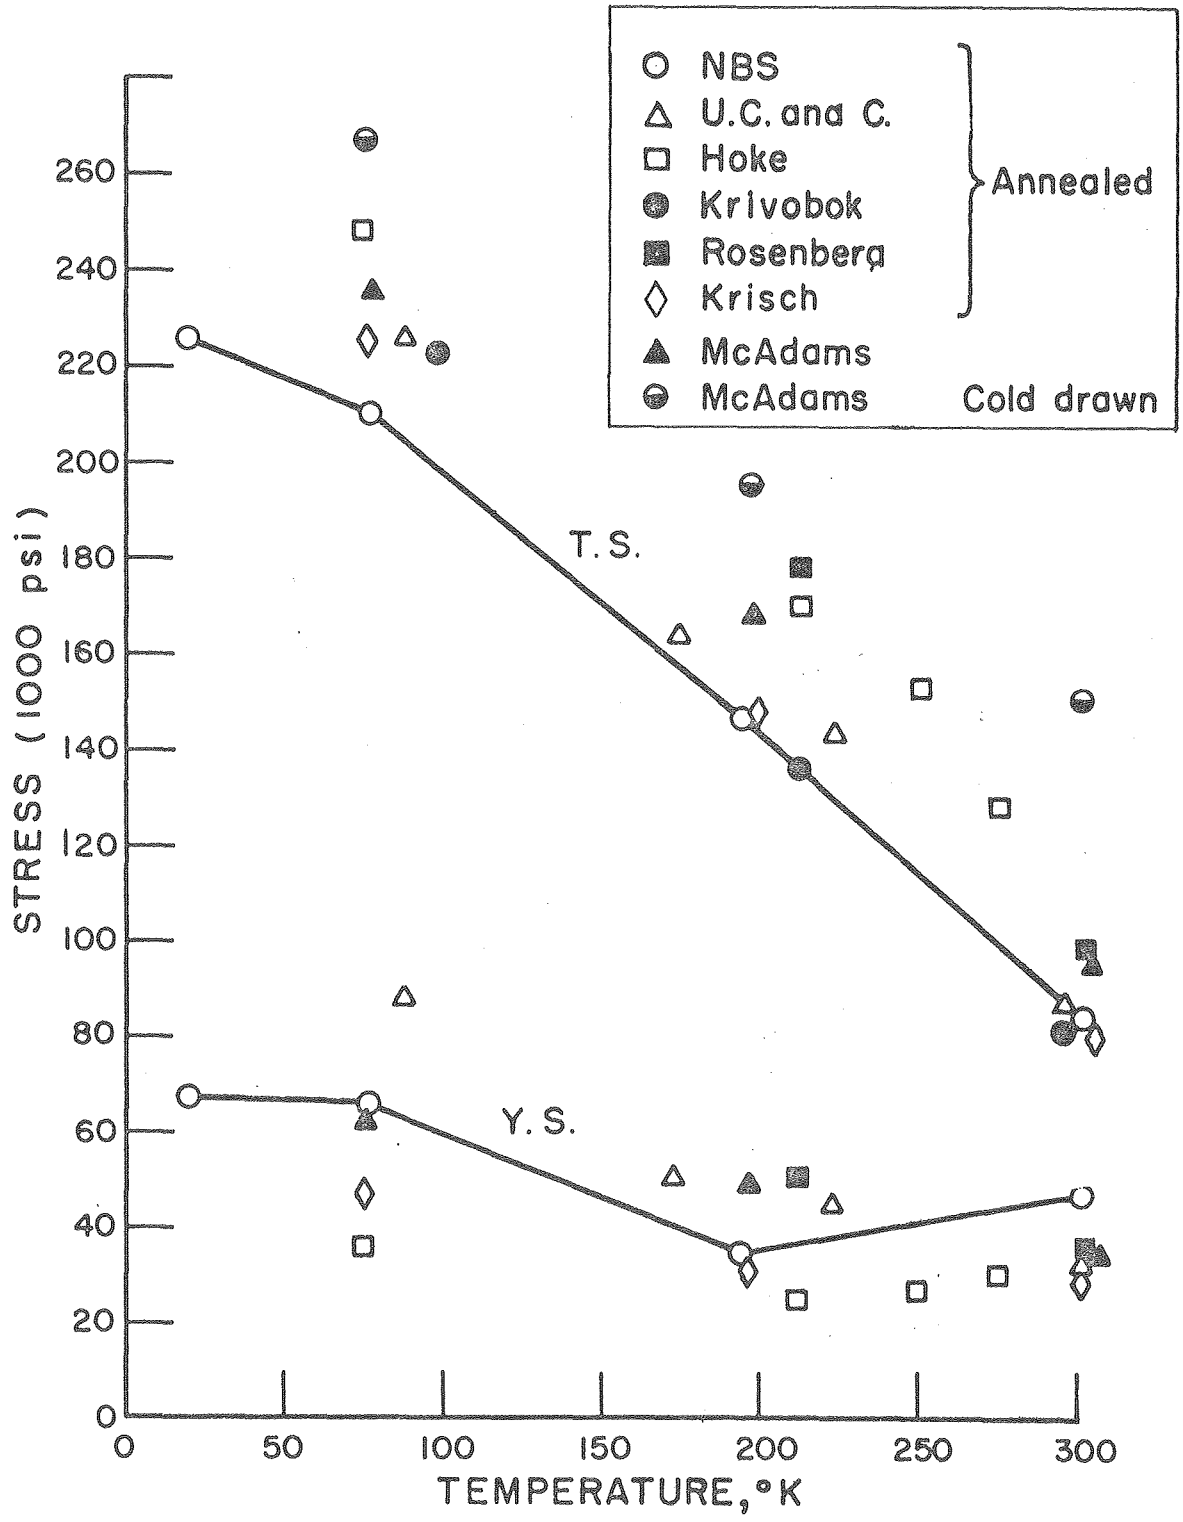

TENSILE AND YIELD STRENGTH
OF
304 STAINLESS STEEL

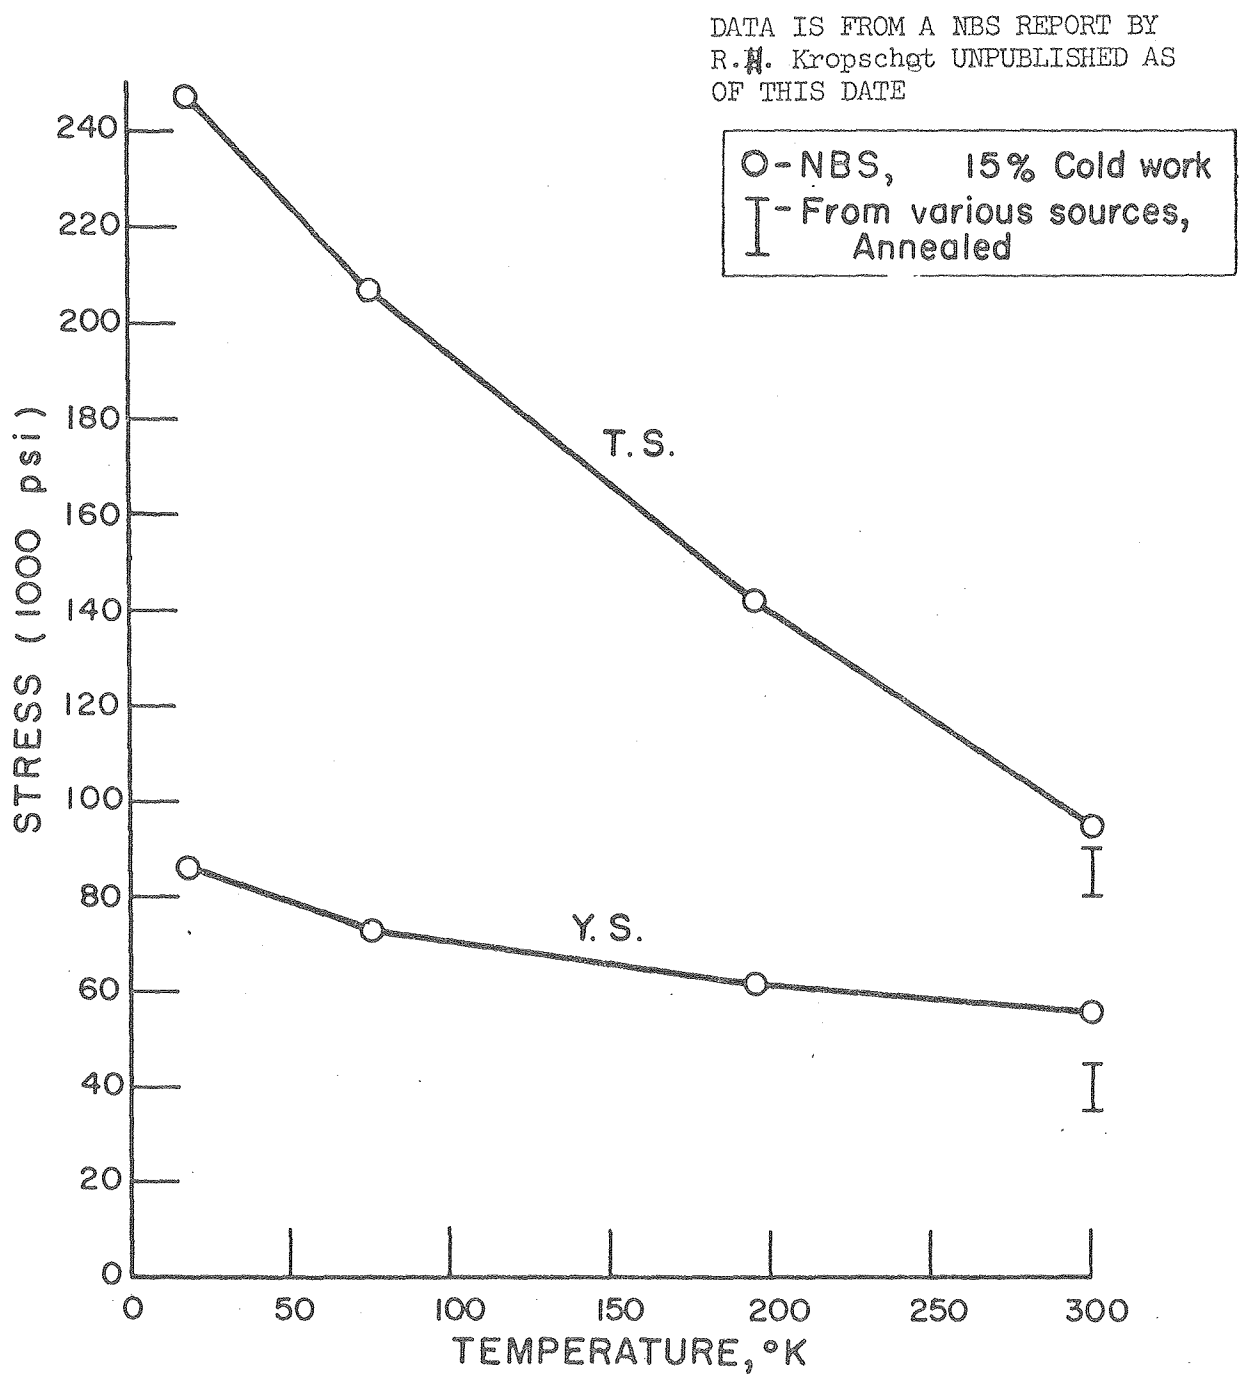

TENSILE AND YIELD STRENGTH
OF
308 STAINLESS STEEL

DATA IS FROM AN NBS REPORT BY
R.N. KROPSCHOT UNPUBLISHED AT
THIS DATE

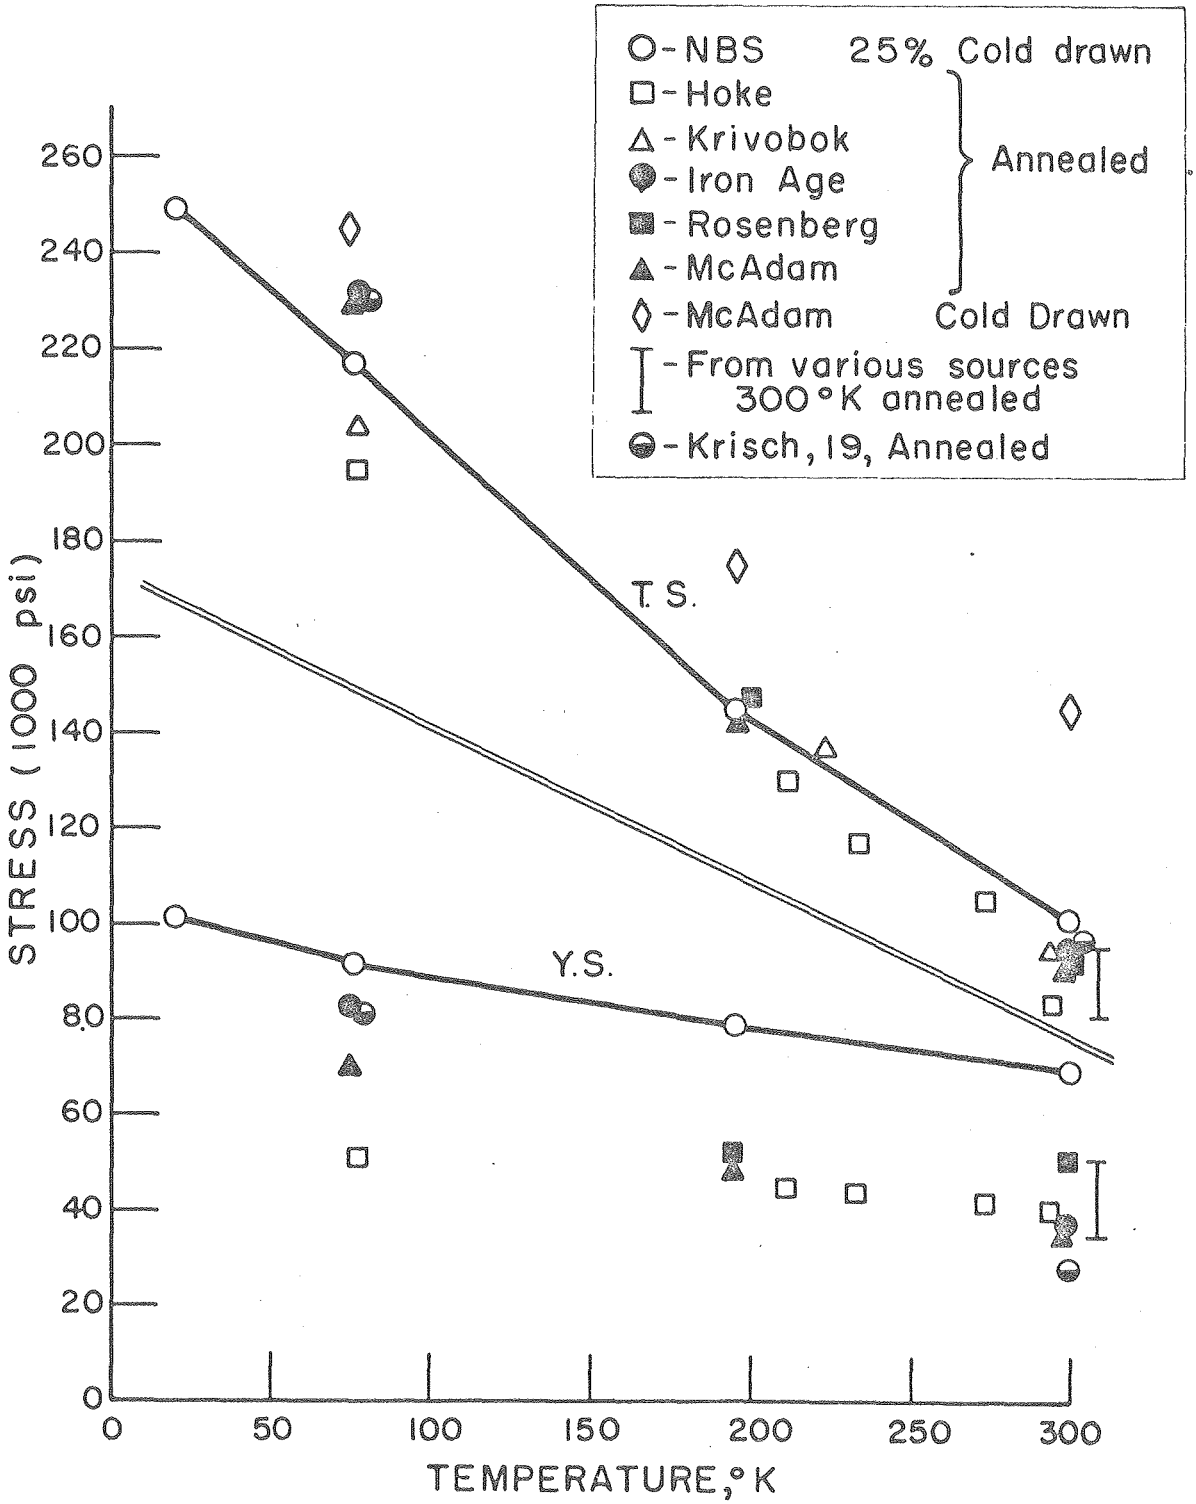

TENSILE AND YIELD STRENGTH
OF
347 STAINLESS STEEL

DATA IS FROM AN NBS REPORT BY
R.W. KROPSCHOT UNPUBLISHED AT
THIS DATE

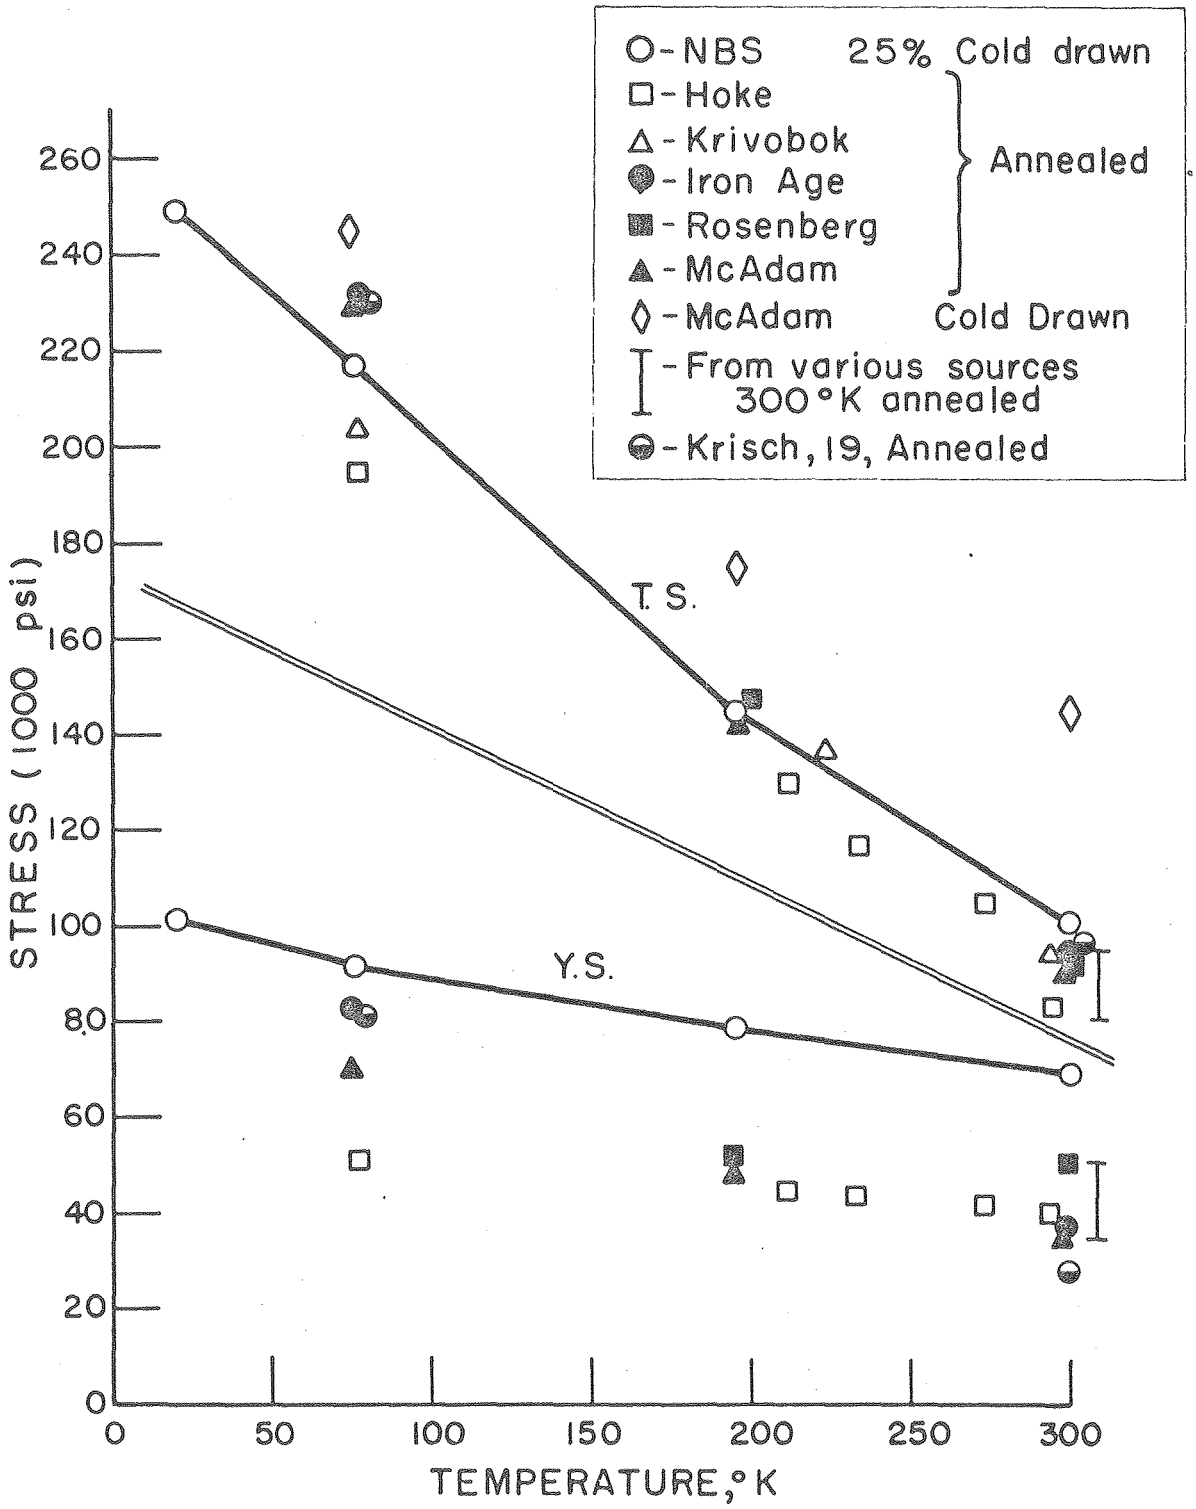

TENSILE AND YIELD STRENGTH
OF
347 STAINLESS STEEL

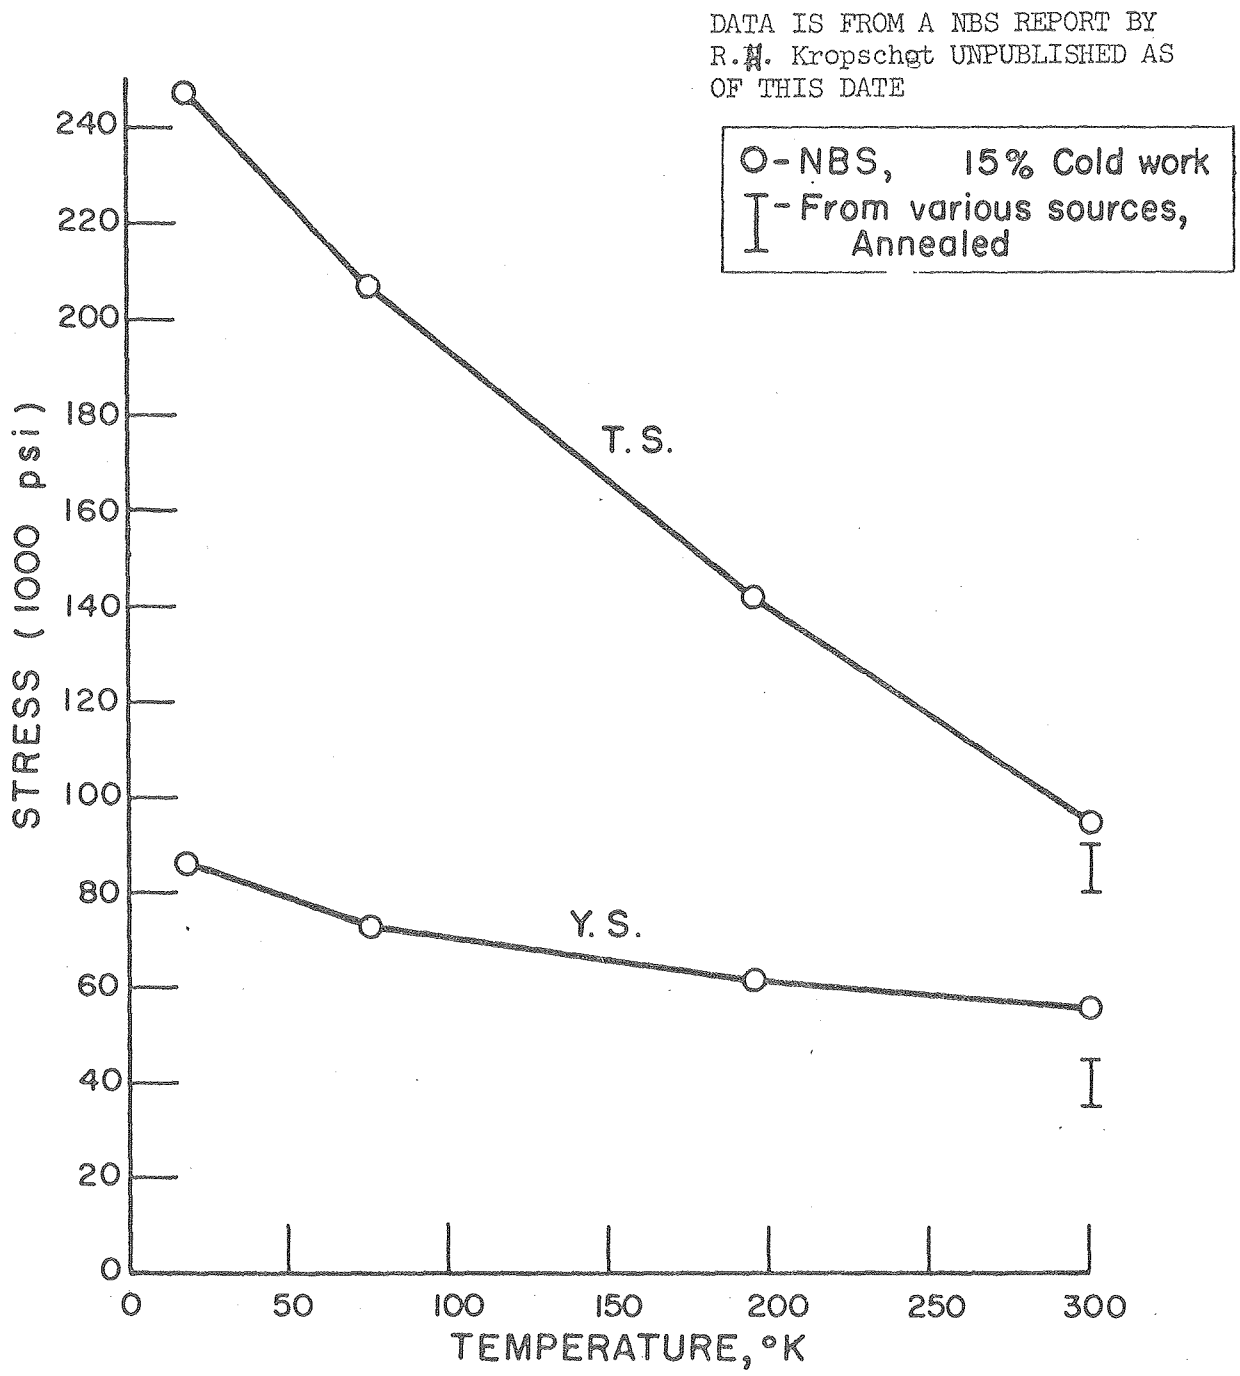

TENSILE AND YIELD STRENGTH
OF
308 STAINLESS STEEL

DATA IS FROM AN NBS REPORT BY R.H. KROPSCHOT UNPUBLISHED AT THIS DATE

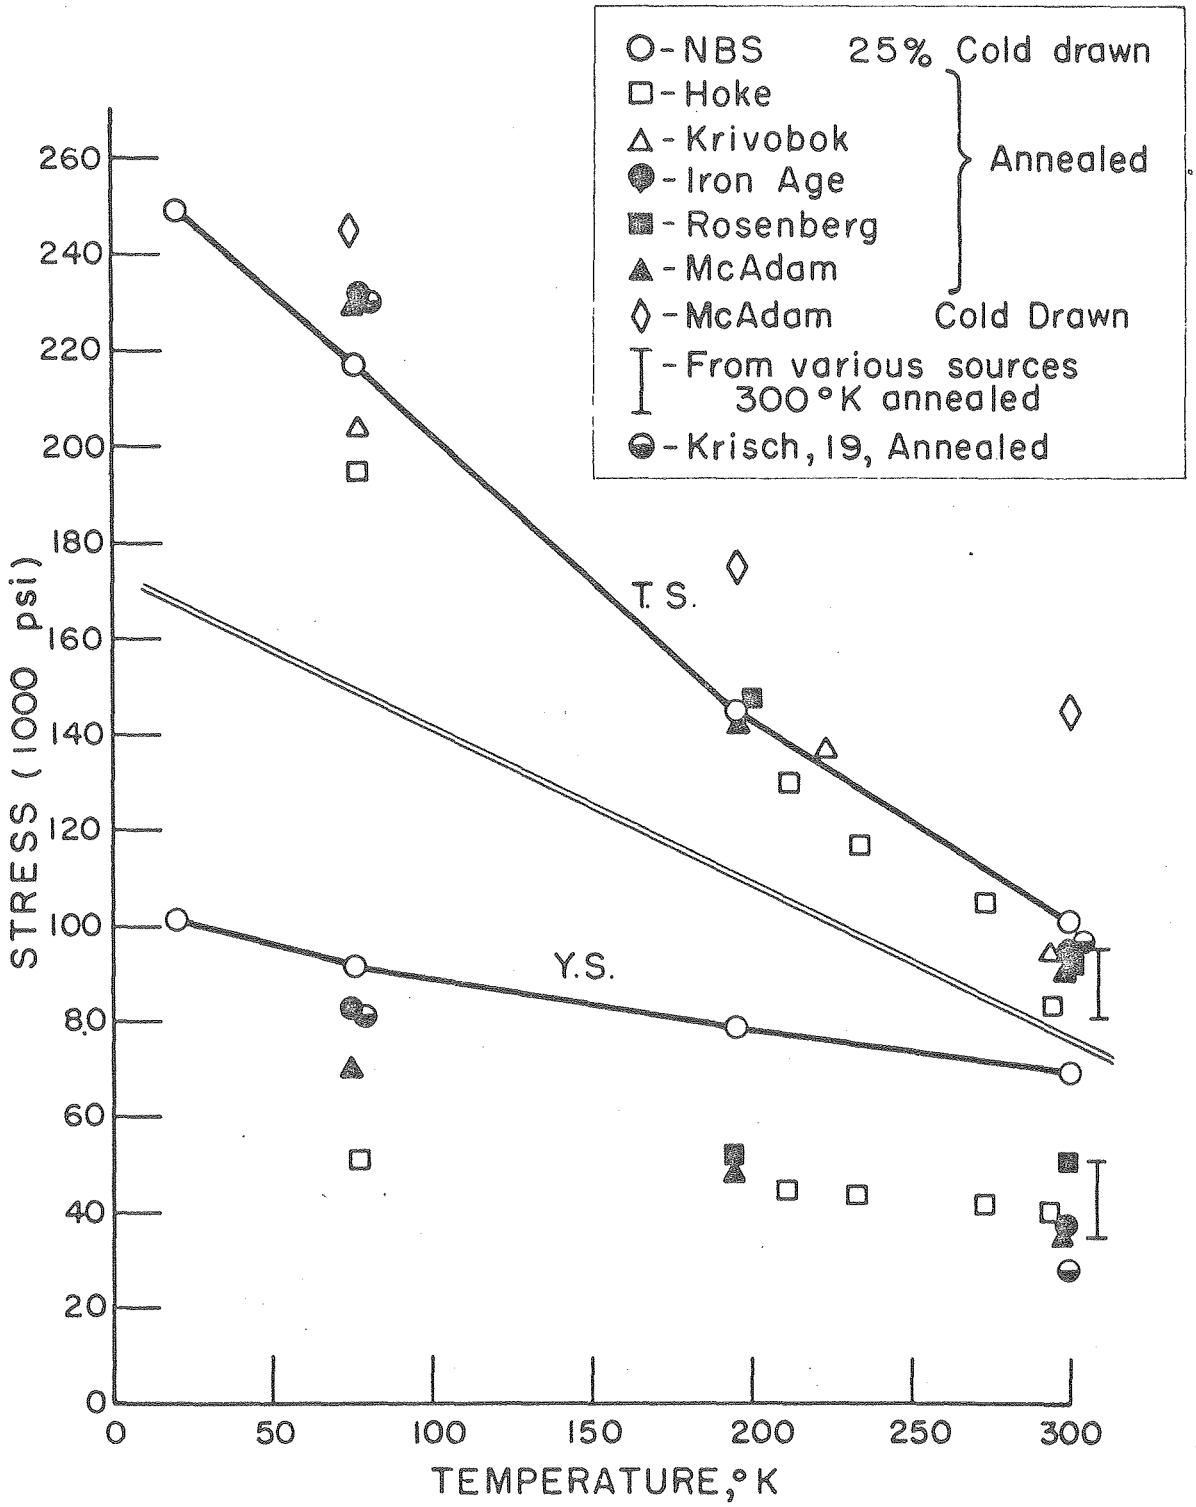

TENSILE AND YIELD STRENGTH
OF
347 STAINLESS STEEL

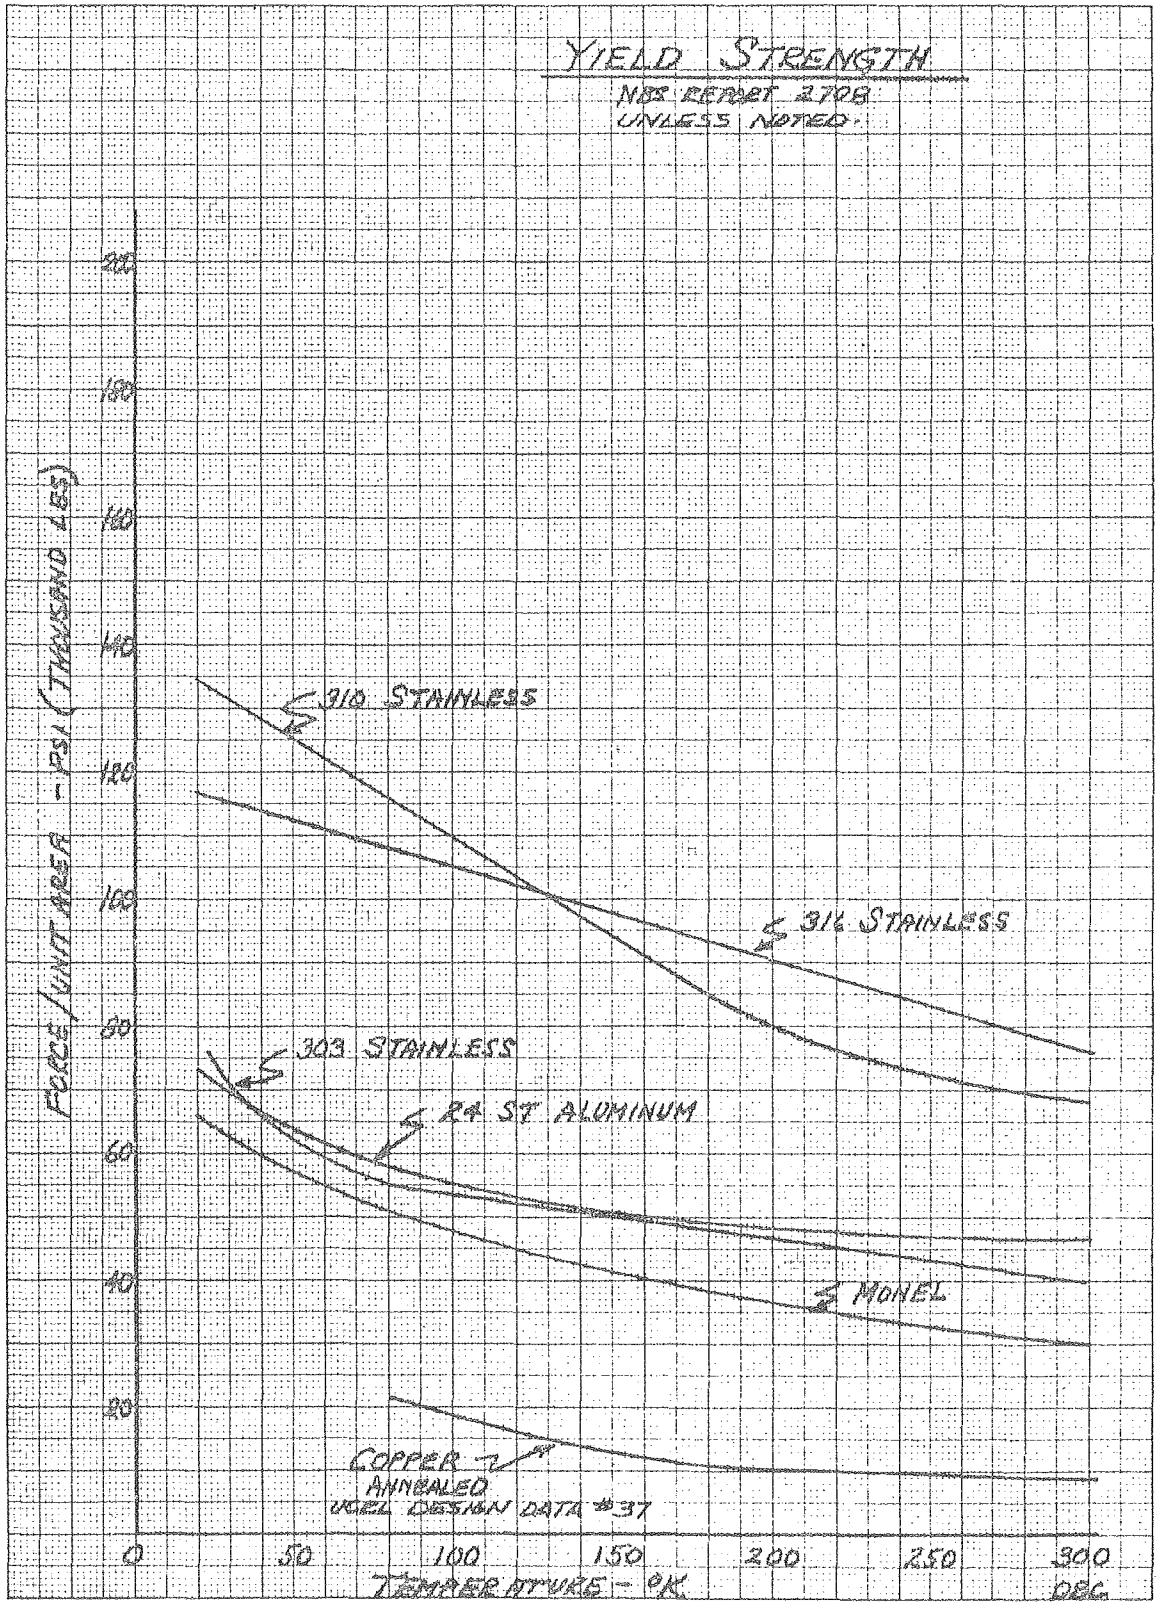
YIELD STRENGTH
NBS REPORT 2708
UNLESS NOTED.
310 STAINLESS
316 STAINLESS
303 STAINLESS
24 ST ALUMINUM
MONEL
COPPER
ANNEALED
NEL DESIGN DATA #37
FORCE/UNIT AREA - PSI (THOUSAND LBS)
TEMPERATURE - °K
0
50
100
150
200
250
300
DEG
20
40
60
80
100
120
140
160
180
200

DATA IS FROM AN NBS REPORT BY R.H. KROPSCHOT
UNPUBLISHED AS OF THIS DATE

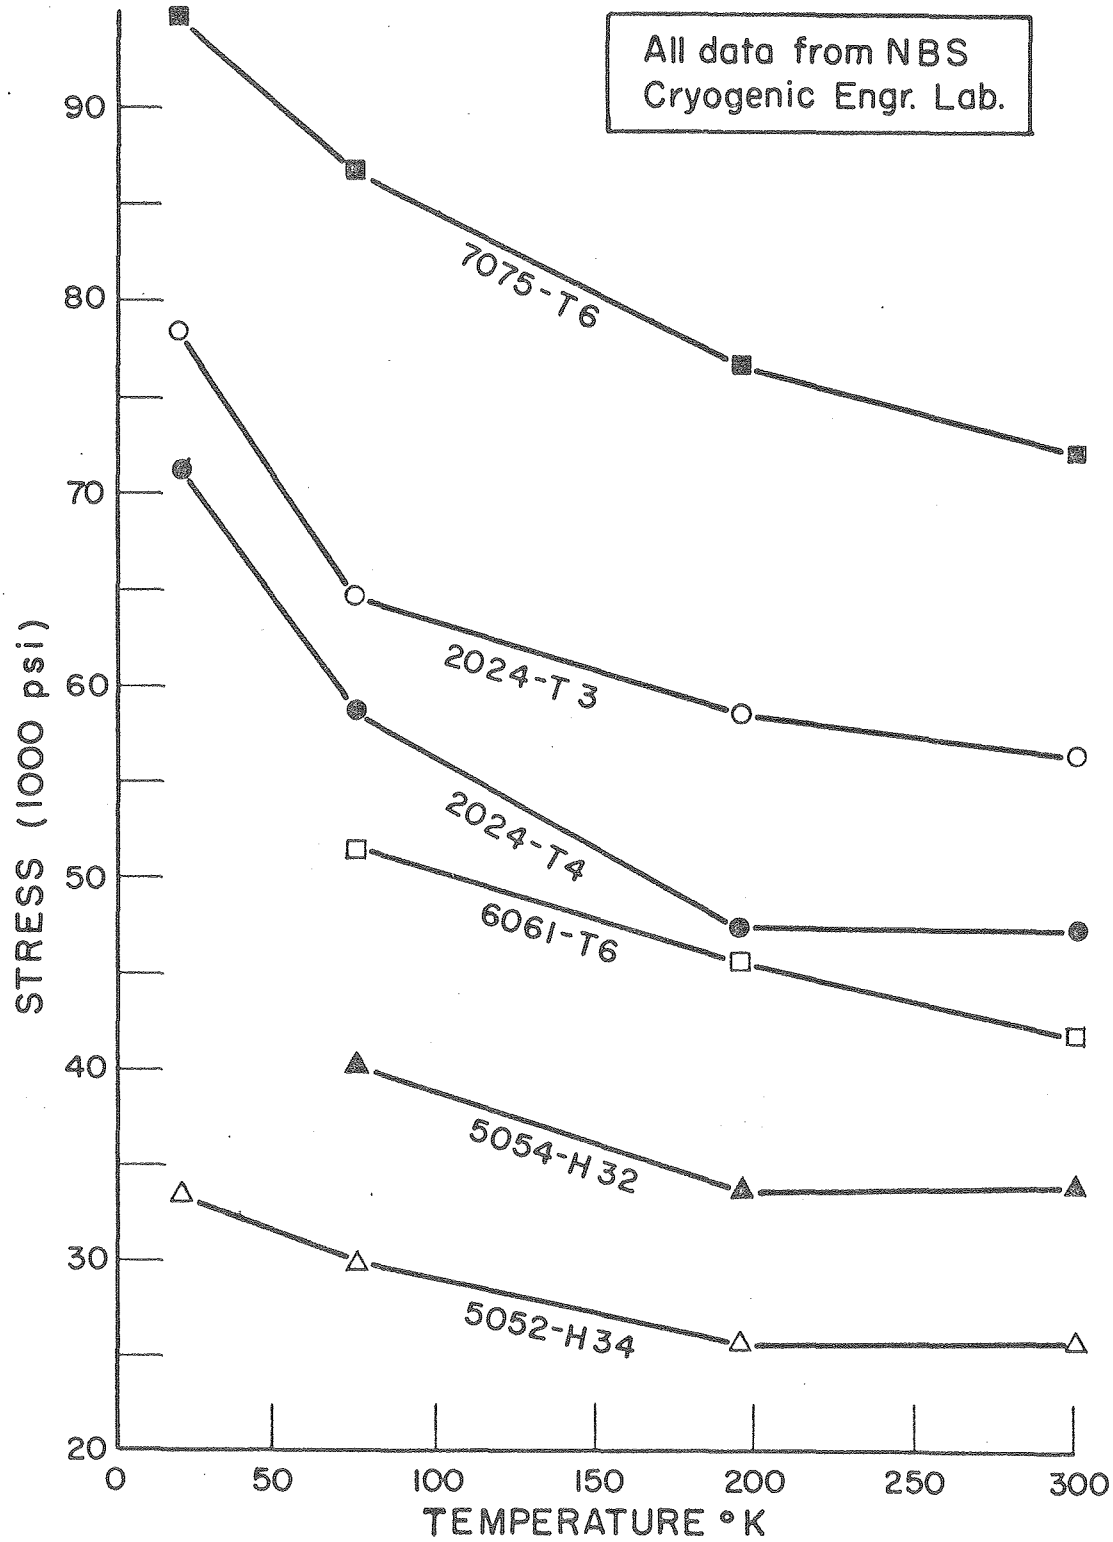

YIELD STRENGTH OF ALUMINUM ALLOYS

DATA IS FROM AN NBS REPORT BY R.H.KROPSCHOT
UNPUBLISHED AS OF THIS DATE

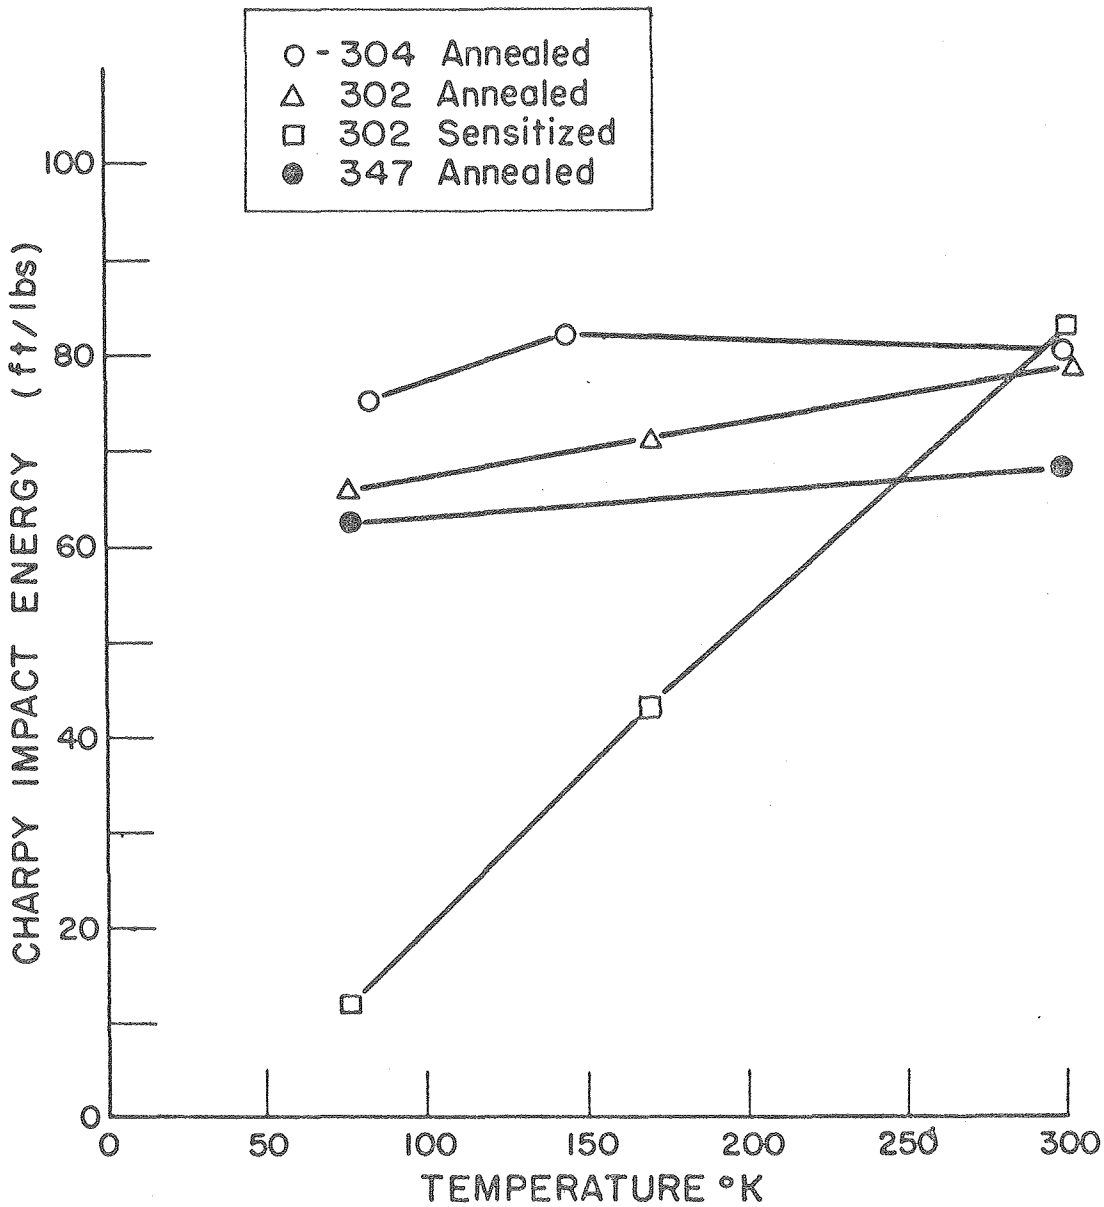

IMPACT STRENGTH OF ANNEALED AND SENSITIZED STAINLESS STEEL

DATA IS FROM AN NBS REPORT BY R.M. KROPSCHOT
UNPUBLISHED AS OF THIS DATE

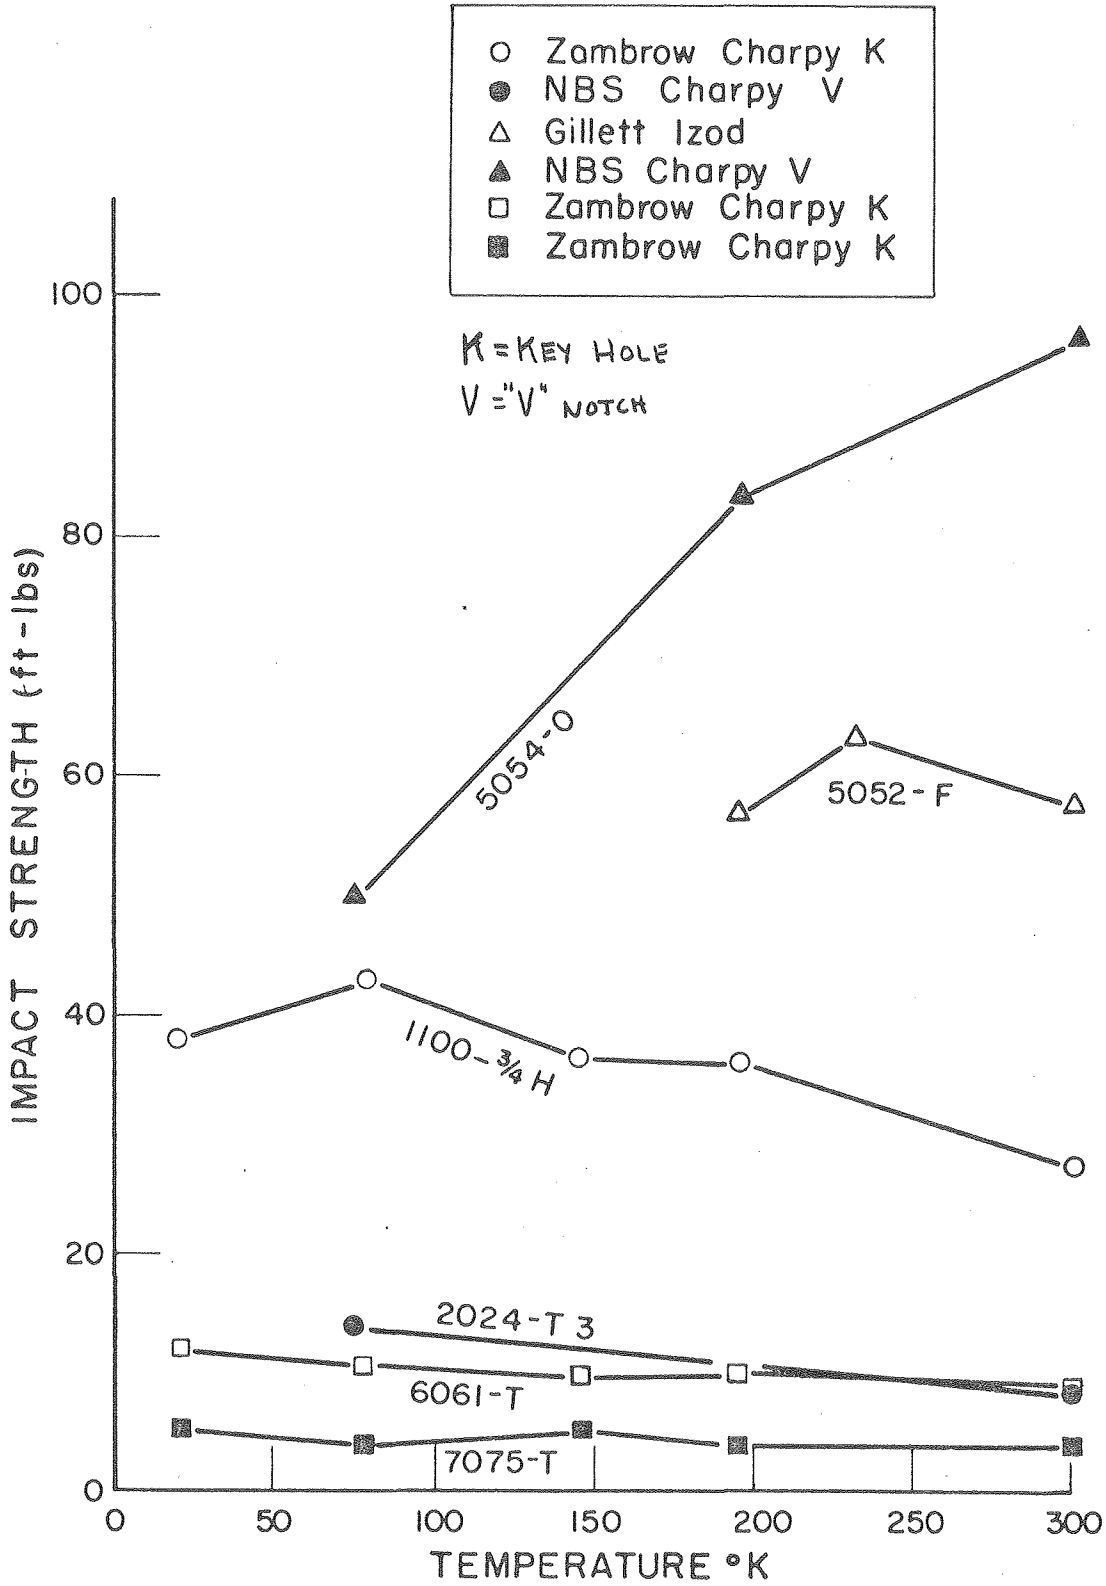

IMPACT STRENGTH OF ALUMINUM ALLOYS

From; R. H. Kropschot, AN EXPERIMENTAL STUDY OF THE STRENGTH AND FATIGUE OF GLASS AT VERY LOW TEMPERATURES, NBS REPORT 3590, June 22, 1956

Condition	Rate Stress increase lb/in^2-sec.	Breaking Stress lb/in^2			
		296°K	194°K	76°K	20°K
A	800	7,500	9,500	10,400	10,400
A	10	5,500	7,500	10,400	10,600
A	1	5,000	6,400	10,400	10,200
U	800	10,400		18,000	

Breaking stress of BSC-2 optical glass.
Median values from probability plots.
A - abraded; U - unabraded.

EMISSIVITIES OF MATERIALS
Measured Values For Radiation Between 300°K and 76°K

D. Chelton
March 8, 1956

Data Taken From NBS, Cryogenic Laboratory, TM16

Metal	Surface Finish	Apparent ϵ
Al	Cockron foil .0015"	.0204
Al on Mylar	1/2 mil plastic, Al vaporized on both sides	.0399
Au on Mylar	1/2 mil plastic, Au vaporized on both sides	.0205
Au	.0015, solvent cleaned	.0099
Sn	.001", mill foil	.0136
Sn	Same sample, partially covered with frost from a condensible gas	.105
Stainless Steel	.005", type 302, solvent cleaned	.0485
Lucite	Plastic dewar, solvent cleaned — — — — (ϵ outside =0.978)*	.60
Cu	.005", dilute chromic acid dip	.0176
Cu	.005", wet polished with Dr. Lyons tooth powder	.0185
Cu	.005", dry polished with plastic polishing wax-abrasive	.0192
Cu	.005", electrolytic cleaned, (this value may be high as trace of frost was observed)	.0178
Al	.00075", Kaiser home foil	.0186
Al	.001", Kaiser foil unannealed	.0184
Al	.001", Kaiser foil unannealed	.0213
Al	.0015", Cockron home foil	.0186
Al	.0015", Cockron home foil	.0204
Al	.0015", Hurwich home foil, mat side	.0212
Al	.0015", Hurwich home foil, bright side	.0217
Al	.020", cold acid cleaned	.0283
Al	.020", Hot acid cleaned, Alco process	.0294
Al	.020", cold acid cleaned	.0317
Al	.020", Alco No. 2 reflector plate ($\epsilon_{25°C}$ visible light =.30)	.0327
Al	.020", Alkali cleaned	.0356
Al	.020", wire brush - emery paper - steel wool - cold acid	.0452
Al	.020", wire brush - emery paper - steel wool	.0615
Al	.020", wire brush	.0615
Al	.020", electrolytic polish, light anodize	.2082
Al	.020", electrolytic polish, heavy anodize	.324

* This value is the computed effective emissivity. During this measurement the radiation was so great that the temperature of the outer wall fell to 279°K. In all other measurements the wall remained at room temperature.

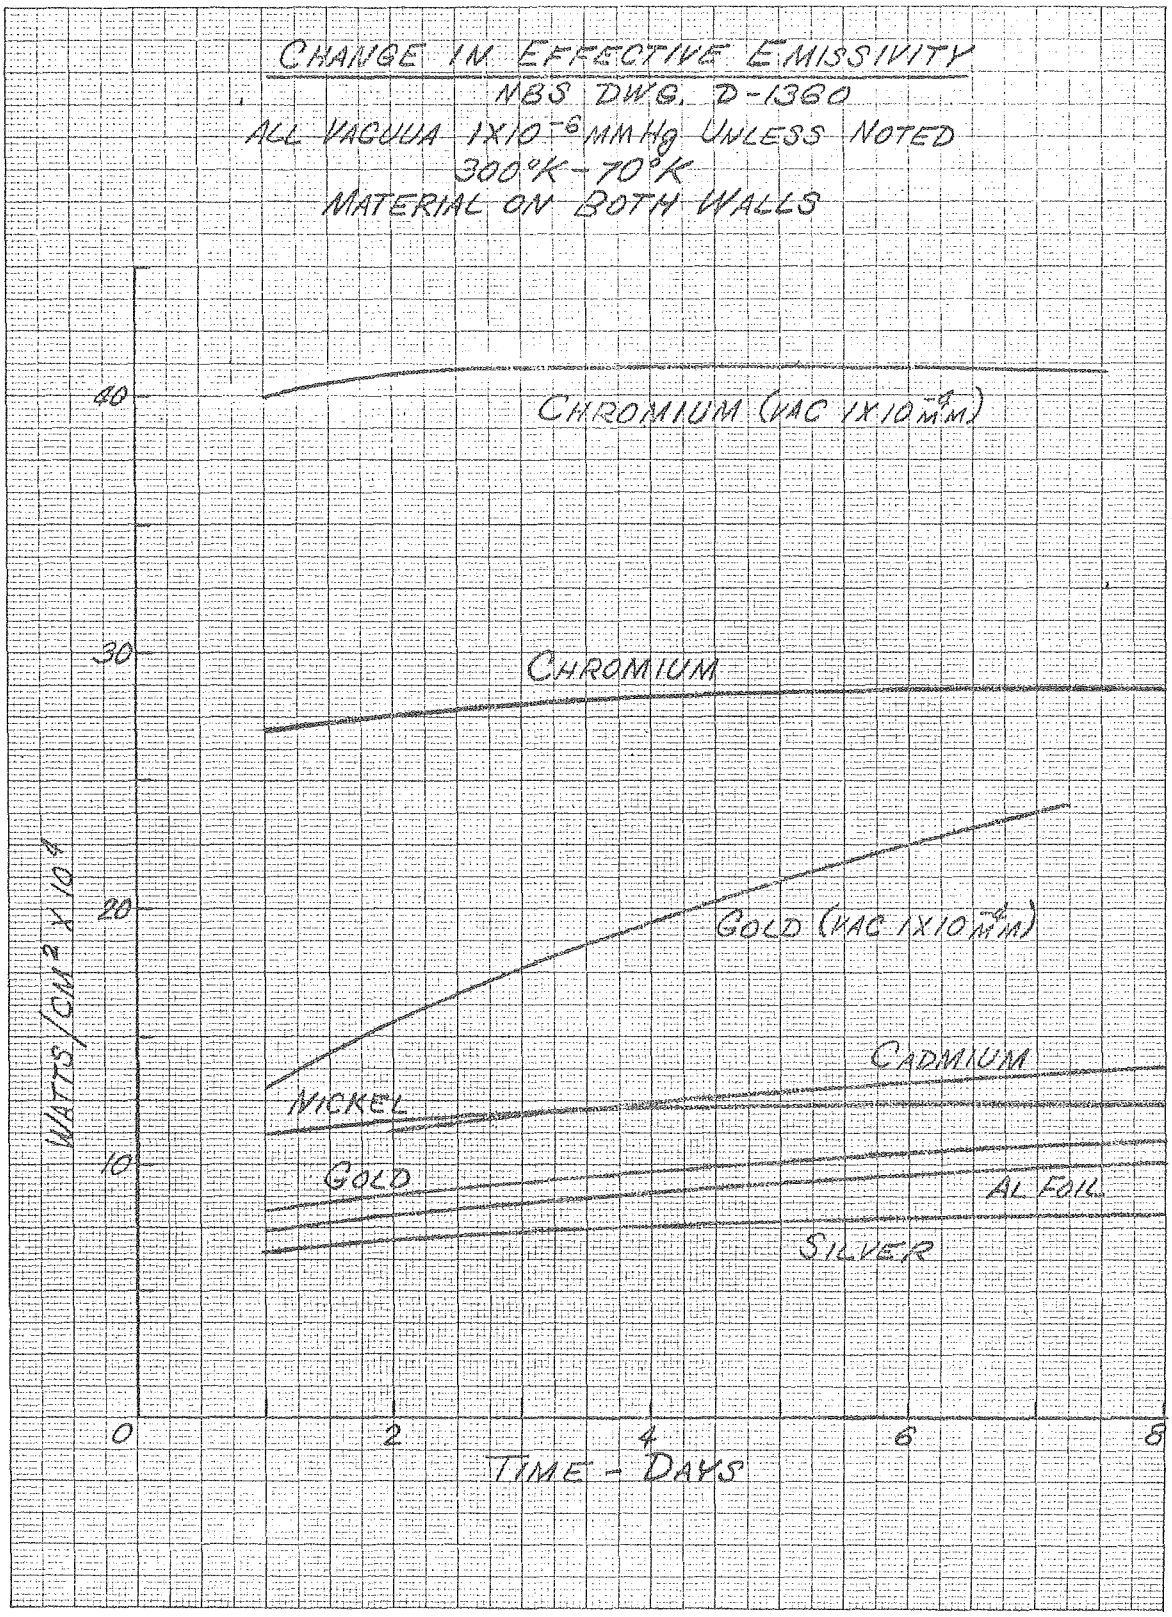
CHANGE IN EFFECTIVE EMISSIVITY
NBS DWG. D-1360
ALL VACUUM 1X10⁻⁶ MM Hg UNLESS NOTED
300°K - 70°K
MATERIAL ON BOTH WALLS
CHROMIUM (VAC 1X10⁻⁸ MM)
CHROMIUM
GOLD (VAC 1X10⁻⁸ MM)
CADMIUM
NICKEL
GOLD
AL FOIL
SILVER
WATTS/CM² X 10⁴
40
30
20
10
0
2
4
6
8
TIME - DAYS

DBM-1-30-36

RADIANT HEAT TRANSFER 77°K to 20°K
BETWEEN CONCENTRIC CYLINDERS (INFINITE)
OR SPHERES

$$Q/A_1 = \sigma \frac{1}{\frac{1}{\epsilon_1} + \frac{A_1}{A_2}\left(\frac{1}{\epsilon_2} - 1\right)} \left(T_2^4 - T_1^4\right)$$

"McADAM'S HEAT TRANSMISSION"

$\sigma = 0.5399 \times 10^{-8} \frac{\text{watts}}{\text{ft}^2\,°\text{K}^4}$

A_1 = INNER AREA

A_2 = OUTER AREA

$T_1 = 20°K$

$T_2 = 77°K$

$\epsilon_1 = \epsilon_2$ = Surface emissivities

$\frac{Q}{A}$ = HEAT FLUX $\frac{\text{WATTS}}{\text{FT}^2}$

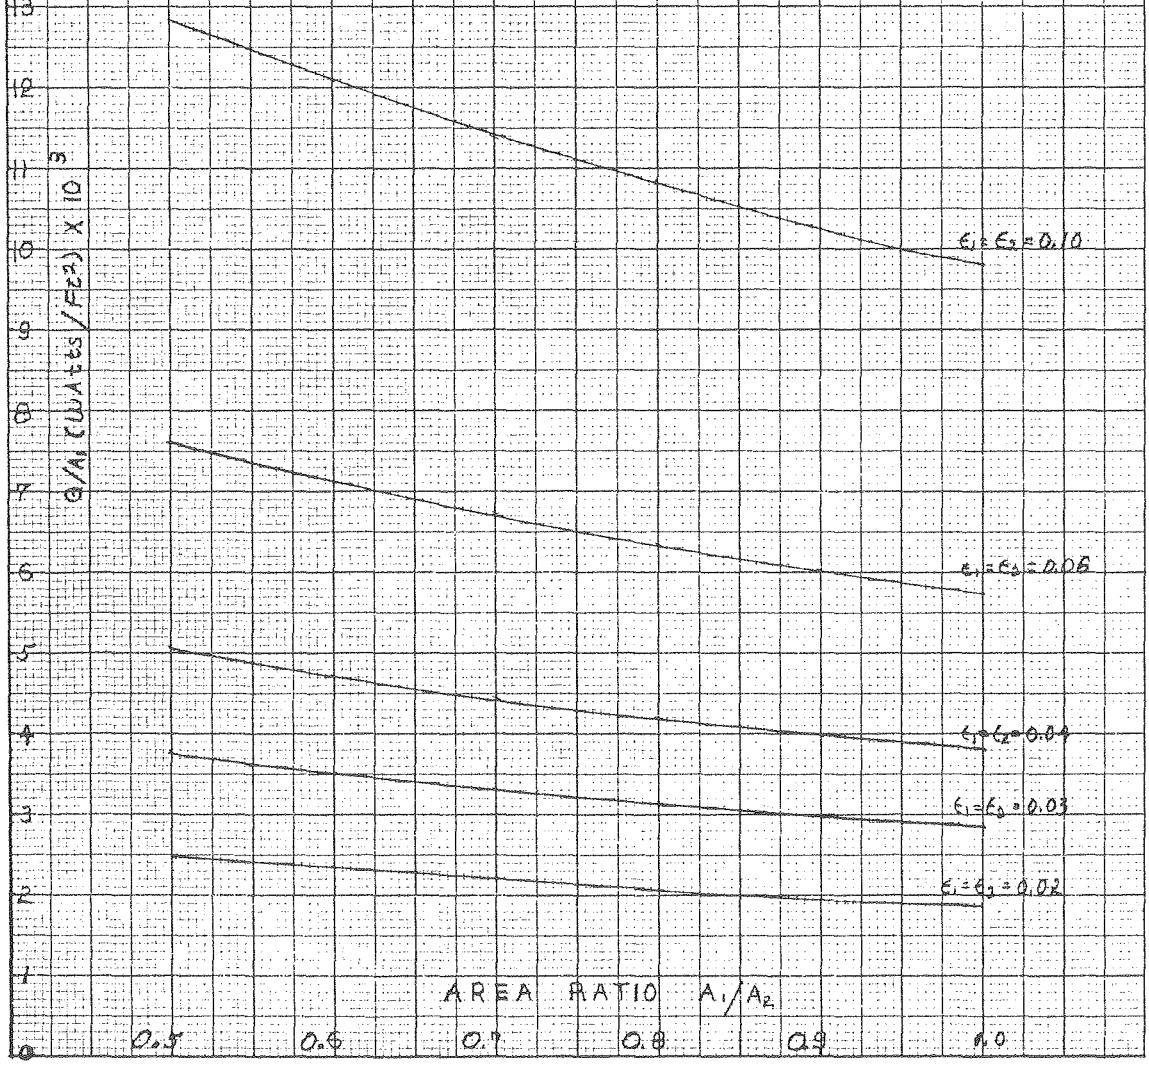

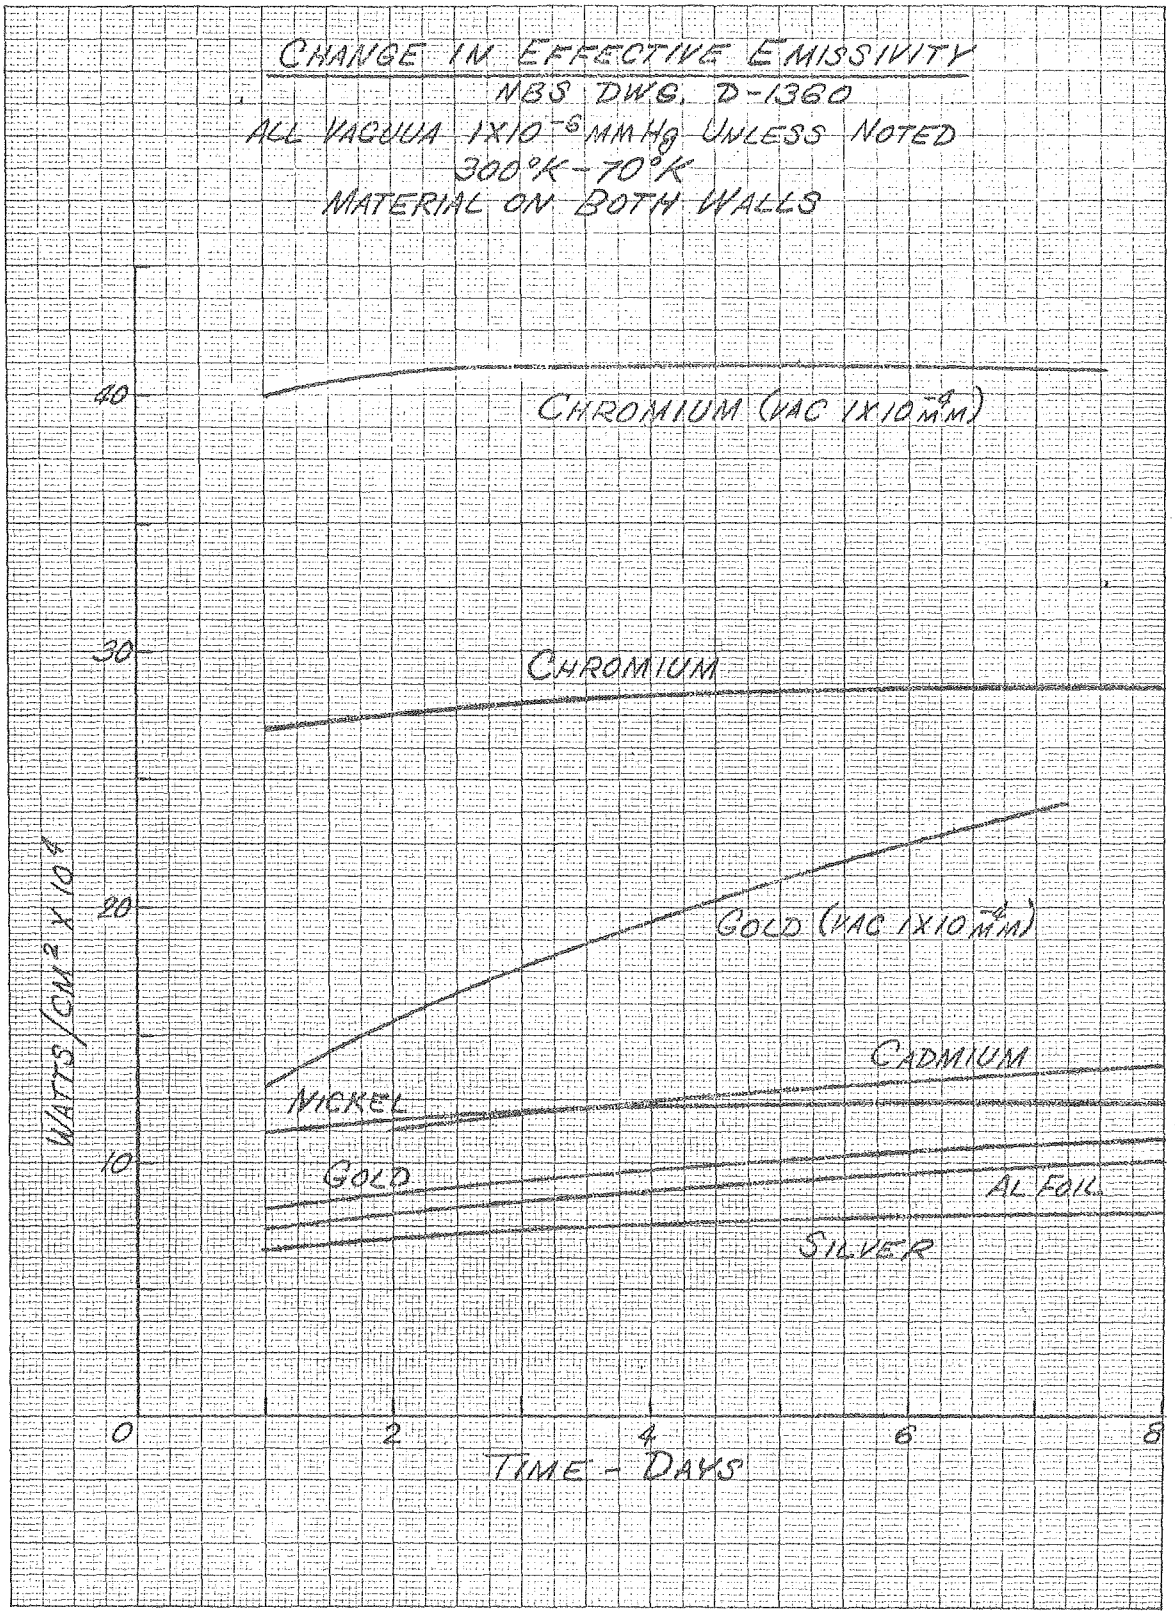
CHANGE IN EFFECTIVE EMISSIVITY
NBS DWG. D-1360
ALL VACUUM 1X10⁻⁶ MMHg UNLESS NOTED
300°K-70°K
MATERIAL ON BOTH WALLS
CHROMIUM (VAC 1X10⁻⁹ MM)
CHROMIUM
GOLD (VAC 1X10⁻⁶ MM)
CADMIUM
NICKEL
GOLD
AL FOIL
SILVER
WATTS/CM² X 10⁴
40
30
20
10
0
2
4
6
8
TIME - DAYS

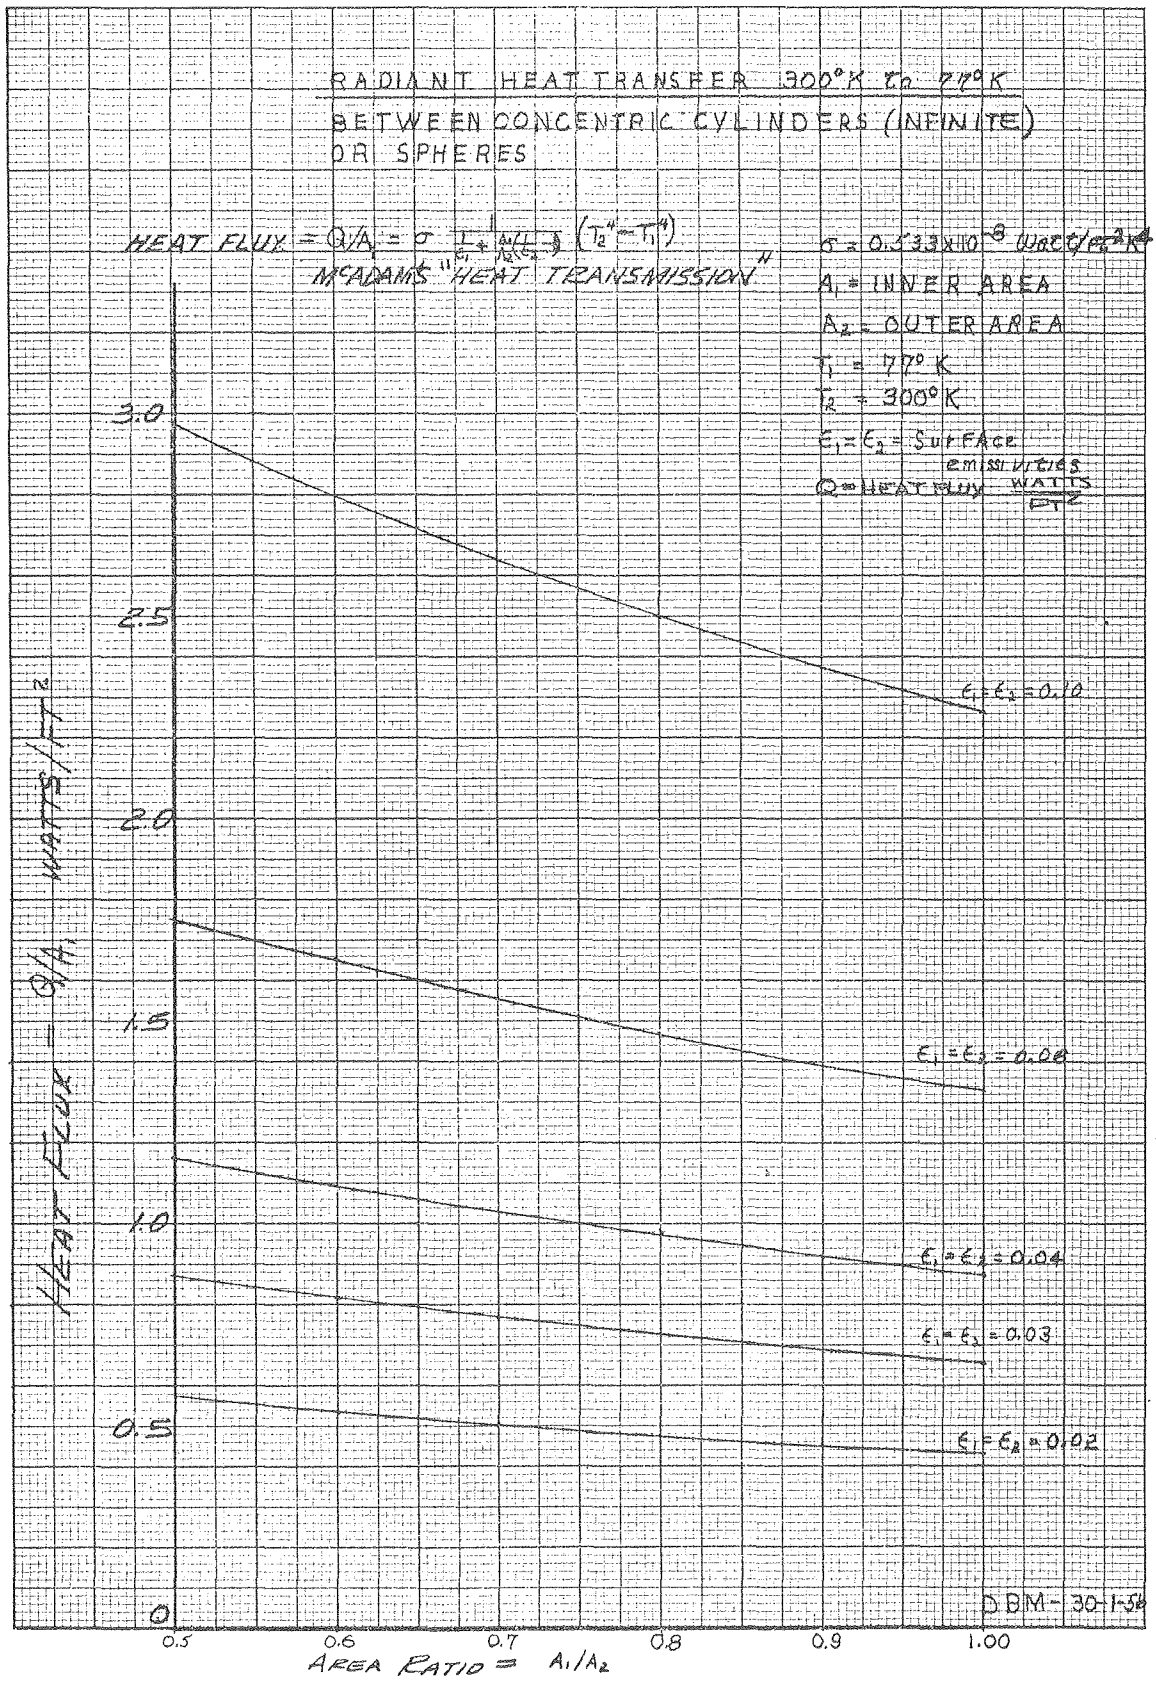
RADIANT HEAT TRANSFER 300°K to 77°K
BETWEEN CONCENTRIC CYLINDERS (INFINITE)
OR SPHERES
HEAT FLUX = Q/A₁ = σ [1/ε₁ + (A₁/A₂)(1/ε₂ − 1)] (T₂⁴ − T₁⁴)
McADAMS "HEAT TRANSMISSION"
σ = 0.5333×10⁻⁸ WATTS/FT²-K⁴
A₁ = INNER AREA
A₂ = OUTER AREA
T₁ = 77° K
T₂ = 300° K
ε₁ = ε₂ = SURFACE EMISSIVITIES
Q = HEAT FLUX WATTS/FT²
HEAT FLUX = Q/A₁ WATTS/FT²
3.0
2.5
2.0
1.5
1.0
0.5
0
ε₁ = ε₂ = 0.10
ε₁ = ε₂ = 0.08
ε₁ = ε₂ = 0.04
ε₁ = ε₂ = 0.03
ε₁ = ε₂ = 0.02
0.5
0.6
0.7
0.8
0.9
1.00
AREA RATIO = A₁/A₂
DBM-30-1-56

DBM-1-30-56

RADIANT HEAT TRANSFER 77°K to 20°K
BETWEEN CONCENTRIC CYLINDERS (INFINITE)
OR SPHERES

$$Q/A_1 = \sigma \frac{1}{\frac{1}{\epsilon_1} + \frac{A_1}{A_2}\left(\frac{1}{\epsilon_2} - 1\right)} \left(T_2^4 - T_1^4\right)$$

McADAM'S "HEAT TRANSMISSION"

$\sigma = 0.5333 \times 10^{-8}$ WATTS / FT² °K⁴

A_1 = INNER AREA

A_2 = OUTER AREA

$T_1 = 20°K$

$T_2 = 77°K$

$\epsilon_1 = \epsilon_2$ = Surface emissivities

$\frac{Q}{A}$ = HEAT FLUX WATTS / FT²

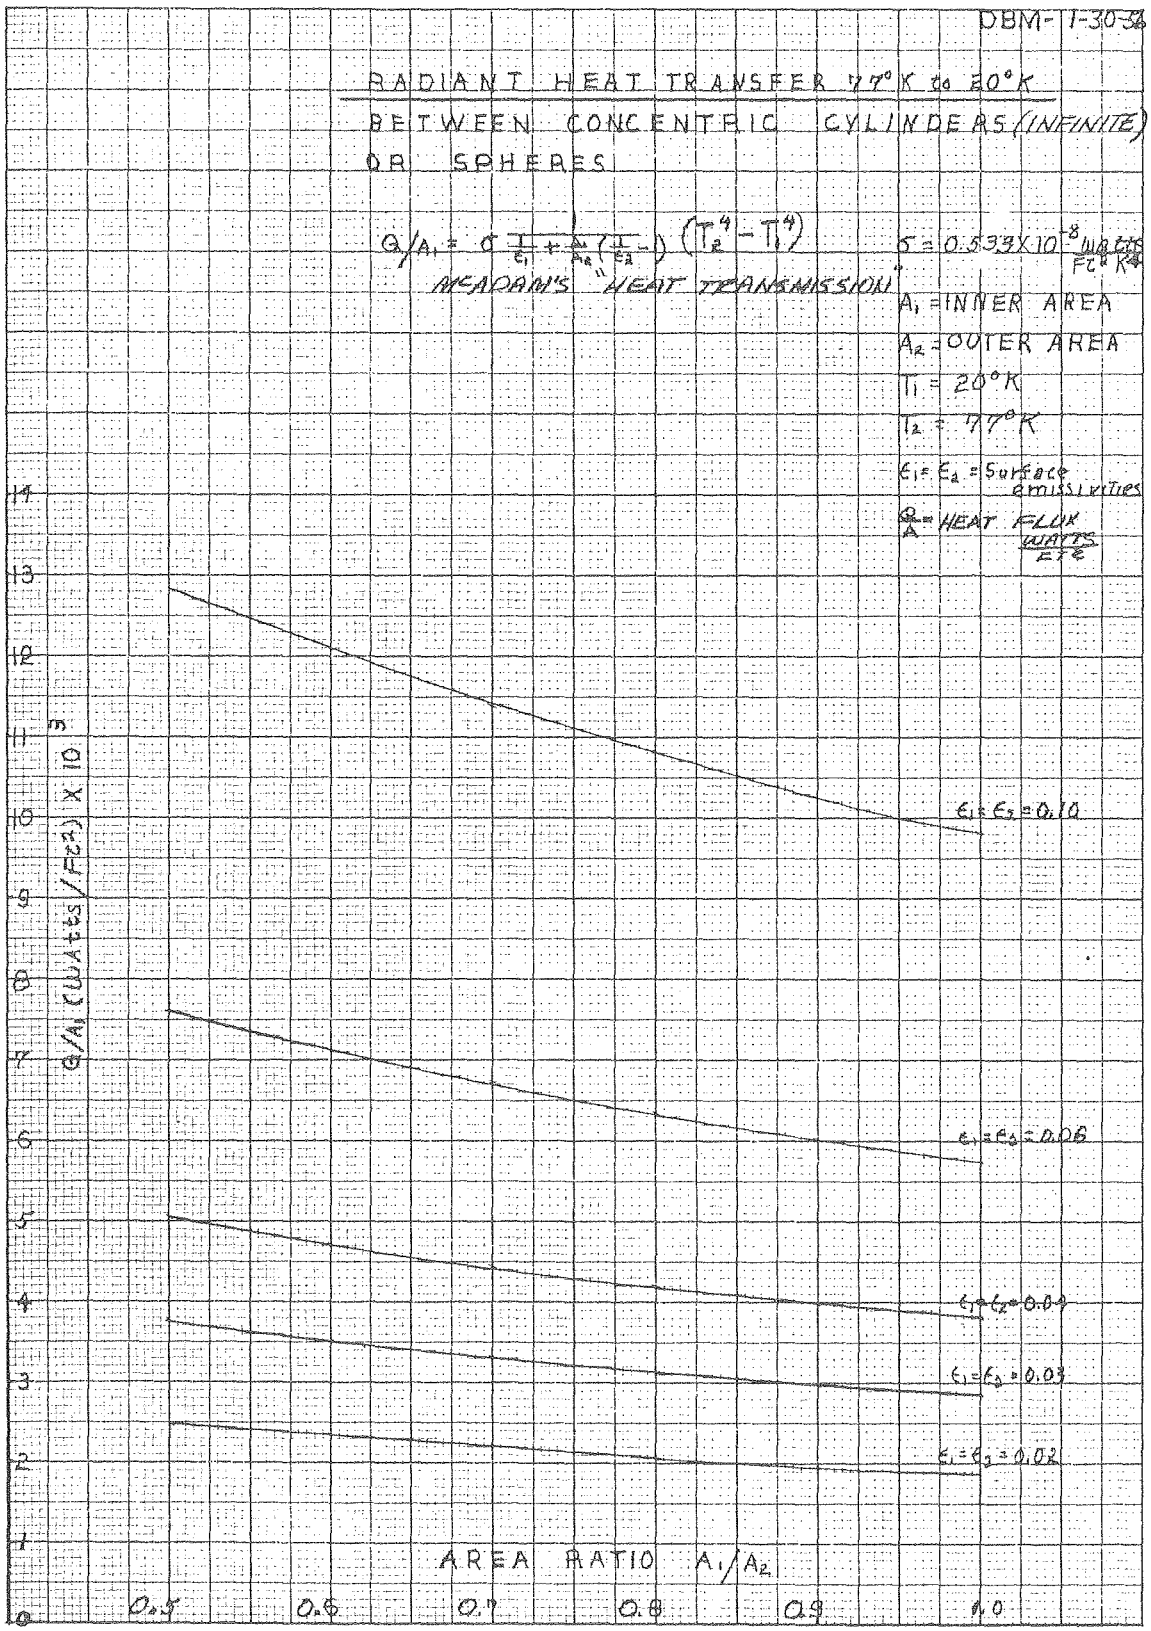

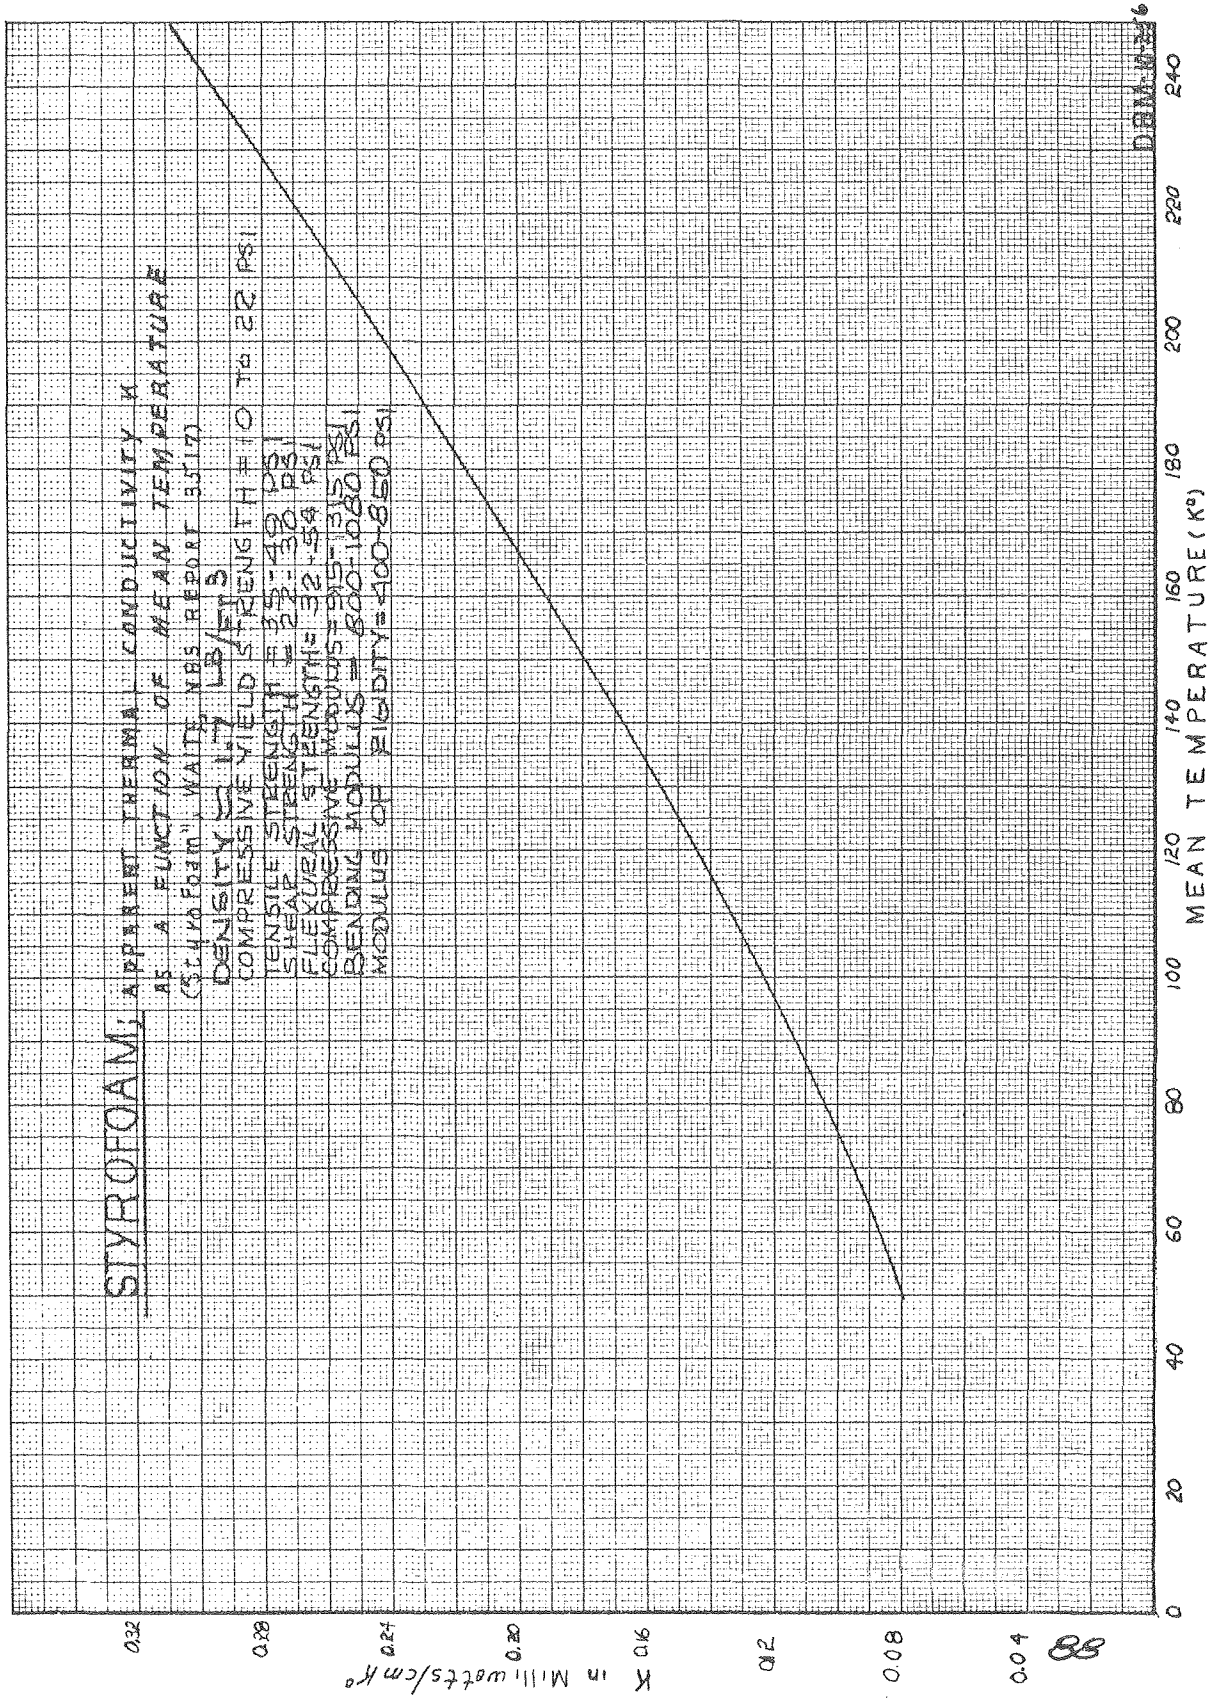
STYROFOAM; APPARENT THERMAL CONDUCTIVITY K
AS A FUNCTION OF MEAN TEMPERATURE
(Styrofoam, WAITE, NBS REPORT 3517)
DENSITY = 1.7 LB/FT3
COMPRESSIVE YIELD STRENGTH = 10 TO 22 PSI
TENSILE STRENGTH = 35-49 PSI
SHEAR STRENGTH = 22-30 PSI
FLEXURAL STRENGTH = 32-54 PSI
COMPRESSIVE MODULUS = 915-1315 PSI
BENDING MODULUS = 800-1080 PSI
MODULUS OF RIGIDITY = 400-850 PSI
MEAN TEMPERATURE (K°)
K in Milliwatts/cm K°
0
20
40
60
80
100
120
140
160
180
200
220
240
0.04
0.08
0.12
0.16
0.20
0.24
0.28
0.32

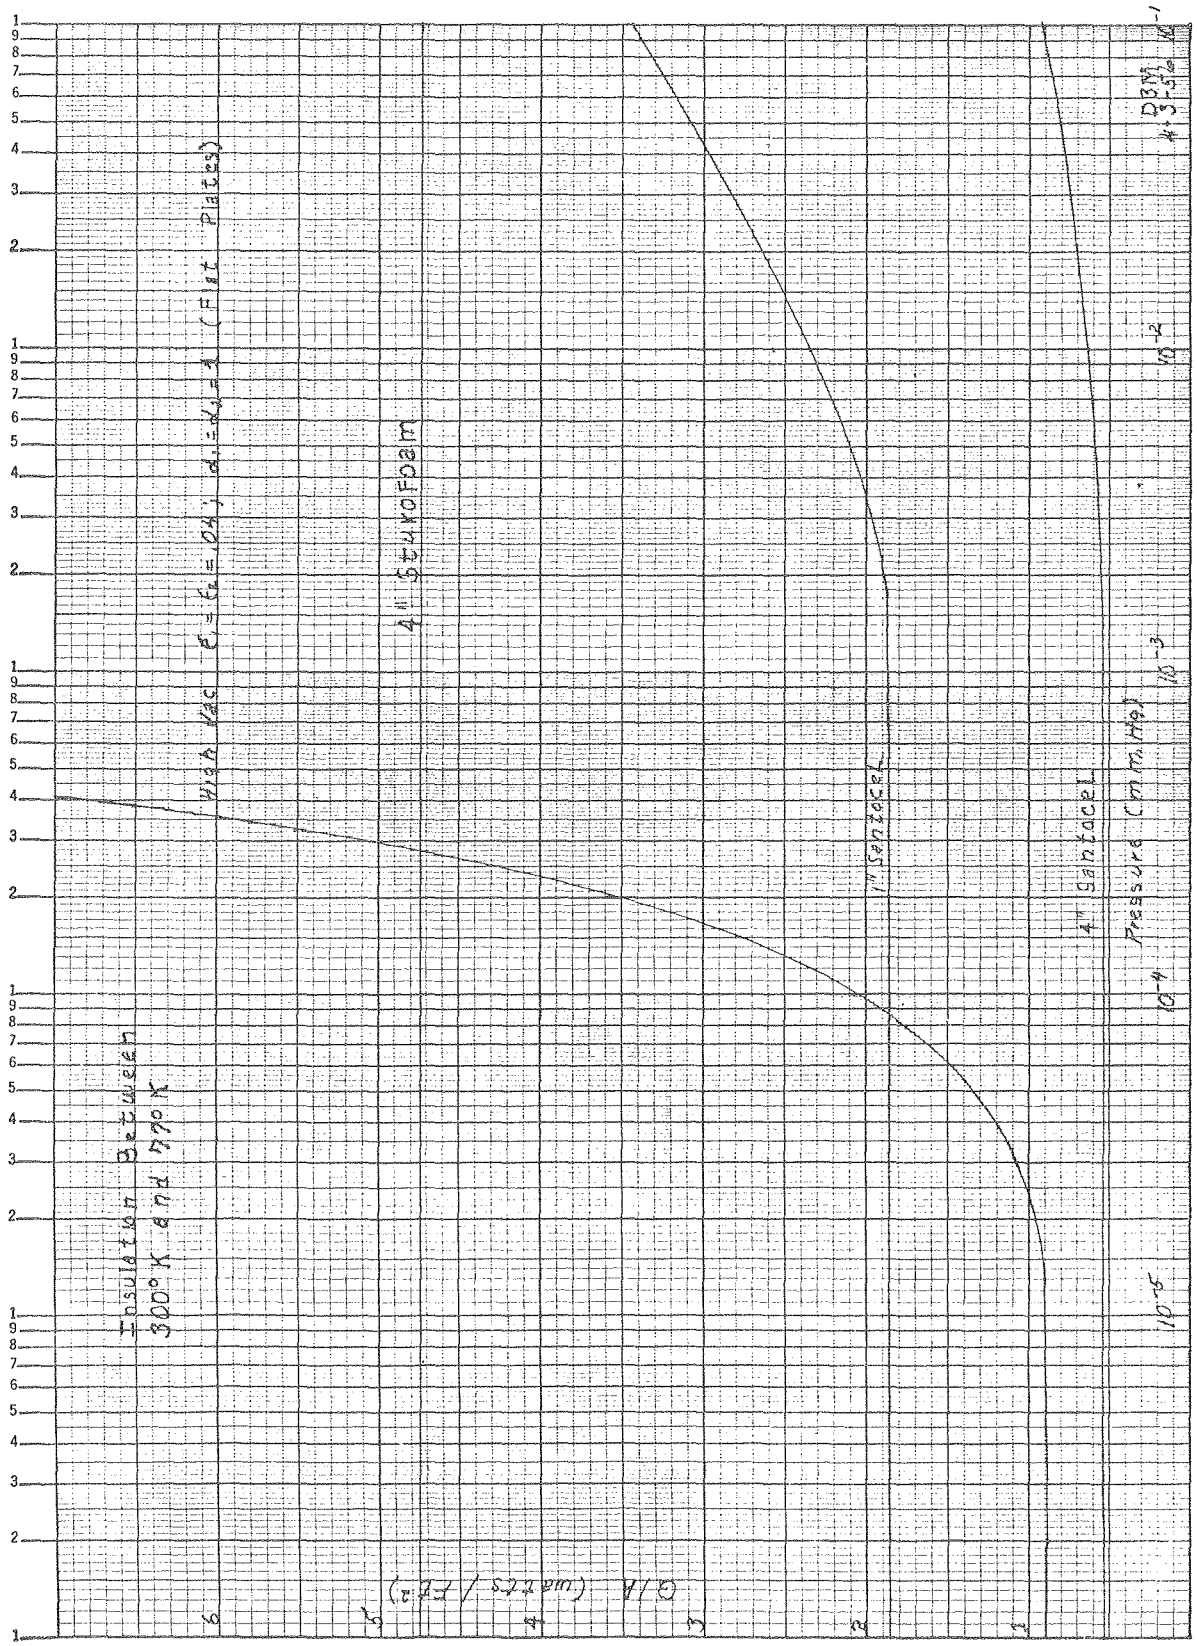
Insulation Between
300°K and 77°K
High Vac
4" Stirofoam
1" Santocel
4" Santocel
Pressure (mm Hg)
Q/A (watts / ft²)
DBM

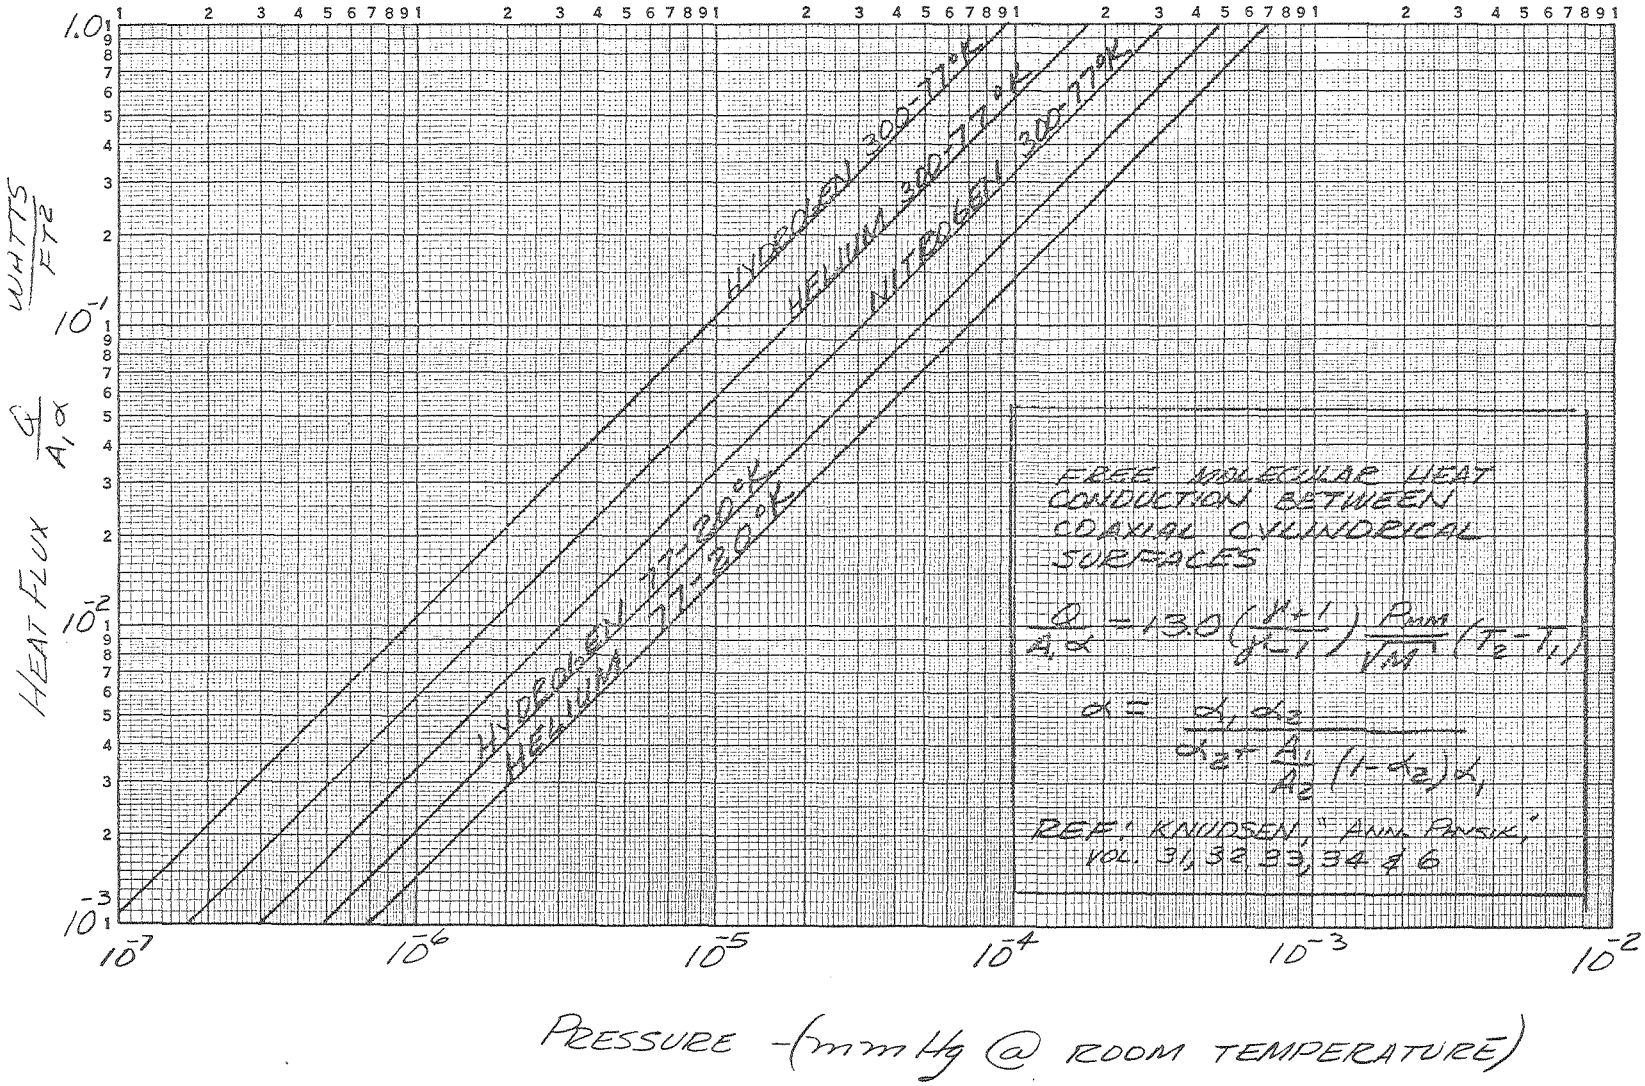
HEAT FLUX $\frac{Q}{A_1 \alpha}$ $\frac{WATTS}{FT^2}$
1.0
10^{-1}
10^{-2}
10^{-3}
10^{-7}
10^{-6}
10^{-5}
10^{-4}
10^{-3}
10^{-2}
PRESSURE - (mm Hg @ ROOM TEMPERATURE)
HYDROGEN 300-77°K
HELIUM 300-77°K
NITROGEN 300-77°K
HYDROGEN 77-20°K
HELIUM 77-20°K
FREE MOLECULAR HEAT CONDUCTION BETWEEN COAXIAL CYLINDRICAL SURFACES
$\frac{Q}{A_1 \alpha} = 13.0 \left(\frac{\gamma+1}{\gamma-1}\right) \frac{P_{mm}}{\sqrt{M}} (T_2 - T_1)$
$\alpha = \frac{\alpha_1 \alpha_2}{\alpha_2 + \frac{A_1}{A_2}(1-\alpha_2)\alpha_1}$
REF: KNUDSEN, "ANN. PHYSIK," VOL. 31, 32, 33, 34 & 6

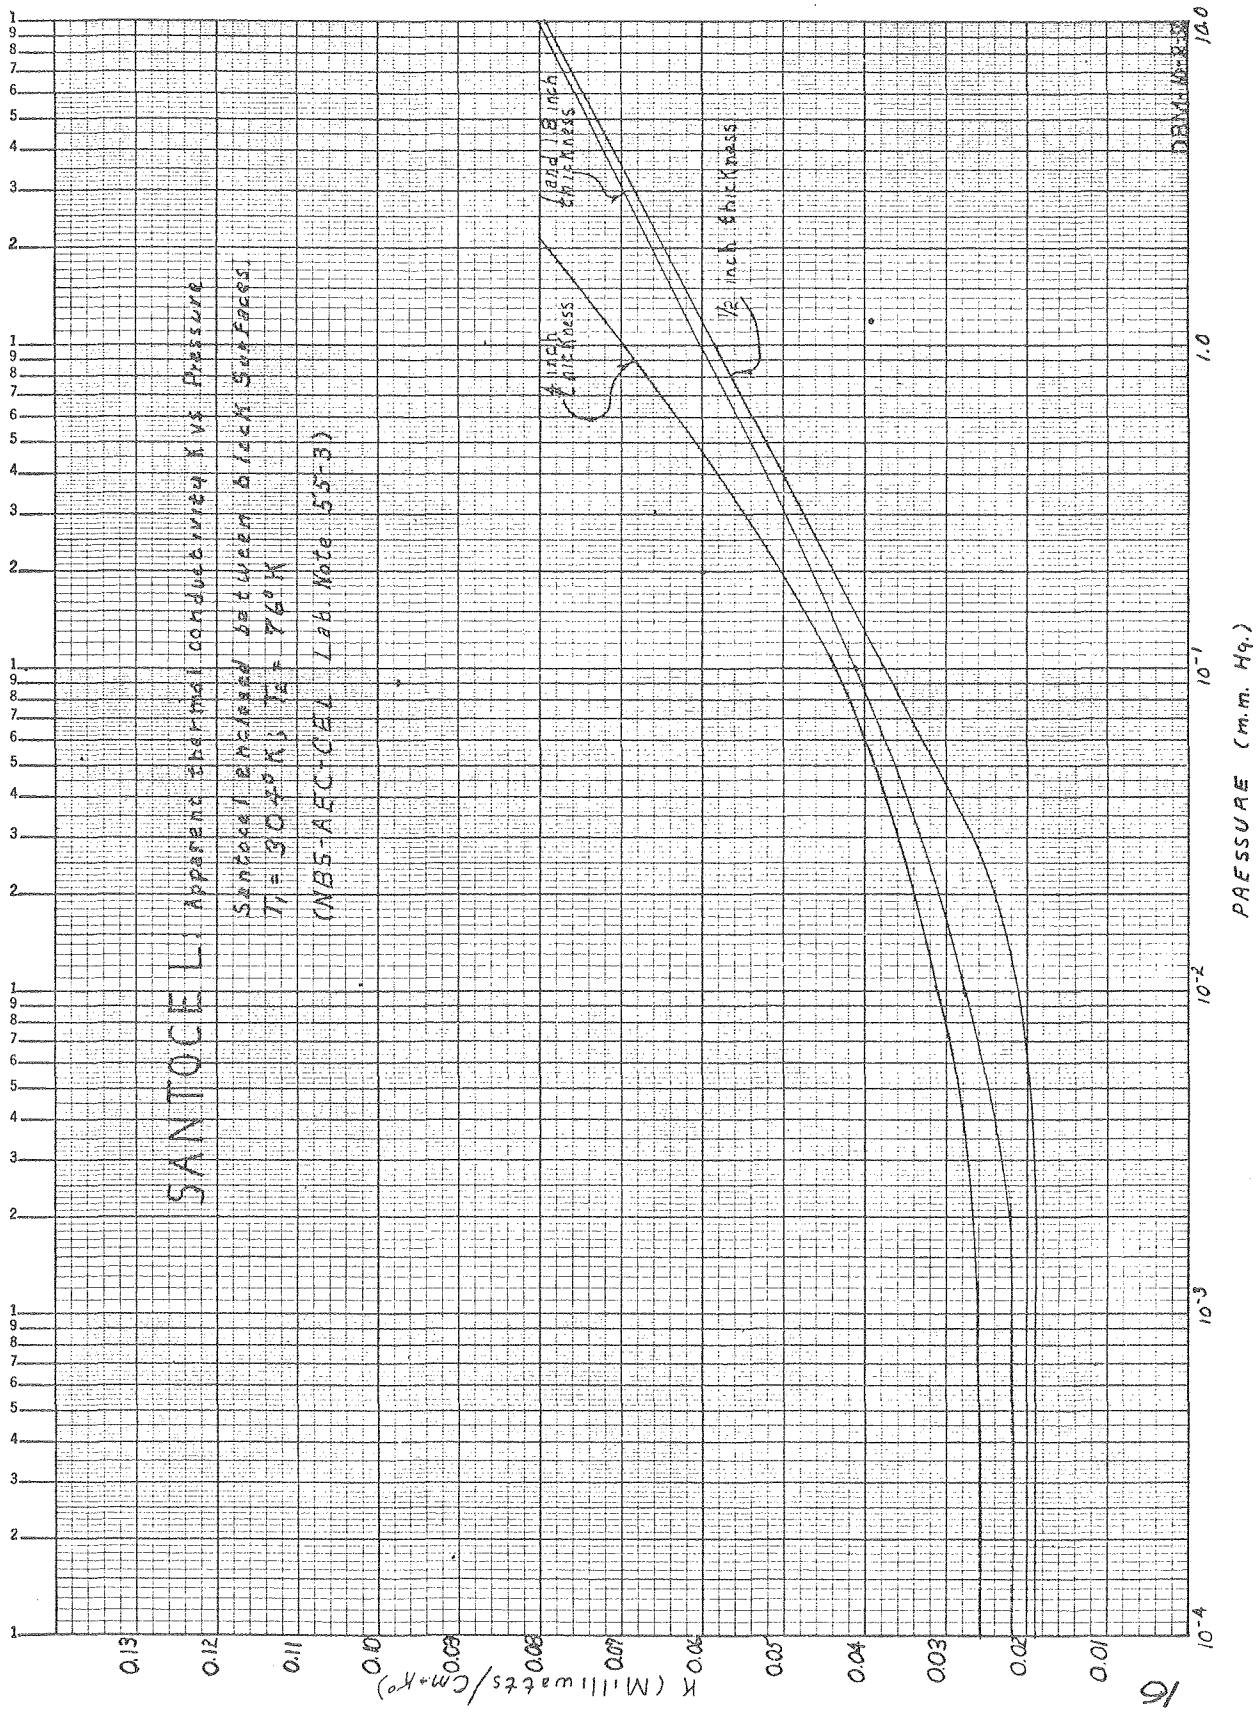
SANTOCEL: Apparent thermal conductivity K vs Pressure
Santocel enclosed between block surfaces.
T_1 = 304°K; T_2 = 76°K
(NBS-AEC-CEL Lab. Note 55-3)
1 and 1.8 inch thickness
1/2 inch thickness
1/4 inch thickness
PRESSURE (m.m. Hg.)
K (Milliwatts/Cm-K°)
0.13
0.12
0.11
0.10
0.09
0.08
0.07
0.06
0.05
0.04
0.03
0.02
0.01
10.0
1.0
10^{-1}
10^{-2}
10^{-3}
10^{-4}

16

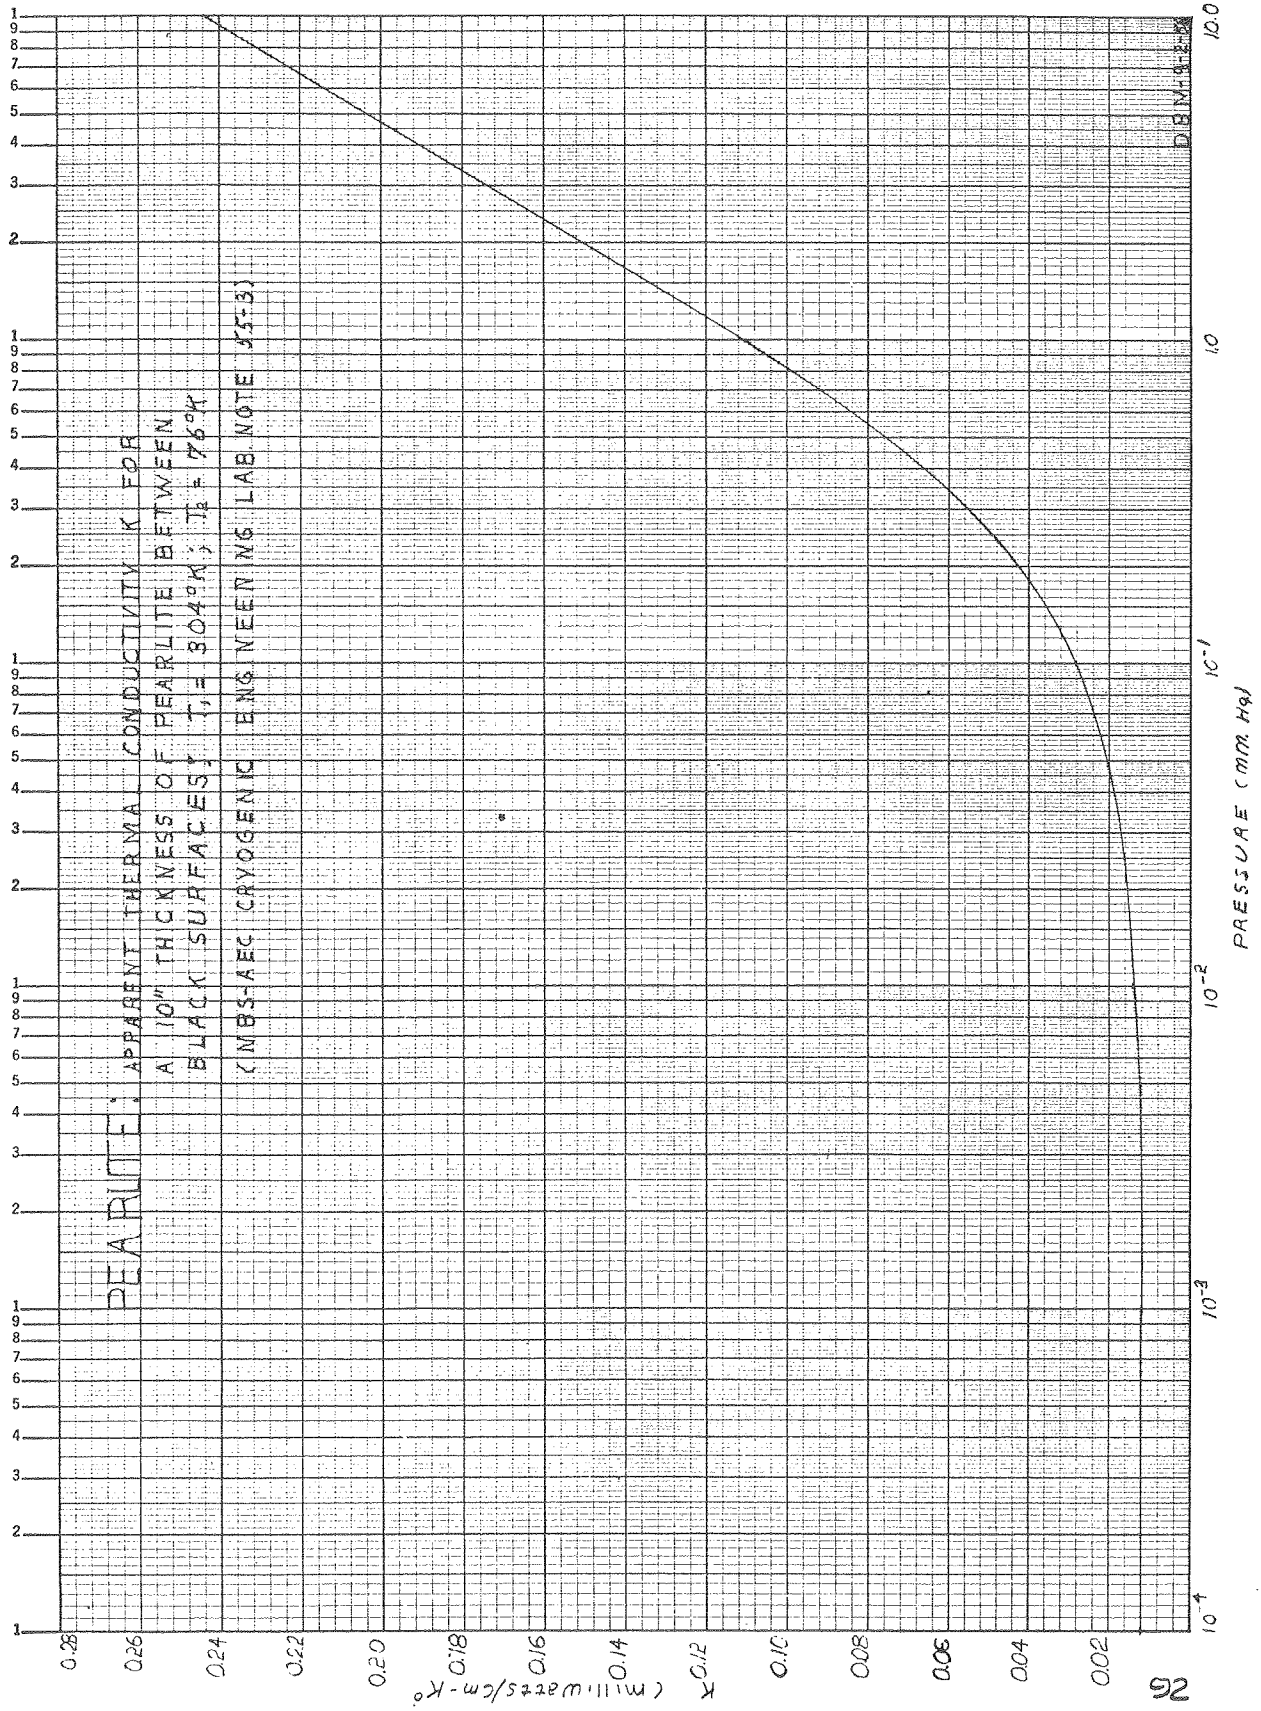
PEARLITE: APPARENT THERMAL CONDUCTIVITY K FOR
A 10" THICKNESS OF PEARLITE BETWEEN
BLACK SURFACES; T_1 = 304°K; T_2 = 76°K
(NBS-AEC CRYOGENIC ENGINEERING LAB NOTE 55-3)
PRESSURE (mm Hg)
K (milliwatts/cm-K°)
0.28
0.26
0.24
0.22
0.20
0.18
0.16
0.14
0.12
0.10
0.08
0.06
0.04
0.02
10.0
1.0
10^{-1}
10^{-2}
10^{-3}
10^{-4}

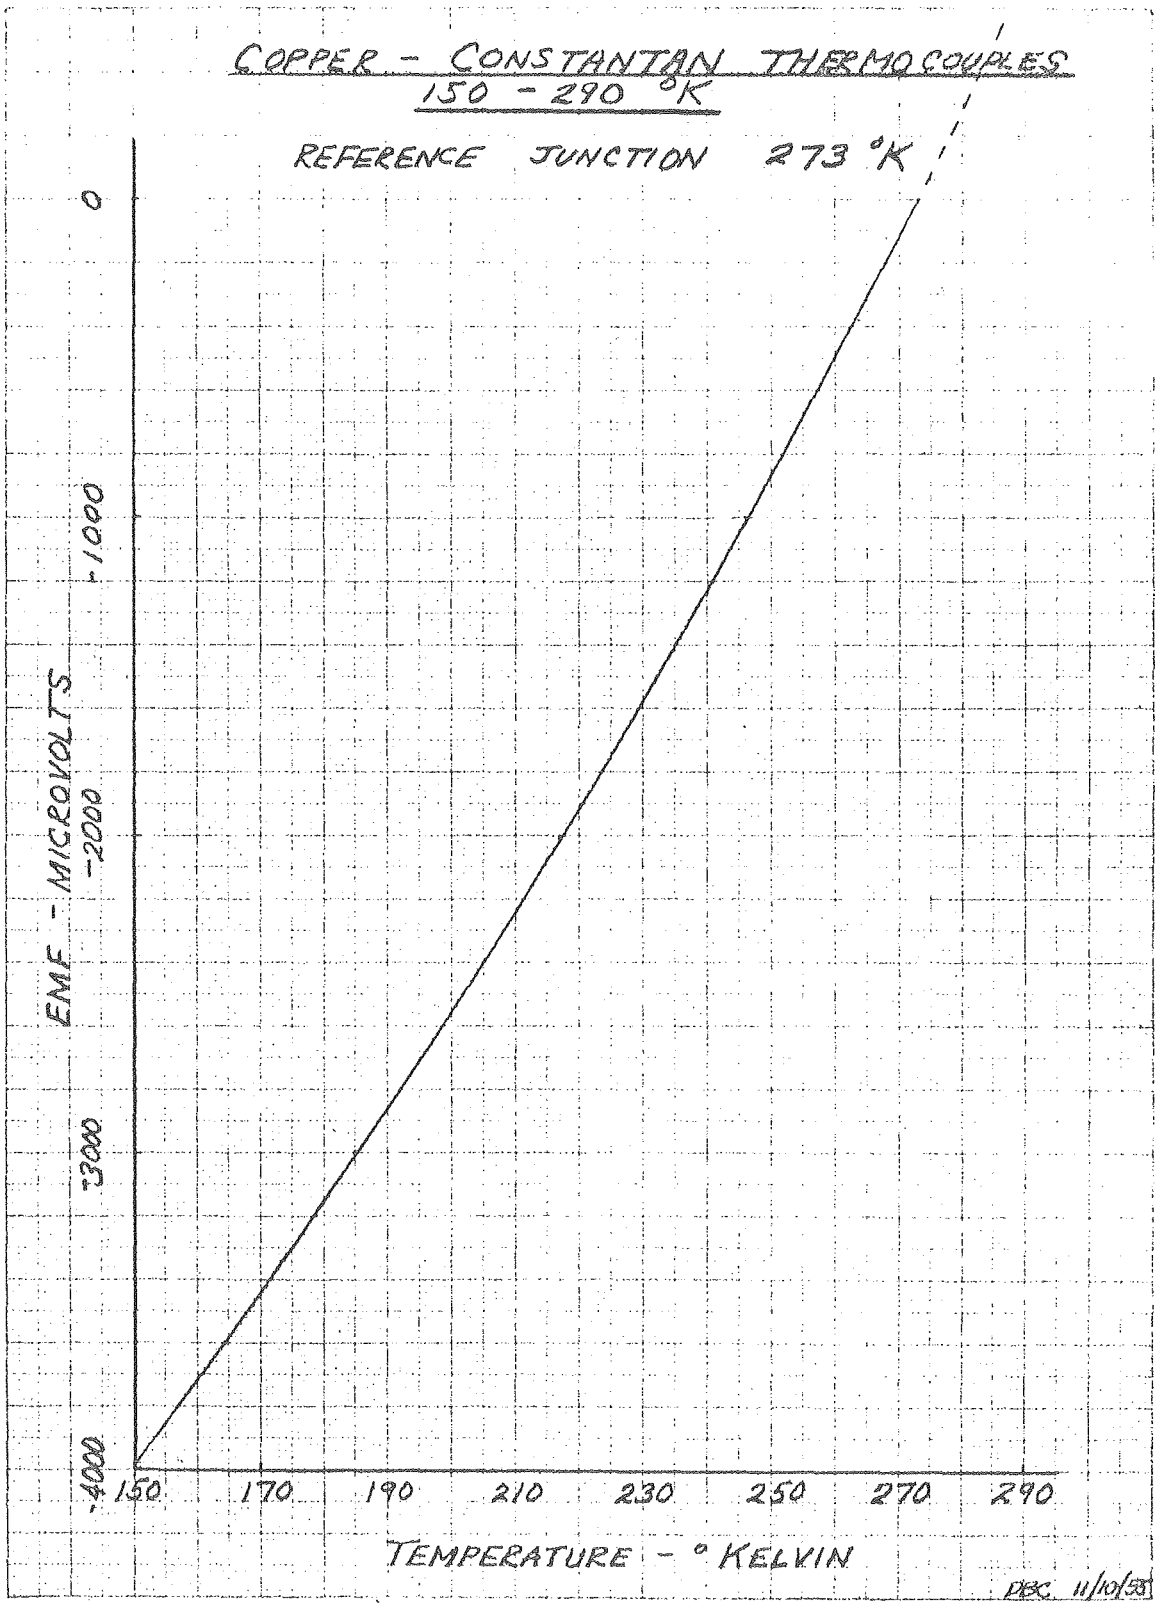
COPPER - CONSTANTAN THERMOCOUPLES
150 - 290 °K
REFERENCE JUNCTION 273 °K
EMF - MICROVOLTS
0
-1000
-2000
-3000
-4000
150
170
190
210
230
250
270
290
TEMPERATURE - ° KELVIN
DBC 11/10/53

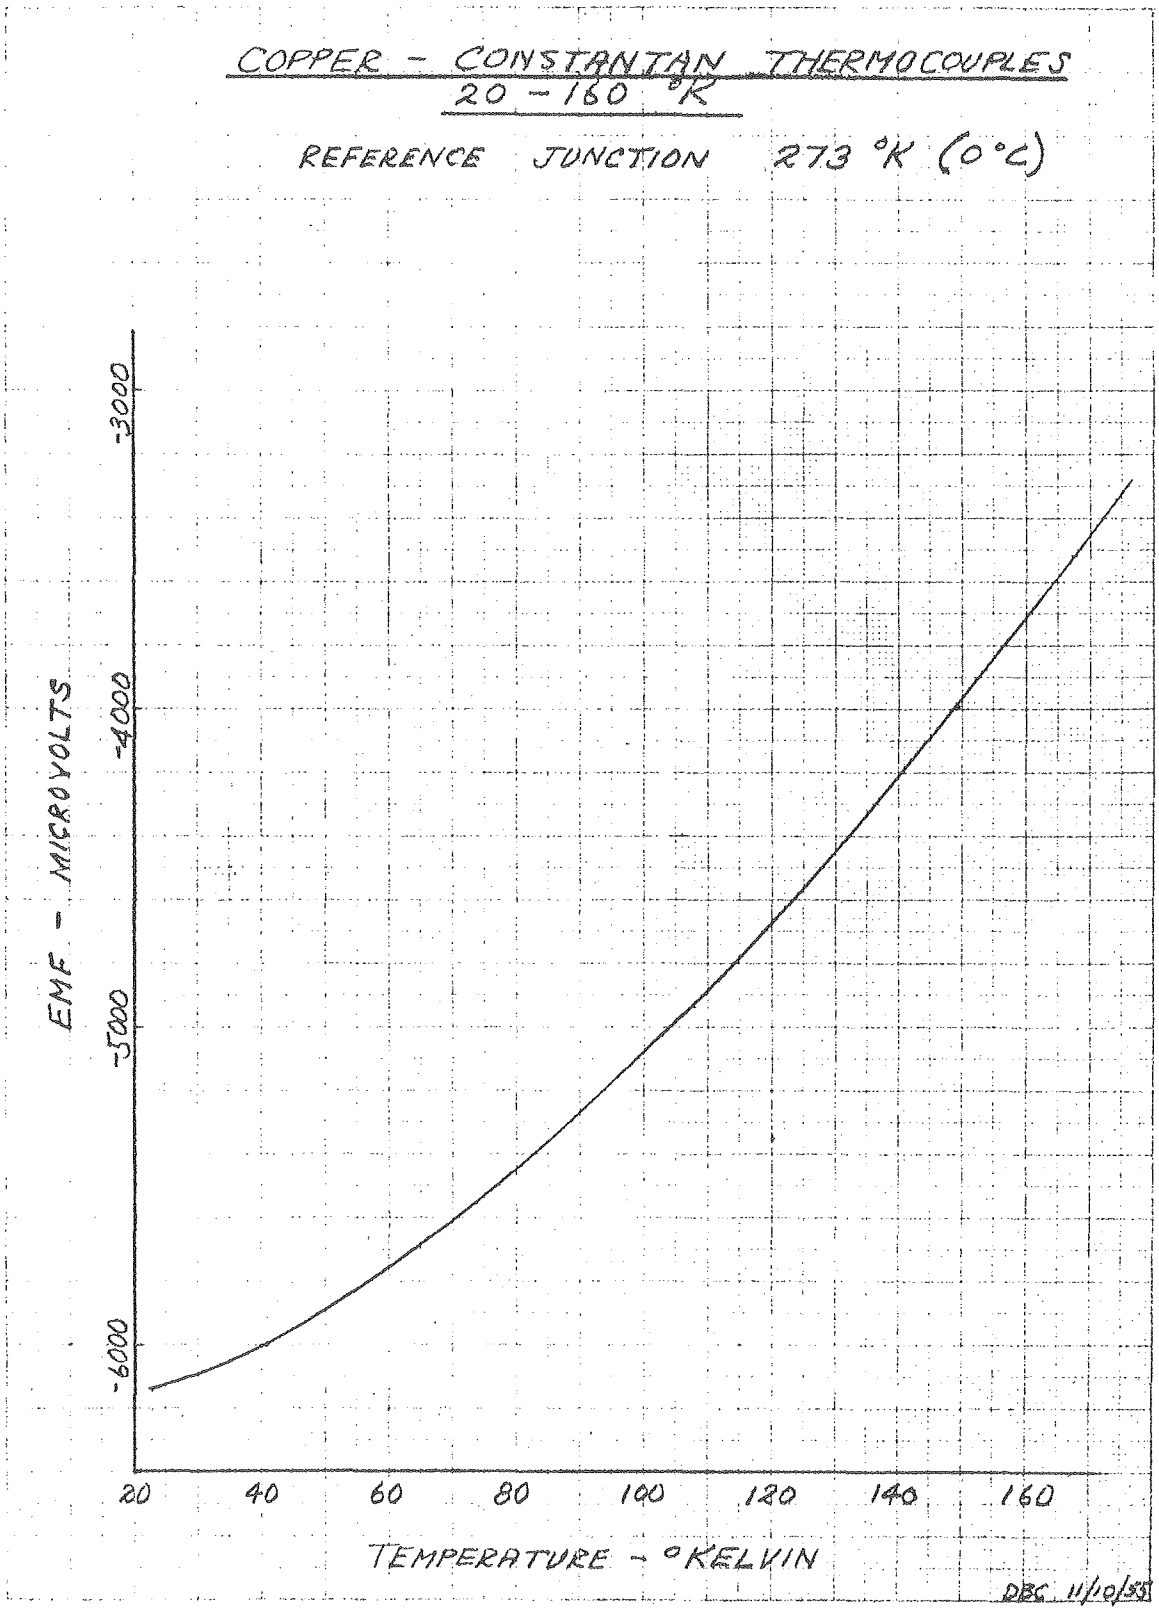
COPPER - CONSTANTAN THERMOCOUPLES
20 - 160 °K
REFERENCE JUNCTION 273 °K (0°C)
EMF - MICROVOLTS
-3000
-4000
-5000
-6000
20
40
60
80
100
120
140
160
TEMPERATURE - °KELVIN
DBC 11/10/55

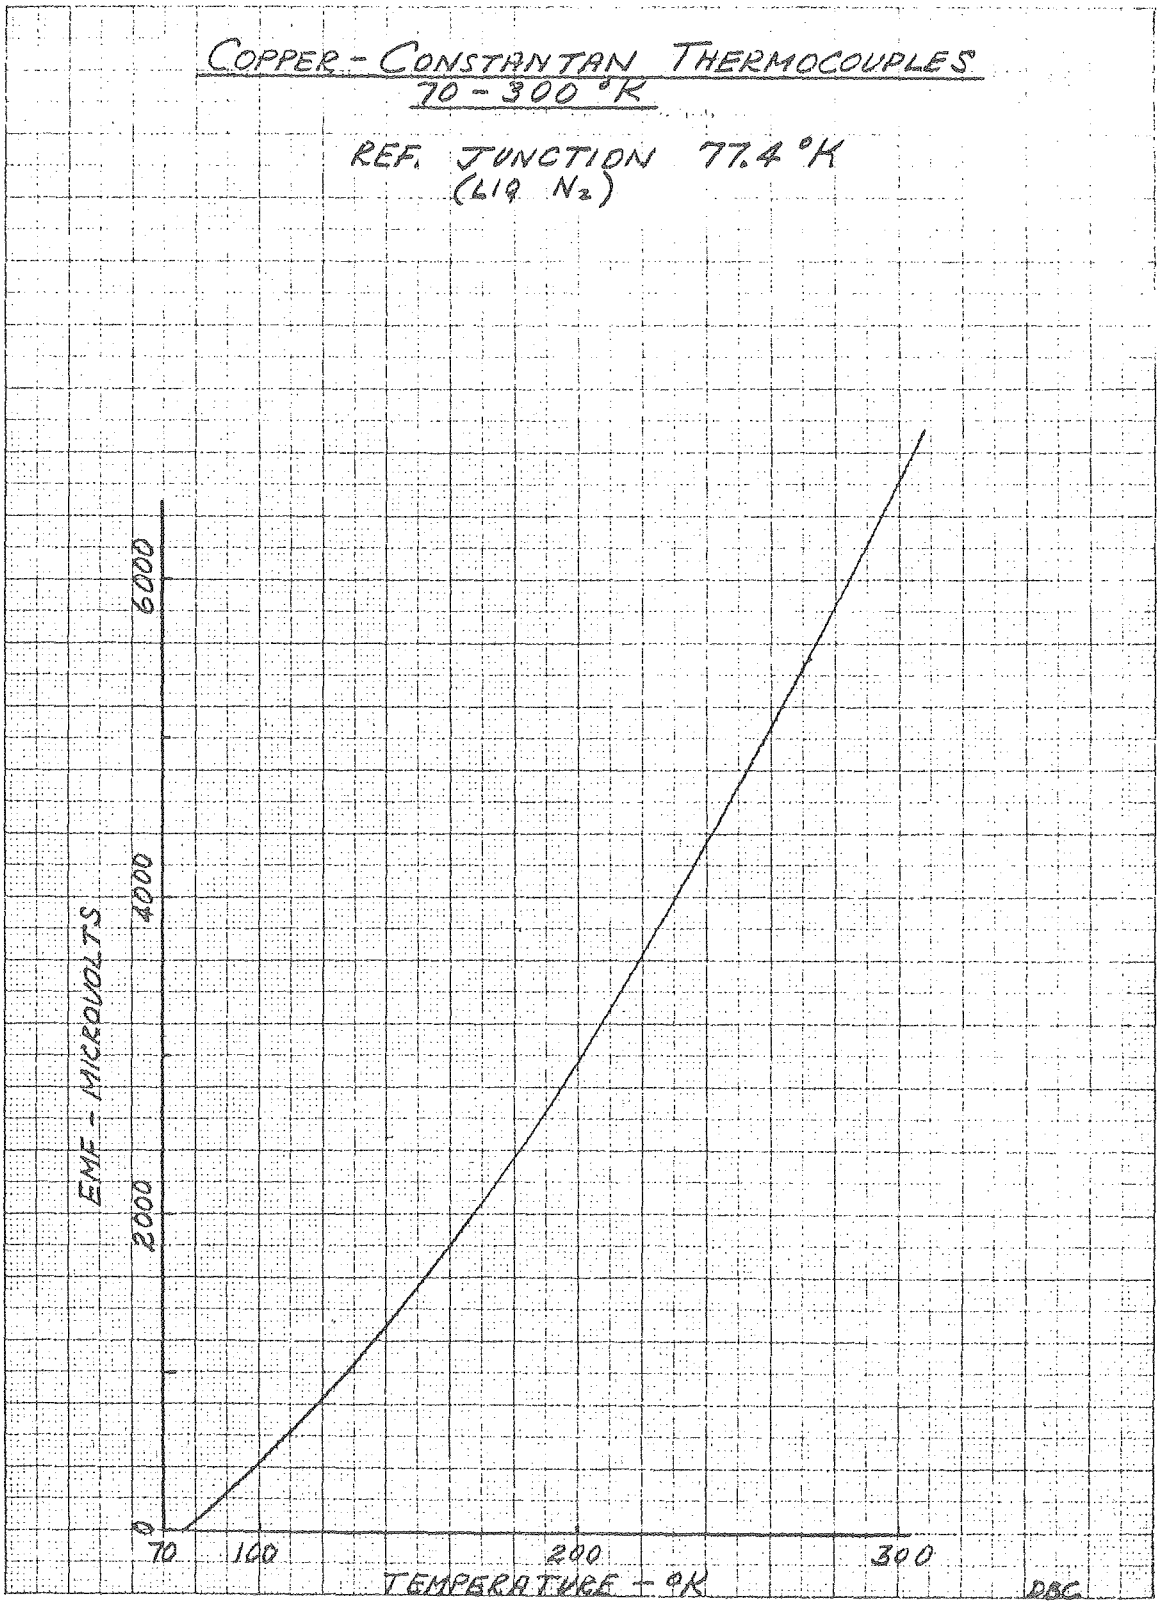
COPPER - CONSTANTAN THERMOCOUPLES
70 - 300 °K
REF. JUNCTION 77.4 °K
(LIQ N2)
EMF - MICROVOLTS
0
2000
4000
6000
70
100
200
300
TEMPERATURE - °K
DBC

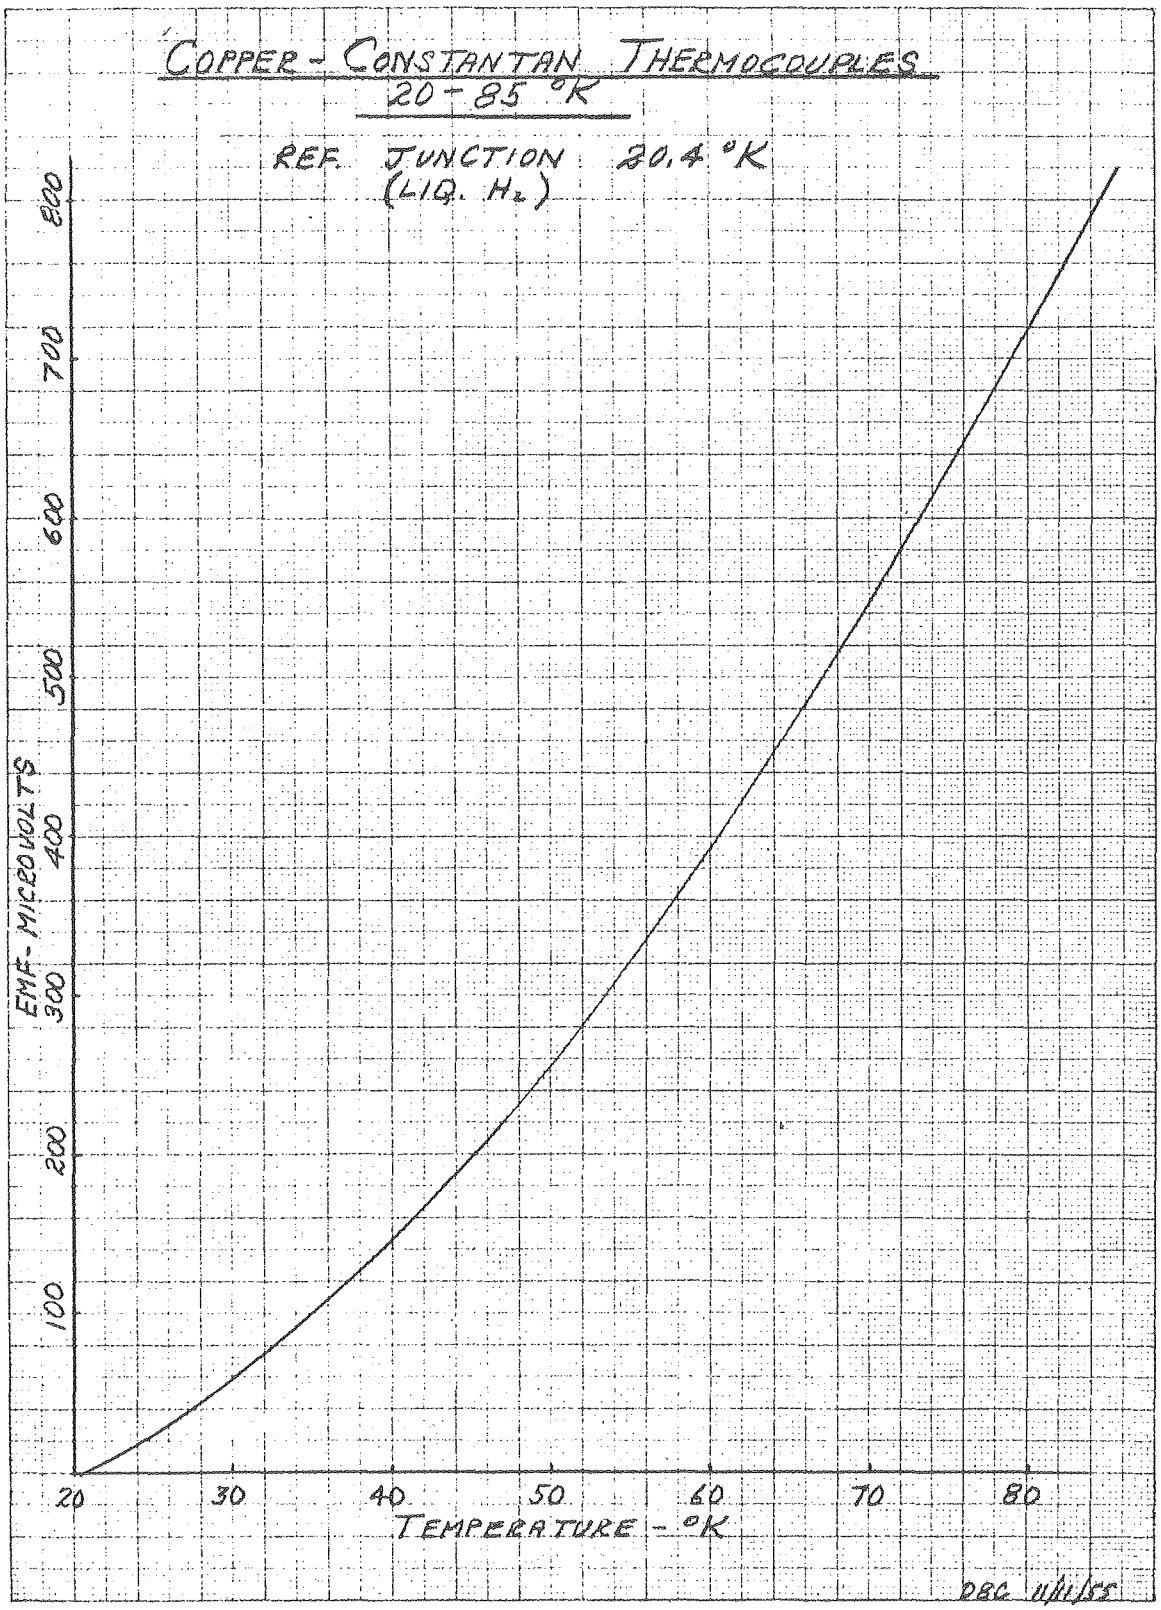
COPPER - CONSTANTAN THERMOCOUPLES
20 - 85 °K
REF. JUNCTION 20.4 °K
(LIQ. H2)
EMF - MICROVOLTS
100
200
300
400
500
600
700
800
20
30
40
50
60
70
80
TEMPERATURE - °K
DBC 11/11/55

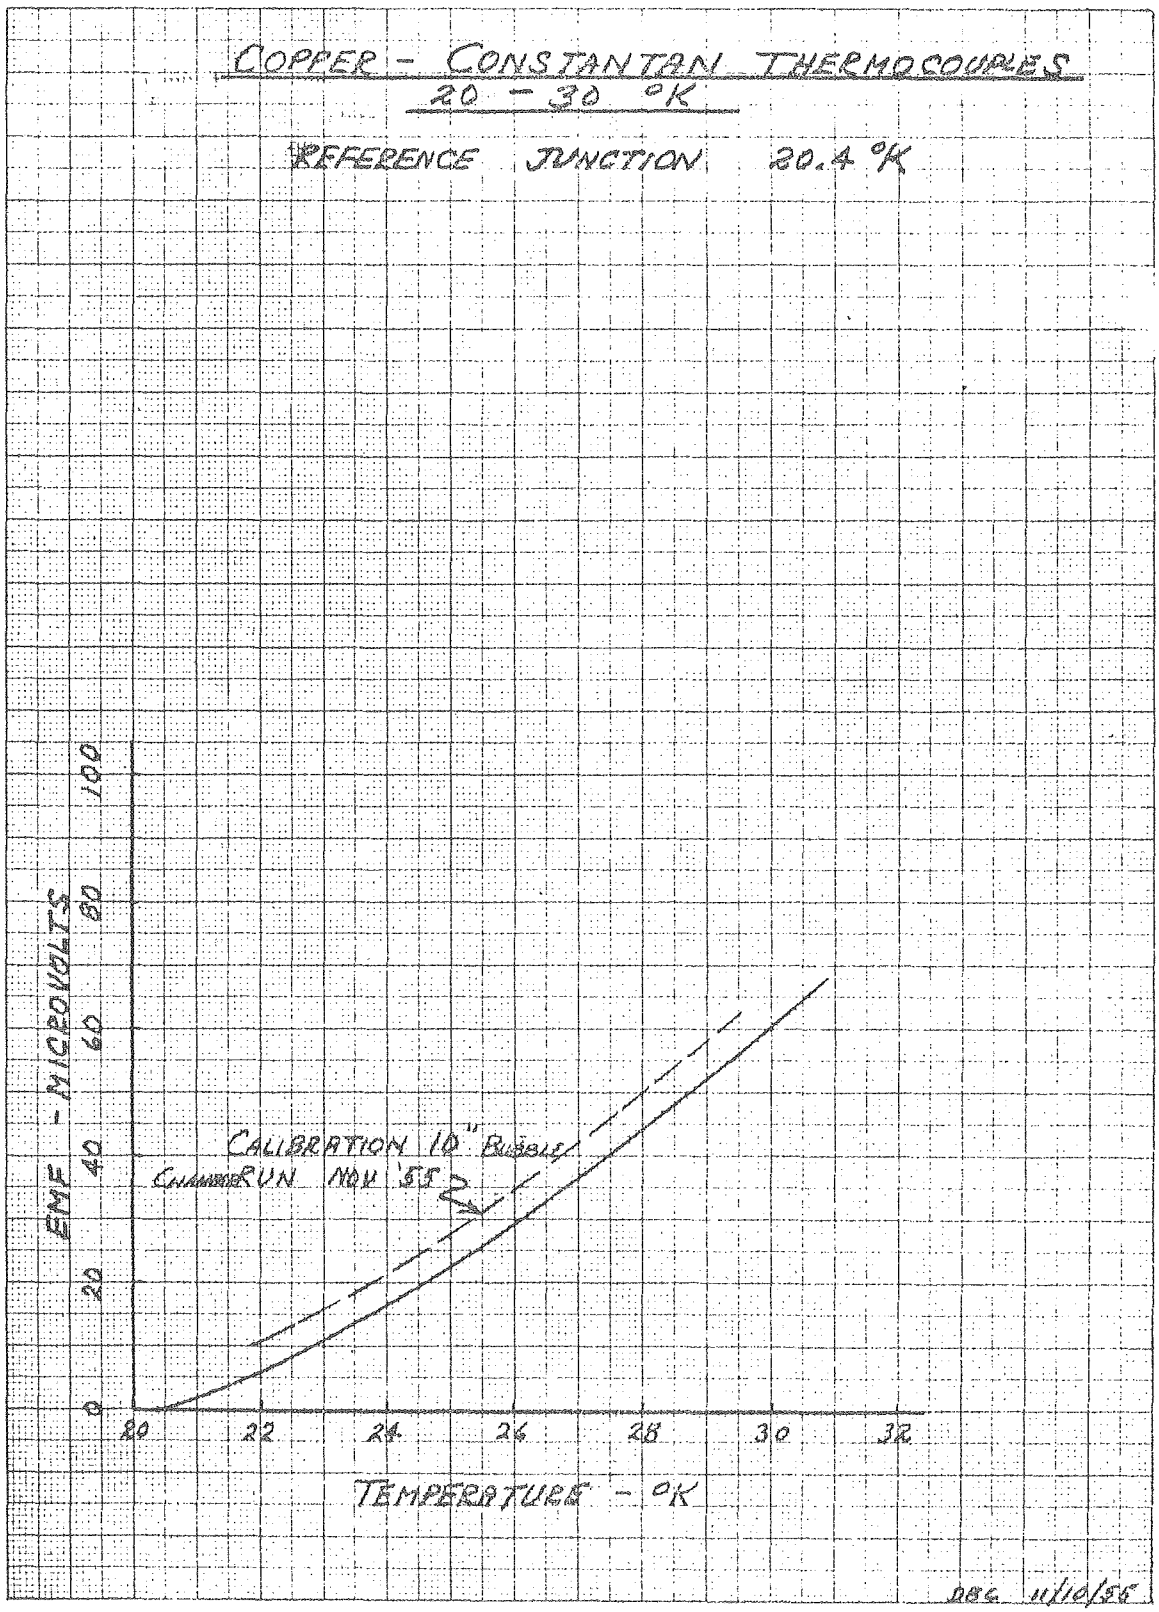
COPPER - CONSTANTAN THERMOCOUPLES
20 - 30 °K
REFERENCE JUNCTION 20.4 °K
EMF - MICROVOLTS
0
20
40
60
80
100
20
22
24
26
28
30
32
TEMPERATURE - °K
CALIBRATION 10" BUBBLE
RUN NOV '55
DBC 11/10/56

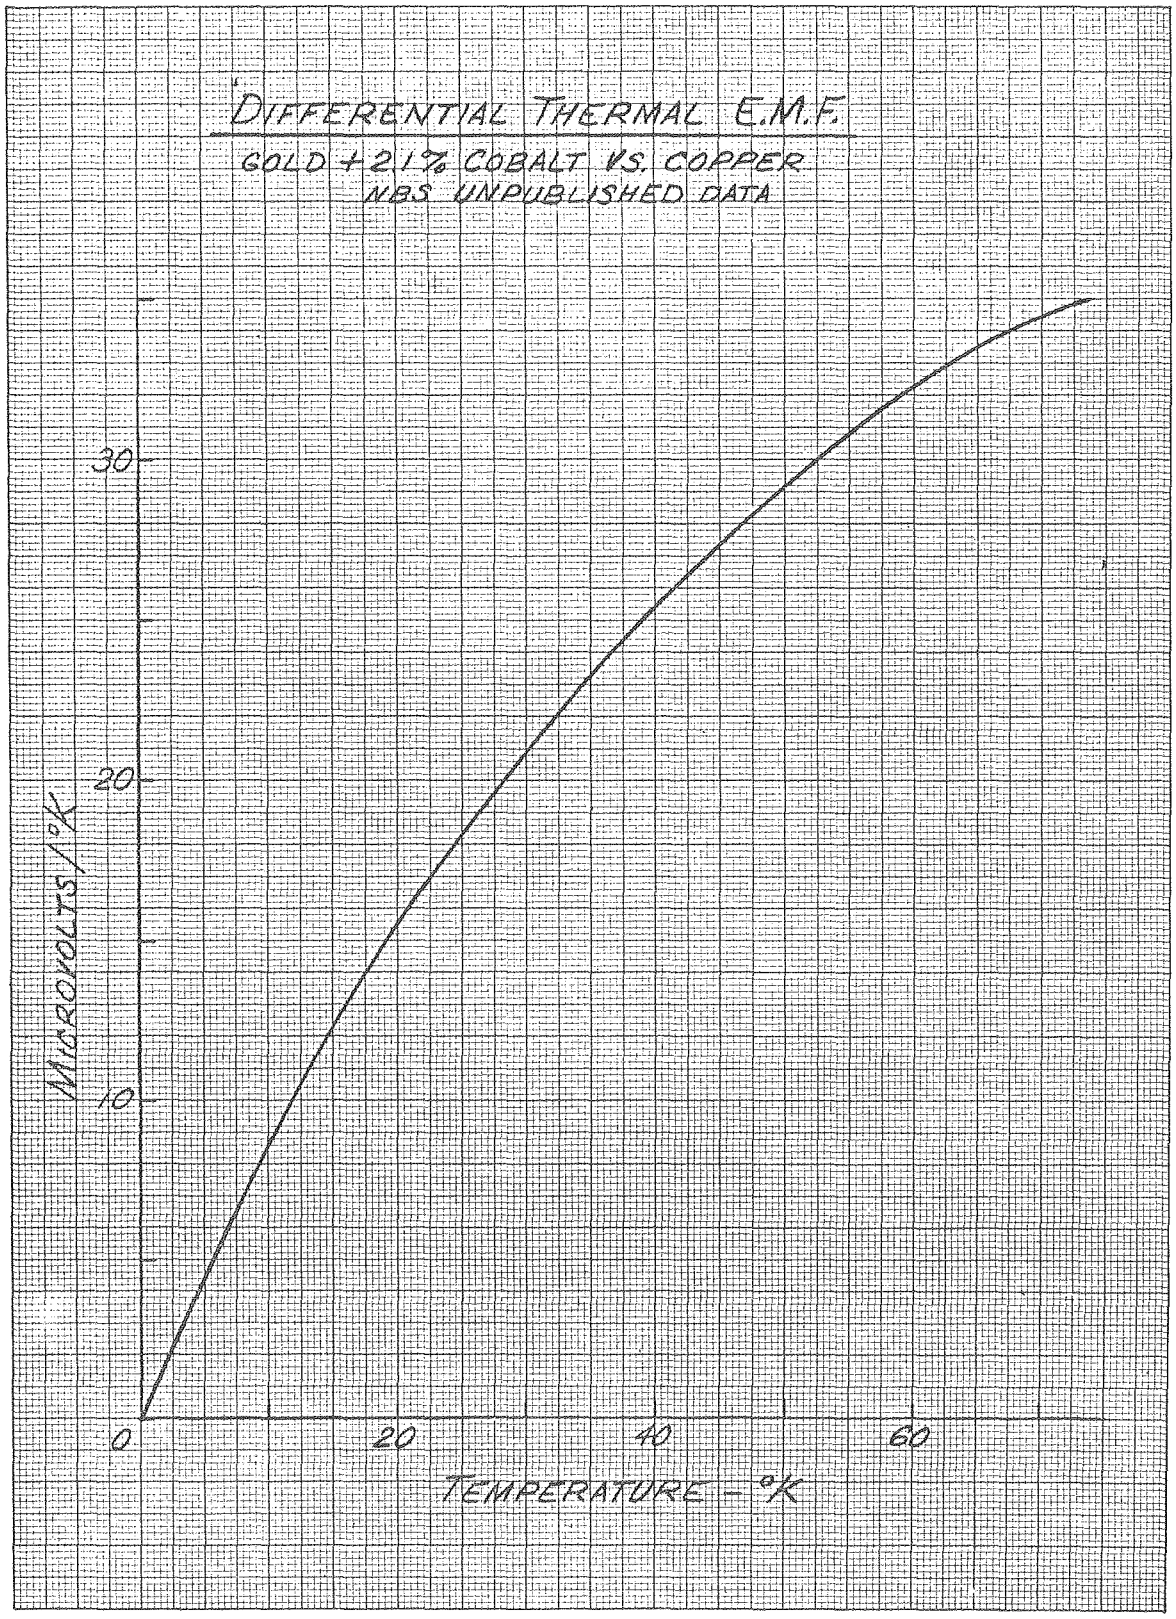
DIFFERENTIAL THERMAL E.M.F.
GOLD + 2.1% COBALT VS. COPPER
NBS UNPUBLISHED DATA
MICROVOLTS/°K
30
20
10
0
20
40
60
TEMPERATURE - °K

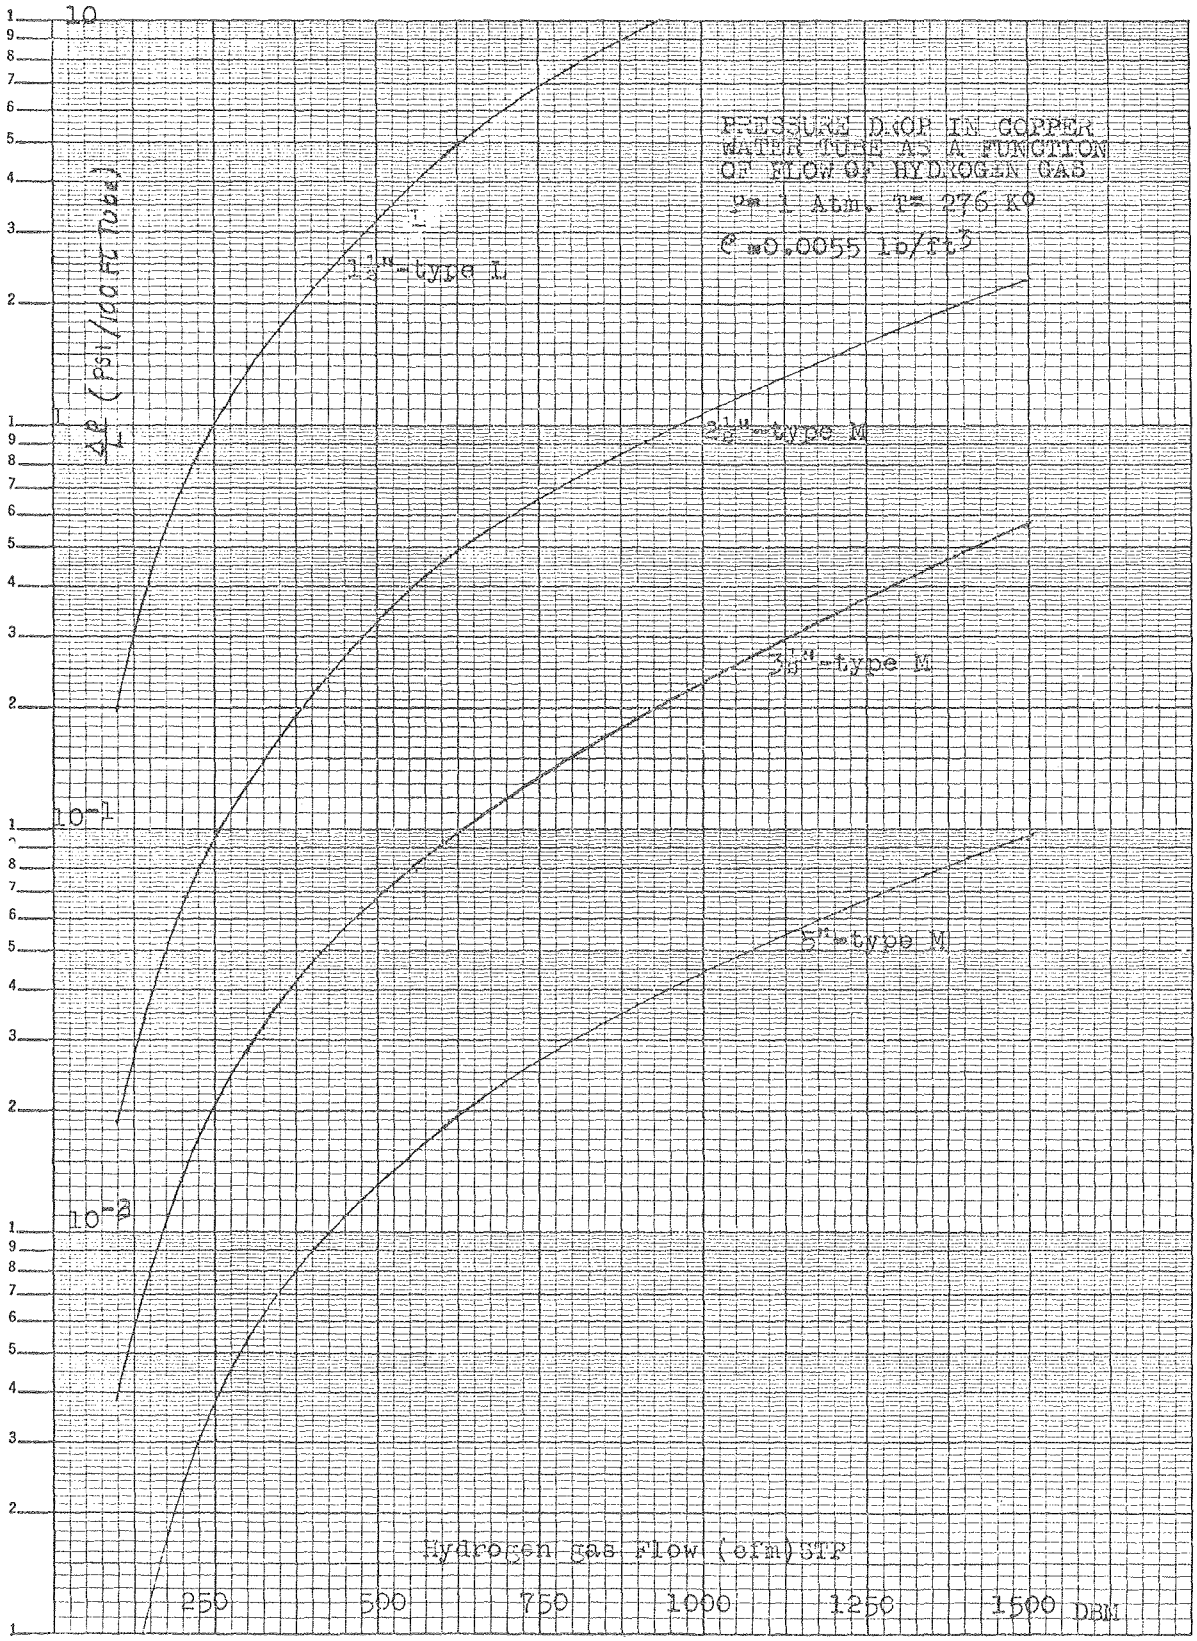
PRESSURE DROP IN COPPER WATER TUBE AS A FUNCTION OF FLOW OF HYDROGEN GAS
P = 1 Atm. T = 276 K°
ρ = 0.0055 lb/ft³
ΔP (psi/100 ft Tube)
10
1
10⁻¹
10⁻²
2½"-type L
2½"-type M
3½"-type M
5"-type M
Hydrogen Gas Flow (cfm) STP
250
500
750
1000
1250
1500 DBM

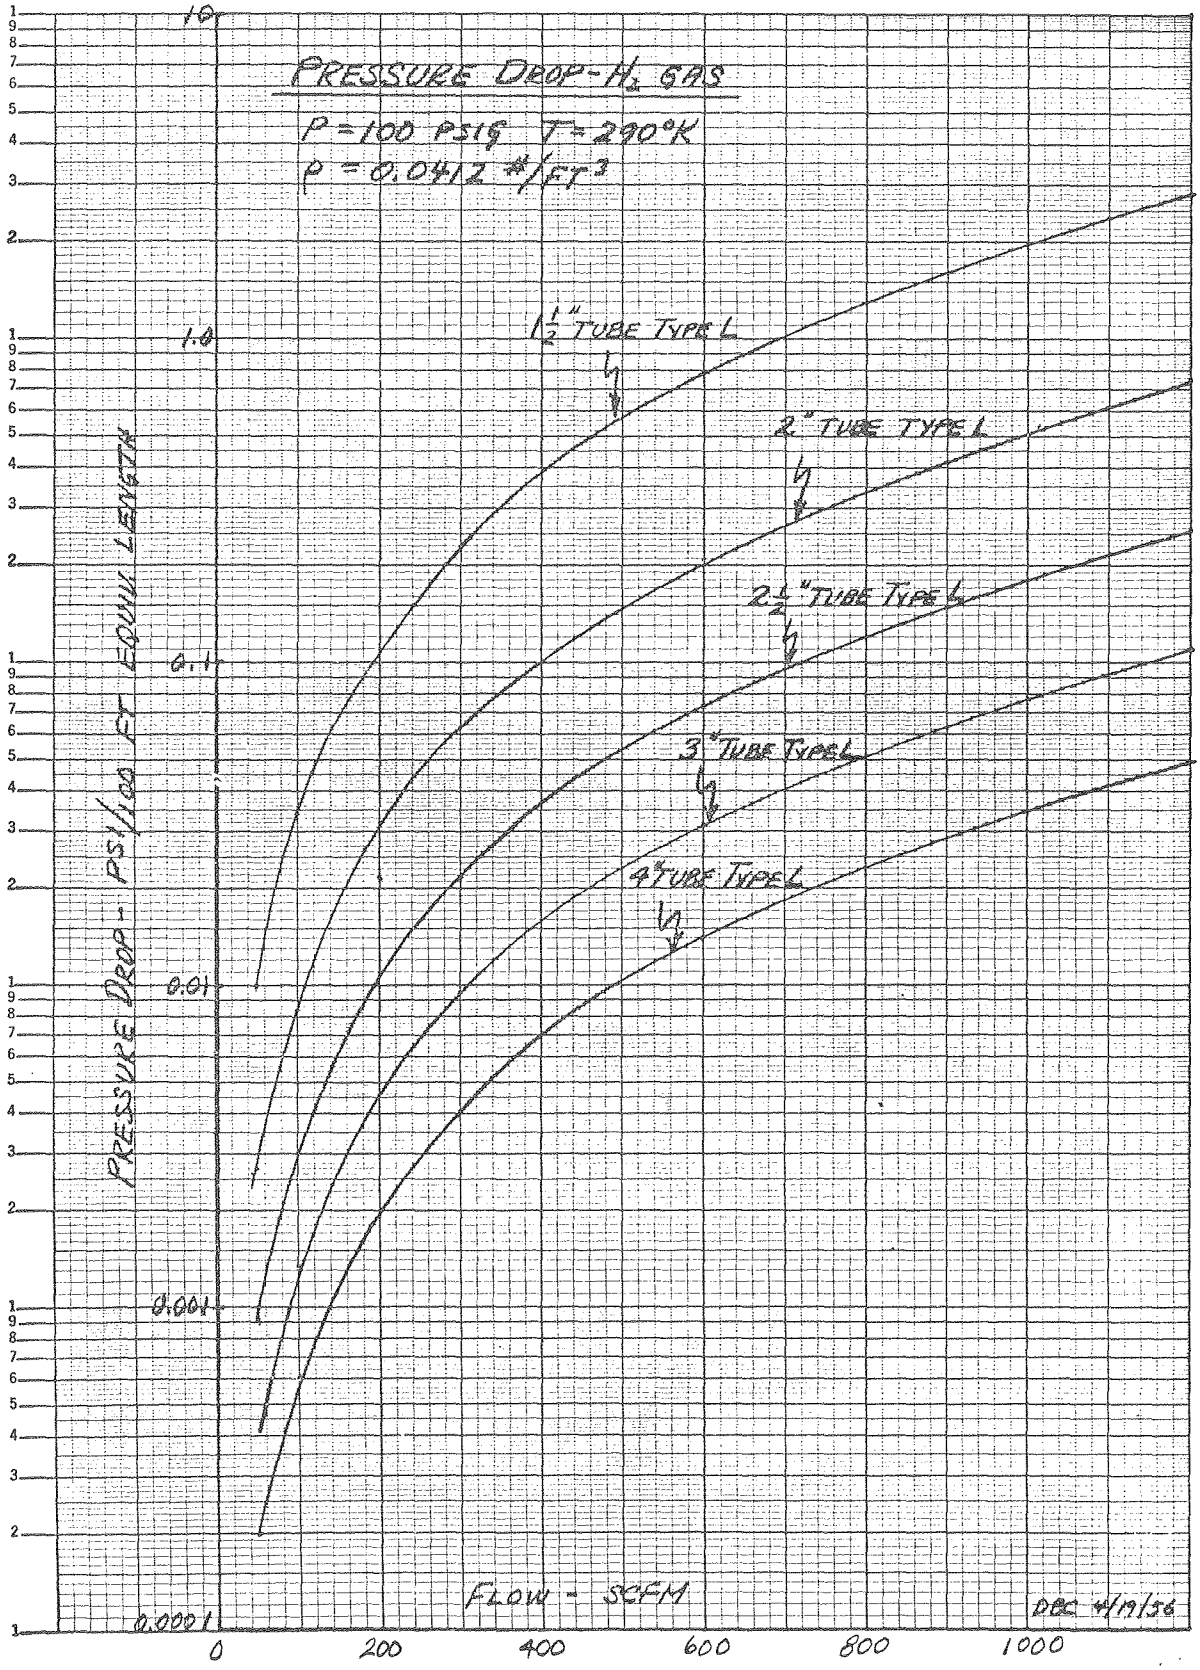
PRESSURE DROP - H_2 GAS
P = 100 PSIG T = 290°K
ρ = 0.0412 #/FT³
1½" TUBE TYPE L
2" TUBE TYPE L
2½" TUBE TYPE L
3" TUBE TYPE L
4" TUBE TYPE L
PRESSURE DROP - PSI/100 FT EQUIV. LENGTH
10
1.0
0.1
0.01
0.001
0.0001
FLOW - SCFM
0
200
400
600
800
1000
DEC 4/19/56

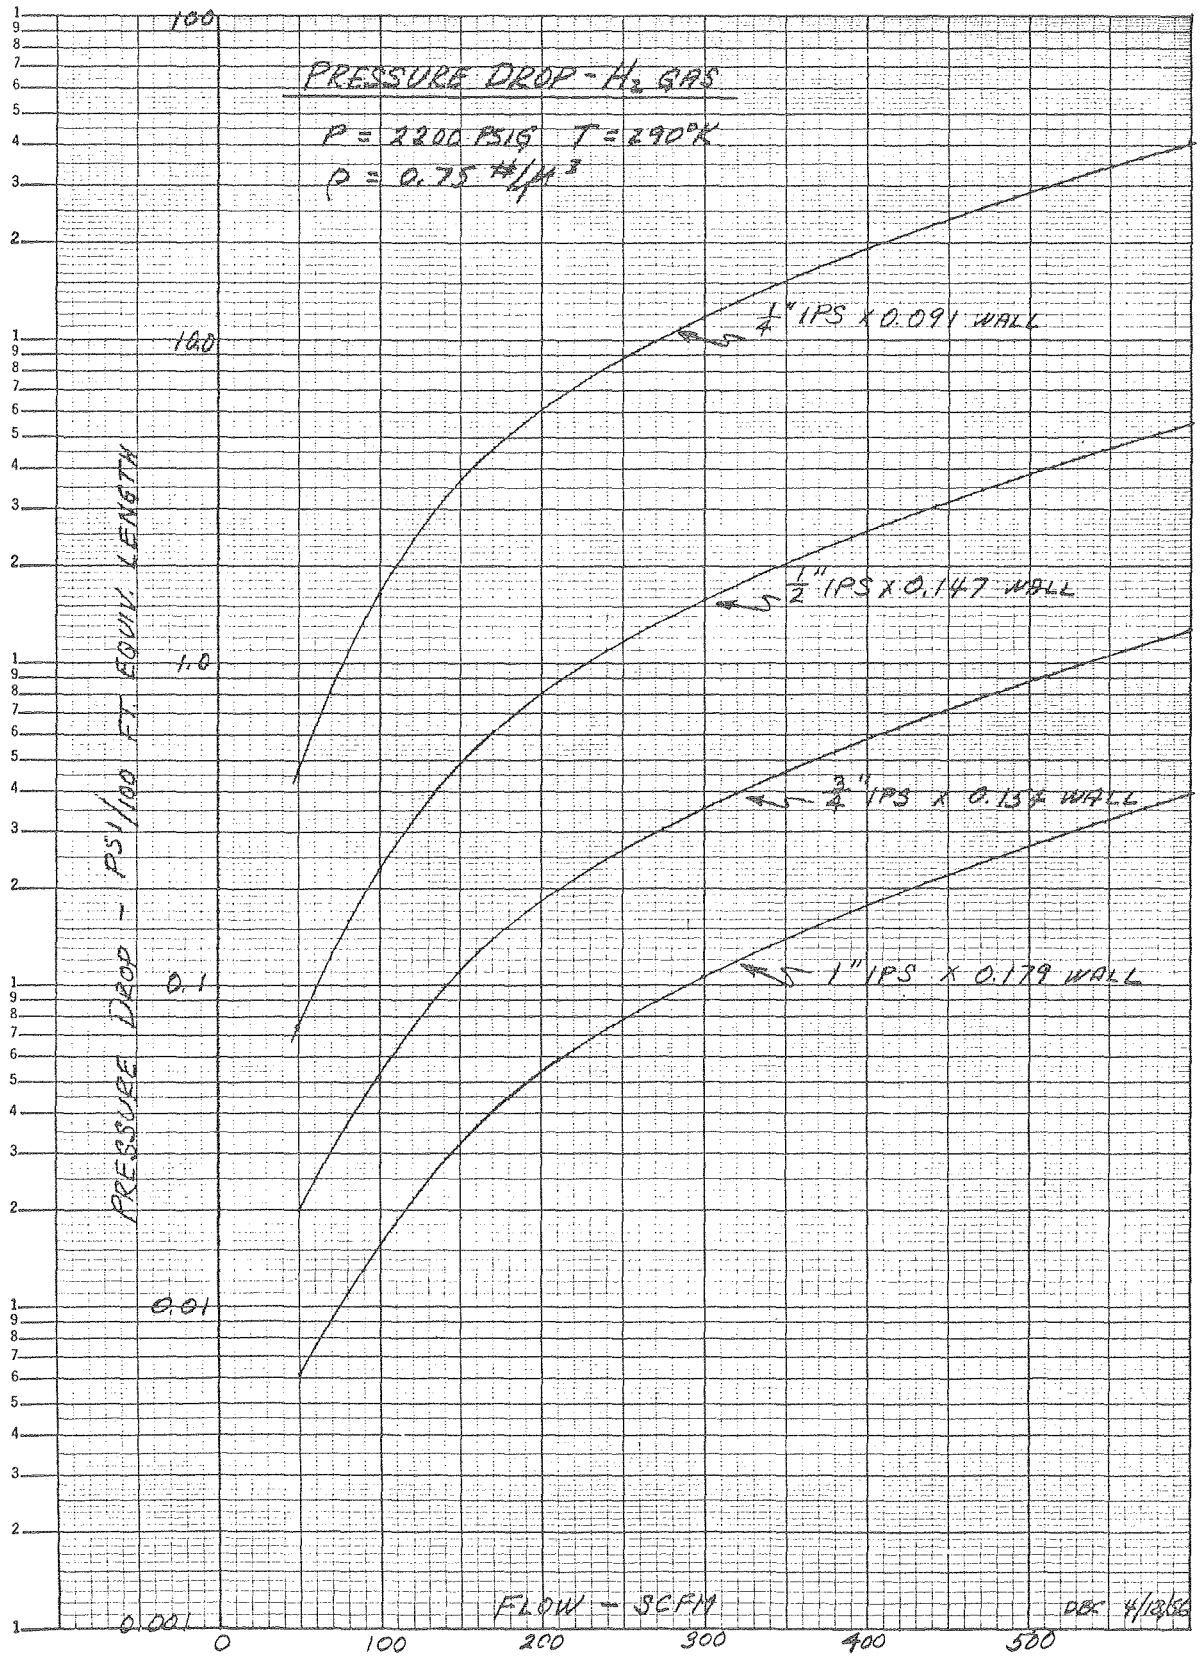
PRESSURE DROP - H_2 GAS
P = 2200 PSIG T = 290°K
ρ = 0.75 #/ft³
1/4" IPS x 0.091 WALL
1/2" IPS x 0.147 WALL
3/4" IPS x 0.154 WALL
1" IPS x 0.179 WALL
PRESSURE DROP - PSI/100 FT. EQUIV. LENGTH
100
10.0
1.0
0.1
0.01
0.001
FLOW - SCFM
0
100
200
300
400
500
DBK 4/12/66

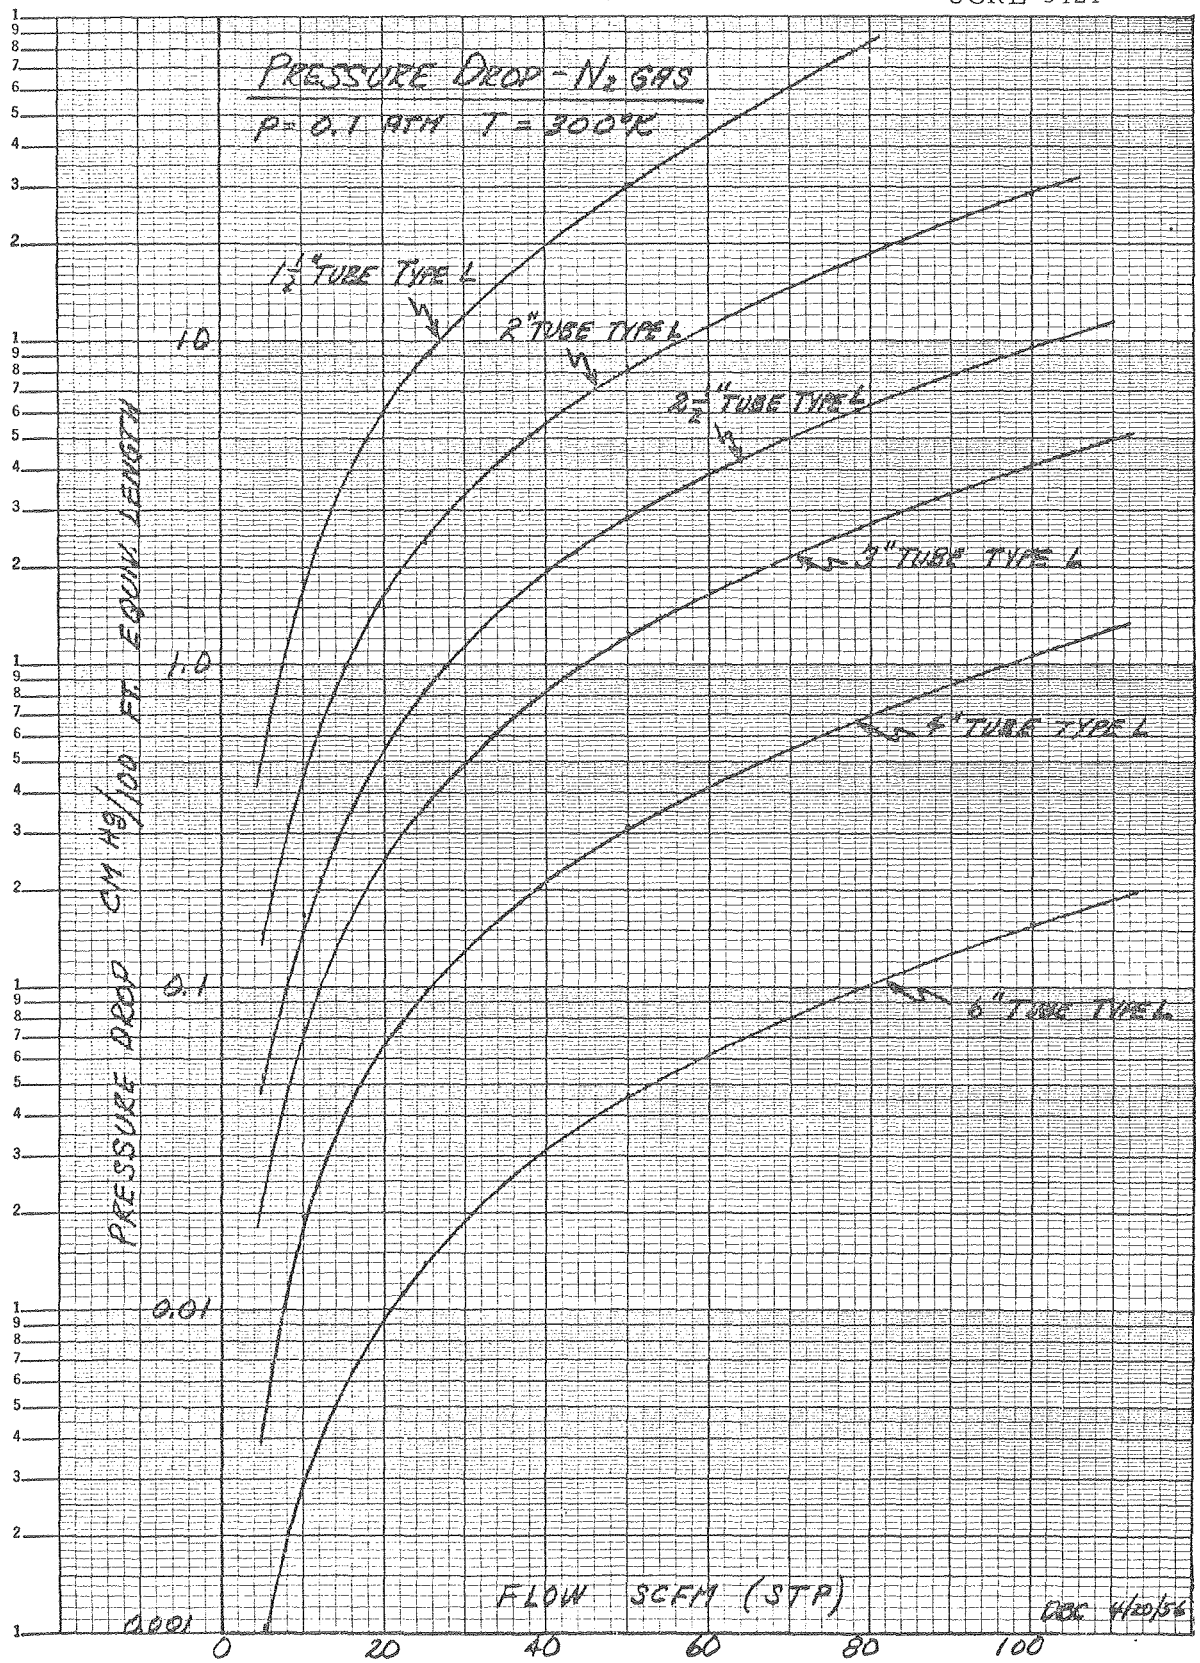
PRESSURE DROP - N2 GAS
P = 0.1 ATM T = 300°K
1½" TUBE TYPE L
2" TUBE TYPE L
2½" TUBE TYPE L
3" TUBE TYPE L
4" TUBE TYPE L
6" TUBE TYPE L
PRESSURE DROP CM Hg/100 FT. EQUIV. LENGTH
10
1.0
0.1
0.01
0.001
FLOW SCFM (STP)
0
20
40
60
80
100
DBC 4/20/56

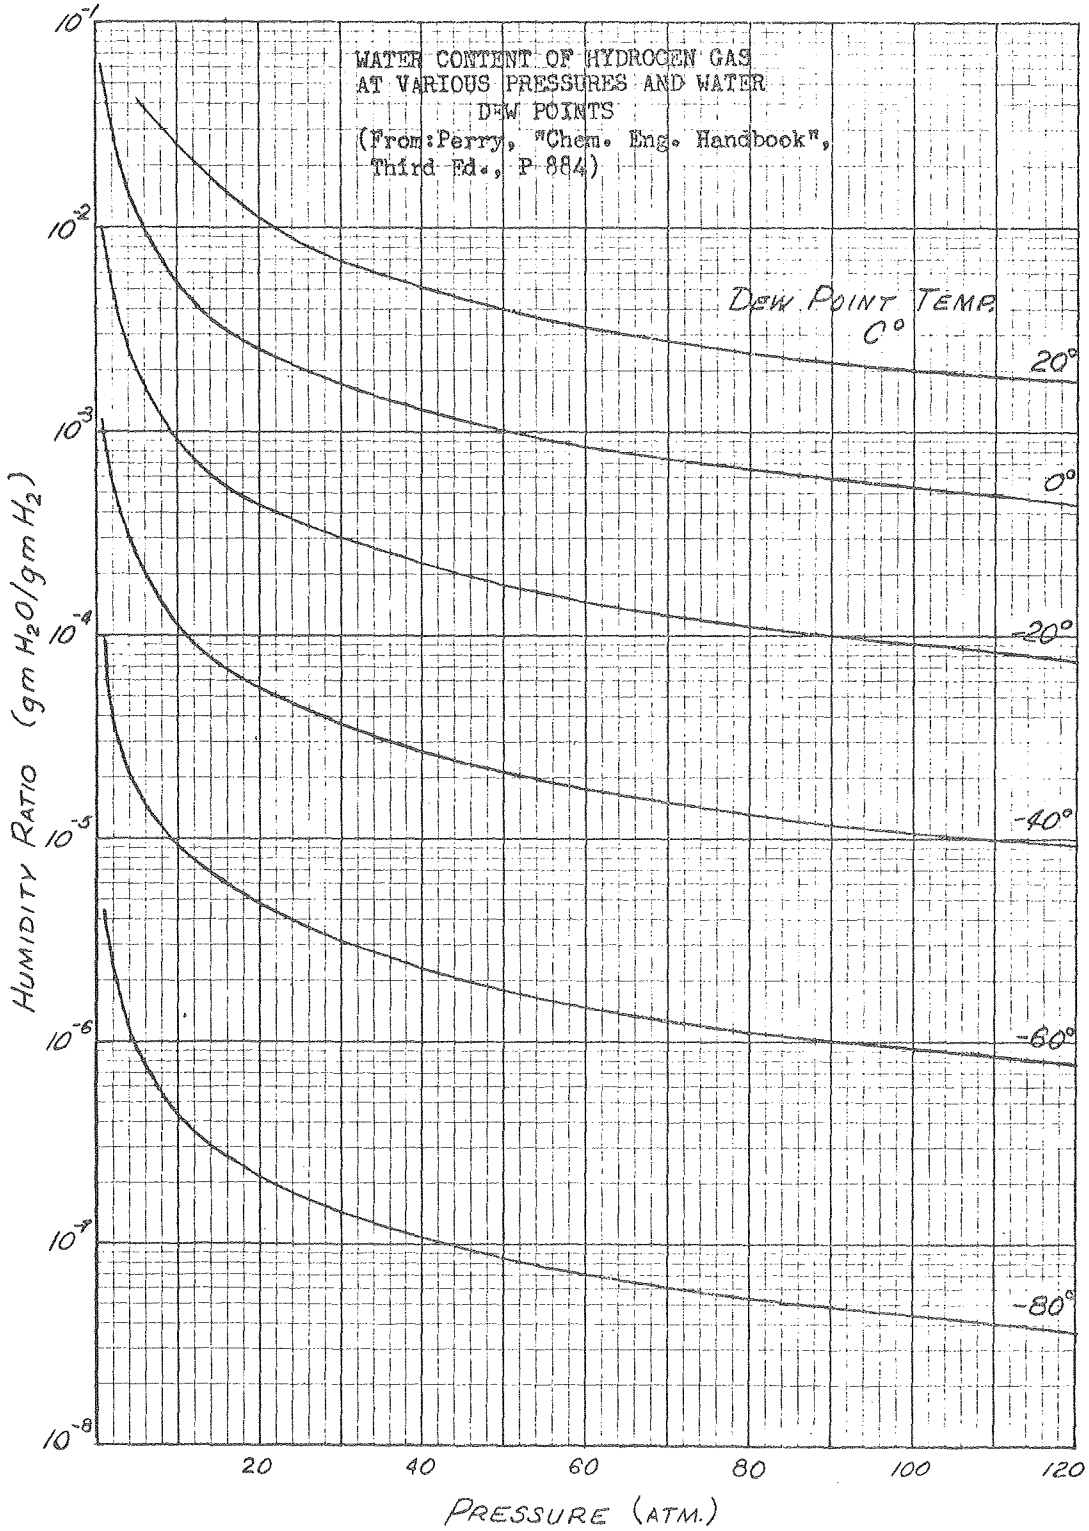
WATER CONTENT OF HYDROGEN GAS
AT VARIOUS PRESSURES AND WATER
DEW POINTS
(From: Perry, "Chem. Eng. Handbook",
Third Ed., P 884)
DEW POINT TEMP
C°
20°
0°
-20°
-40°
-60°
-80°
HUMIDITY RATIO (gm H2O/gm H2)
10^-1
10^-2
10^-3
10^-4
10^-5
10^-6
10^-7
10^-8
20
40
60
80
100
120
PRESSURE (ATM.)

STAINLESS STEEL CHARACTERISTICS

Type	302	304L	304	310	316	321	347
Carbon	~0.2	0.03	0.08	0.25	0.10	0.08	0.08
Ni	8-10	12-14	8-11	19-22	10-14	8-11	9-12
Cr	17-19	18-20	18-20	24-26	16-18	17-19	17-19
Stabilizer					MO	Ti	Cb
Nitrogen Should be limited to	0.03-0.08	→					→
Welding	poor c percip.	good	fair	good	good 1st poor 2nd	good 1st poor 2nd Ti oxidize	good
Weld after cold work		1		2			3
Hard Soldering annealed, 1st solder only	OK	→					→
Soft Solder 430 Solder recom.	poor	OK	→				→
Magnetic prop. at low temp.	L	L ~1.002 perm.	L	H ~1.02 perm.	H ~1.02 perm.	H	H ~1.02 perm.
COST $/100 lbs sheet stocks 10 ga. 36" x 120" size 2 B finish, 100 lbs-299 lbs. lots	72.75	80.75	75.50	107.00	96.50*	82.50	98.75

*316 ELC - 101.75

430 - 65.00

Note: 303 is poor material

FLUID PROPERTIES

REF: NBS TM No. 36, p. 41

Properties	Liquid Hydrogen	Liquid Nitrogen	Water	Oxygen	Freon-11	Freon-22
Heat of Vaporization (cal./gr.)	106.5	47.6	586	50.8	43.5	55.9
Vapor Pressure (mm Hg)	760	760	18.8	760	760	760
Molecular Weight (gr./gr.mole)	2	28	18	32	137.4	86.5
Specific Volume (cc/gr.)	14.1	1.24	1.00	0.871	0.673	0.706
Temperature (^{o}K)	20	77	294 (70°F)	90.13	297	232
C_p - Specific Heat (cal./gr.^{o}K)	2.3	0.49	1.00	0.405	0.210	0.255
Viscosity (centipoises)	0.0130	0.158	0.98	0.190	0.429	———

BOILING POINTS OF GASES

Gas		Boiling Point at 1 atm.			Mass Of Liquid C	Volume Of Gas (STP) Produced	Heat Of Vaporization
		C°	F°	K°	gm/liter	Cu.Ft./liter	cal/liter
Helium	He^3	-269.9	-453.8	3.2			
Helium	He^4	-268.9	-452.0	4.2	125.2	24.7	650
Hydrogen	H_2	-252.7	-422.9	20.4	70.8	27.5	7640
Deuterium	D_2	-249.5	-417.1	23.6	164	32.5	12,000
Tritium	T_2	-248.0	-414.4	25.1			
Neon	Ne	-245.9	-410.6	27.2	1204	47.3	26,300
Nitrogen	N_2	-195.8	-320.4	77.3	808	23.05	38,600
Carbon Monoxide	CO	-192.0	-313.6	81.1	793	22.4	40900
Fluorine	F_2	-187.0	-304.6	86.0	1108	23.1	47,500
Argon	A	-185.7	-302.3	87.4	1410	27.9	56300
Oxygen	O_2	-183.0	-297.4	90.1	1140	28.2	58,100
Methane	CH_4	-161.4	-258.5	111.7	415	20.5	50,500
Krypton	Kr	-151.8	-241.1	121.3	2155	20.5	59,400
Xenon	Xe	-109.1	-164.4	164.0	3520	21.2	83,400
Ethylene	C_2H_4	-103.8	-154.8	169.3	566	16.1	65,000
Nitrous Oxide	N_2O	- 90.7	-129.1	183.6	1226	22.5	110,000
Ethane	C_2H_6	- 88.3	-126.9	184.8	547	14.3	64,000
Acetylene*	C_2H_2	- 84.0	-119.2	189.1	620.8	18.7	
Carbon Dioxide*	CO_2	- 78.5	-109.3	194.6	1560	27.8	214,000
Propylene	C_3H_6	- 47.0	- 52.6	226.1			
Propane	C_3H_8	- 42.3	- 44.1	230.8			
Ketene	C_2H_2O	- 41.0	- 41.8	232.1			
Freon 22	$CHClF_2$	- 40.6	- 41.0	232.5			
Ammonia	NH_3	- 33.3	- 27.9	239.8			
Freon 12	CCl_2F_2	- 30.0	- 22.0	243.1			
Methyl Chloride	CH_3Cl	- 23.7	- 10.7	249.4			
Isobutane	$(CH_3)_2C_2H_4$	- 10.2	13.6	262.9			
Sulphur Dioxide	SO_2	- 10.0	14.0	263.1			
Butane	C_4H_{10}	- 0.6	30.9	272.5			

*Sublimes

VAPOR PRESSURE OF ICE

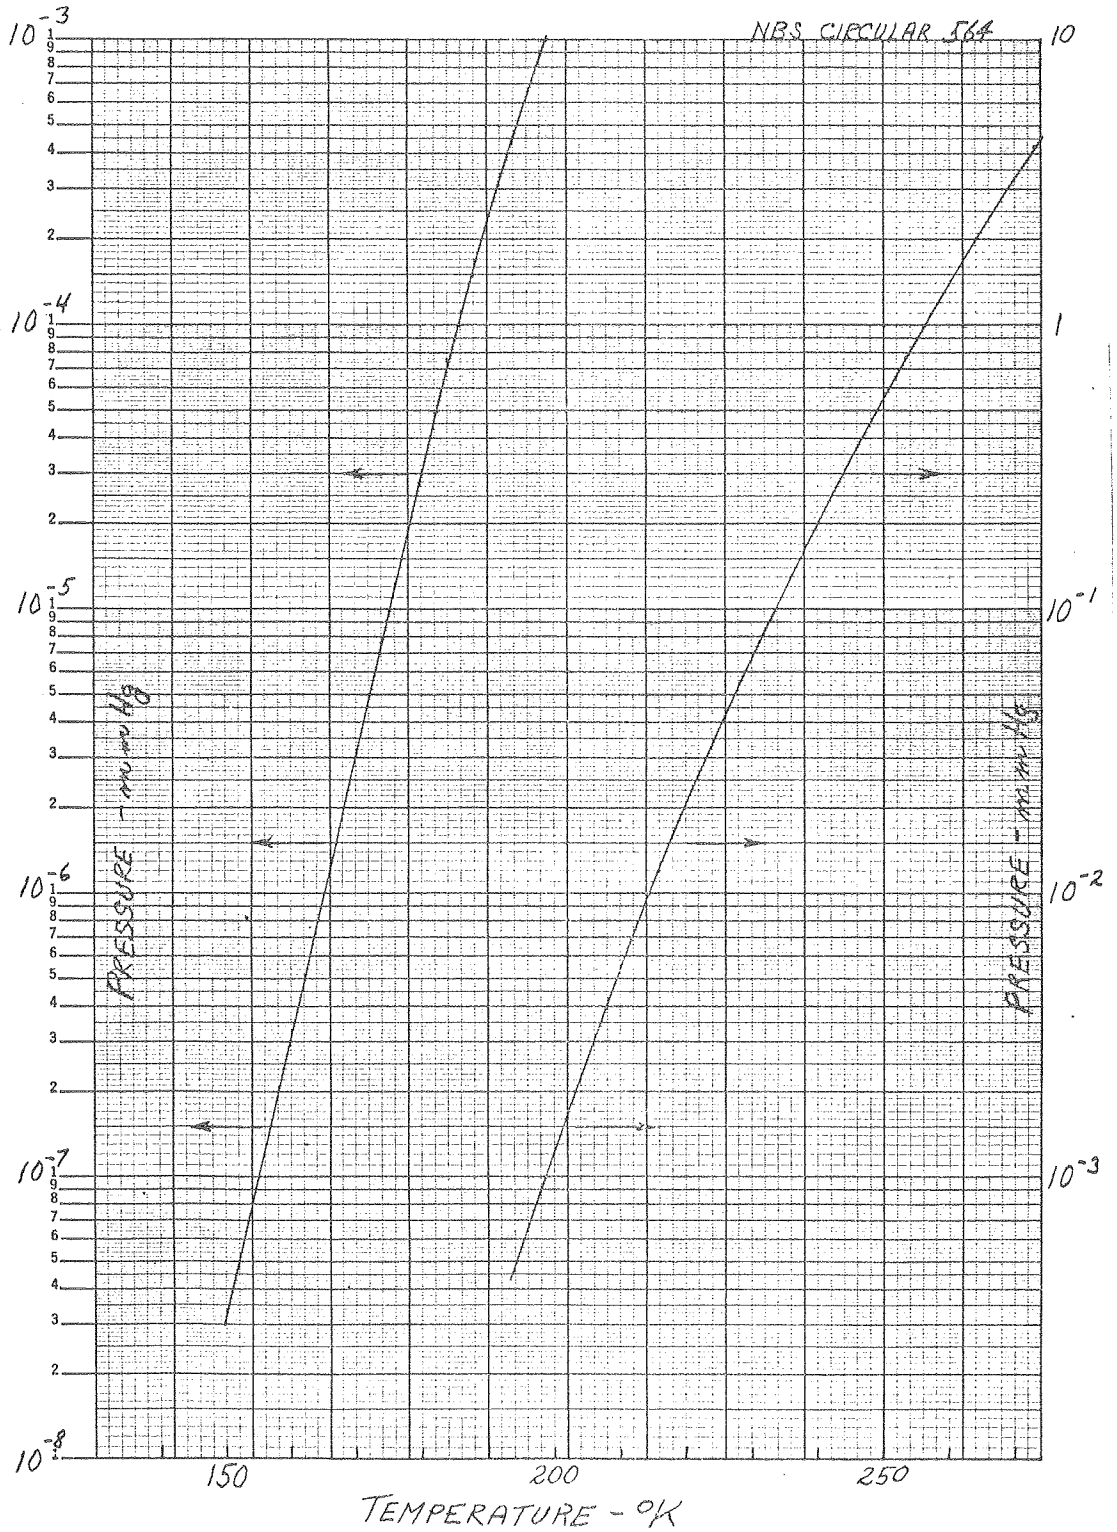

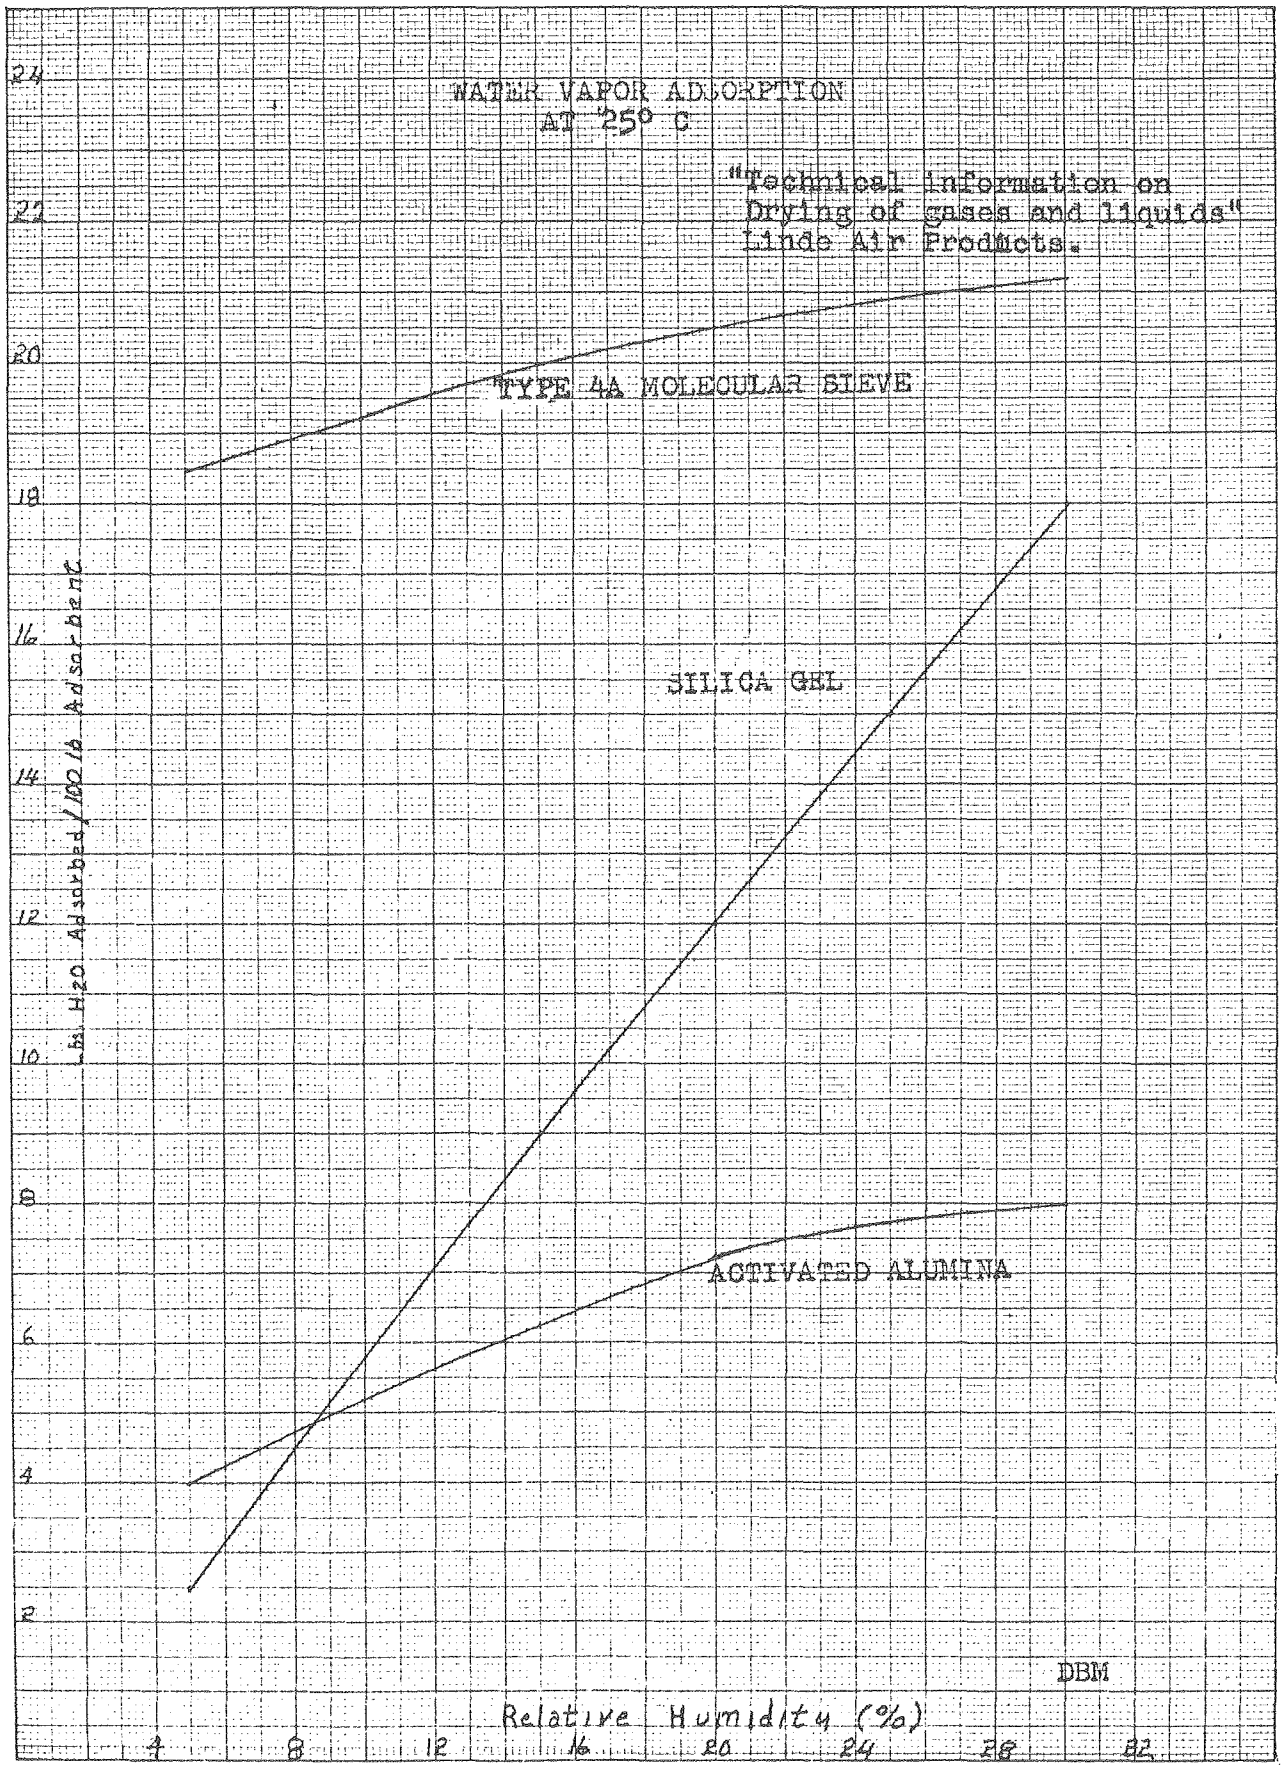
WATER VAPOR ADSORPTION
AT 25° C
"Technical Information on
Drying of gases and liquids"
Linde Air Products.
TYPE 4A MOLECULAR SIEVE
SILICA GEL
ACTIVATED ALUMINA
Lb. H2O Adsorbed / 100 lb Adsorbent
Relative Humidity (%)
DBM
24
22
20
18
16
14
12
10
8
6
4
2
4
8
12
16
20
24
28
32

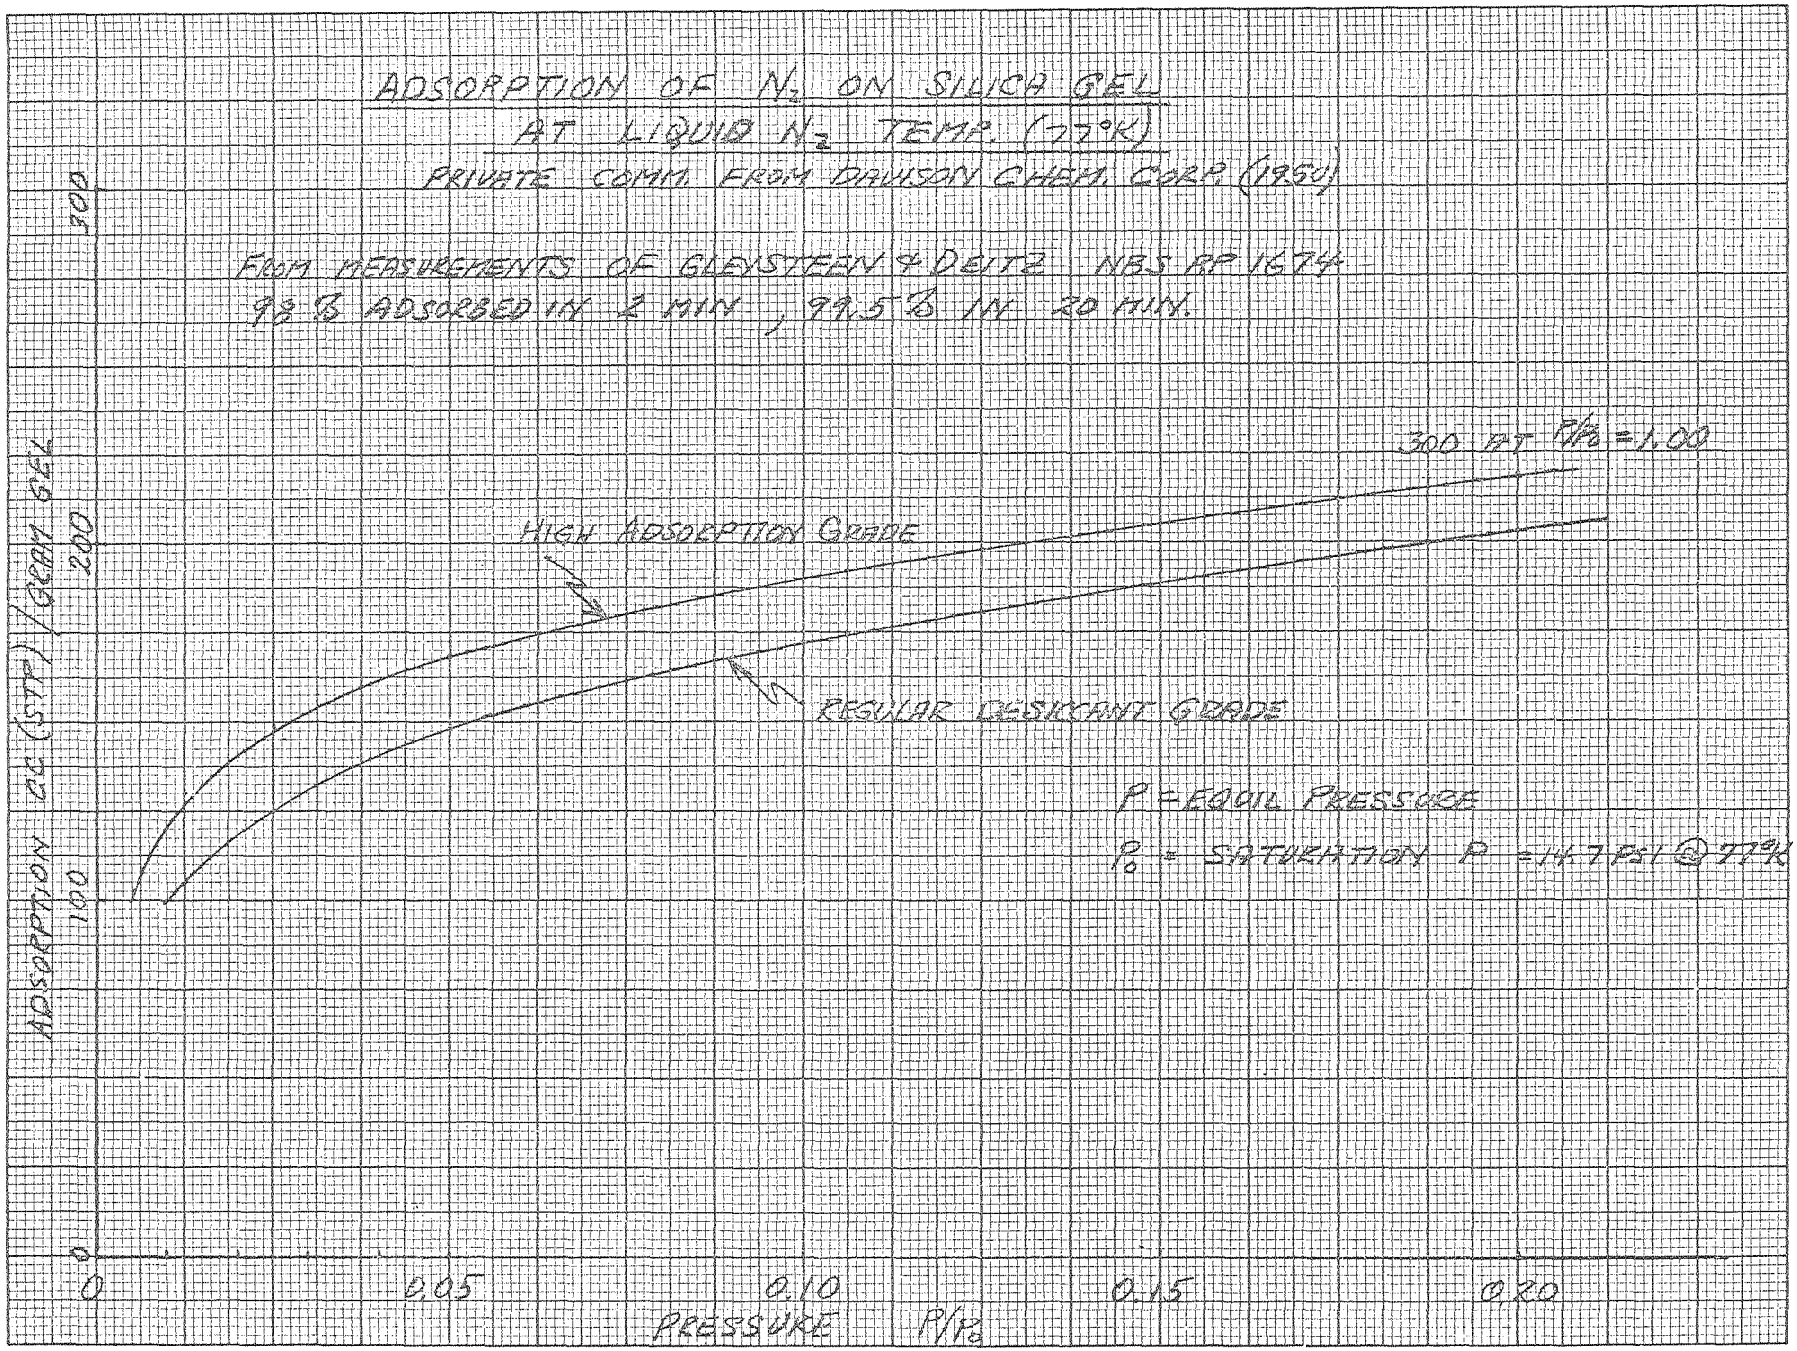
ADSORPTION OF N_2 ON SILICA GEL
AT LIQUID N_2 TEMP. (77°K)
PRIVATE COMM. FROM DAVISON CHEM. CORP. (1950)
FROM MEASUREMENTS OF GLEYSTEEN & DEITZ NBS RP 1674
99% ADSORBED IN 2 MIN, 99.5% IN 20 MIN.
300 AT P/P_0 = 1.00
HIGH ADSORPTION GRADE
REGULAR DESICCANT GRADE
P = EQUIL PRESSURE
P_0 = SATURATION P = 14.7 PSI @ 77°K
ADSORPTION cm^3 (STP) / GRAM GEL
300
200
100
0
0
0.05
0.10
0.15
0.20
PRESSURE P/P_0

This report was done with support from the United States Energy Research and Development Administration. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the United States Energy Research and Development Administration.

0 0 0 0 4 5 0 2 2 9 4