UCRL 919
cy 2

UNIVERSITY OF CALIFORNIA

Radiation Laboratory

TWO-WEEK LOAN COPY

This is a Library Circulating Copy which may be borrowed for two weeks. For a personal retention copy, call Tech. Info. Division, Ext. 5545

BERKELEY, CALIFORNIA

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

UCRL-919
Unclassified Distribution

UNCLASSIFIED

UNIVERSITY OF CALIFORNIA

Radiation Laboratory

Contract No. W-7405-eng-48

A Thick Target for Synchrotrons and Betatrons

E. M. McMillan

September 19, 1950

Berkeley, California

INSTALLATION:	No. of Copies
Argonne National Laboratory	8
Armed Forces Special Weapons Project	1
Atomic Energy Commission, Washington	2
Battelle Memorial Institute	1
Brush Beryllium Company	1
Brookhaven National Laboratory	4
Bureau of Medicine and Surgery	1
Bureau of Ships	1
Carbide and Carbon Chemicals Division (K-25 Plant)	4
Carbide and Carbon Chemicals Division (Y-12 Plant)	4
Chicago Operations Office	1
Columbia University (J. R. Dunning)	1
Columbia University (G. Failla)	1
Dow Chemical Company	1
H. K. Ferguson Company	1
General Electric, Richland	3
Harshaw Chemical Corporation	1
Idaho Operations Office	1
Iowa State College	2
Kansas City Operations Branch	1
Kellex Corporation	2
Knolls Atomic Power Laboratory	4
Los Alamos Scientific Laboratory	3
Mallinckrodt Chemical Works	1
Massachusetts Institute of Technology (A. Gaudin)	1
Massachusetts Institute of Technology (A. R. Kaufmann)	1
Mound Laboratory	3
National Advisory Committee for Aeronautics	1
National Bureau of Standards	3
Naval Radiological Defense Laboratory	2
New Brunswick Laboratory	1
New York Operations Office	3
North American Aviation, Inc.	1
Oak Ridge National Laboratory	8
Patent Branch, Washington	1
Rand Corporation	1
Sandia Corporation	1
Santa Fe Operations Office	2
Sylvania Electric Products, Inc.	1
Technical Information Division (Oak Ridge)	15
USAF, Air Surgeon (Lt. Col. R. H. Blount)	1
USAF, Director of Armament (Captain C. I. Browne)	1
USAF, Director of Research and Development (Col. R. J. Mason, Fred W. Bruner)	2
USAF, Eglin Air Force Base (Major A. C. Field)	1
USAF, Kirtland Air Force Base (Col. Marcus F. Cooper)	1
USAF, Maxwell Air Force Base (Col. F. N. Moyers)	1
USAF, NEPA Office	2
USAF, Office of Atomic Energy (Col. H. C. Donelly, A. A. Fickel)	2
USAF, Offutt Air Force Base (Col. H. R. Sullivan, Jr.)	1
USAF, Wright-Patterson Air Force Base (Rodney Nudenberg)	1

INSTALLATION:	No. of Copies
U. S. Army, Atomic Energy Branch (Lt. Col. A. W. Betts)	1
U. S. Army, Army Field Forces (Captain James Kerr)	1
U. S. Army, Commanding General, Chemical Corps Technical Command (Col. John A. MacLaughlin thru Mrs. Georgia S. Benjamin)	1
U. S. Army, Chief of Ordnance (Lt. Col. A. R. Del Campo)	1
U. S. Army, Commanding Officer, Watertown Arsenal (Col. C. H. Deitrick)	1
U. S. Army, Director of Operations Research (Dr. Ellis Johnson)	1
U. S. Army, Office of Engineers (Allen O'Leary)	1
U. S. Army, Office of the Chief Signal Officer (Curtis T. Clayton thru Maj. George C. Hunt)	1
U. S. Army, Office of the Surgeon General (Col. W. S. Stone)	1
U. S. Geological Survey (T. B. Nolan)	2
USAF, Director of Plans and Operations (Col. R. L. Applegate)	1
U. S. Public Health Service	1
University of California at Los Angeles	1
University of California Radiation Laboratory	5
University of Rochester	2
University of Washington	1
Western Reserve University	2
Westinghouse Electric Company	4
Naval Medical Research Institute	1
California Institute of Technology (R. F. Bacher)	1
TOTAL	138

Information Division
Radiation Laboratory
University of California
Berkeley, California

INSTALLATION:	No. of Copies
U. S. Army, Atomic Energy Branch (Lt. Col. A. W. Betts)	1
U. S. Army, Army Field Forces (Captain James Kerr)	1
U. S. Army, Commanding General, Chemical Corps Technical Command (Col. John A. MacLaughlin thru Mrs. Georgia S. Benjamin)	1
U. S. Army, Chief of Ordnance (Lt. Col. A. R. Del Campo)	1
U. S. Army, Commanding Officer, Watertown Arsenal (Col. C. H. Deitrick)	1
U. S. Army, Director of Operations Research (Dr. Ellis Johnson)	1
U. S. Army, Office of Engineers (Allen O'Leary)	1
U. S. Army, Office of the Chief Signal Officer (Curtis T. Clayton thru Maj. George C. Hunt)	1
U. S. Army, Office of the Surgeon General (Col. W. S. Stone)	1
U. S. Geological Survey (T. B. Nolan)	2
USAF, Director of Plans and Operations (Col. R. L. Applegate)	1
U. S. Public Health Service	1
University of California at Los Angeles	1
University of California Radiation Laboratory	5
University of Rochester	2
University of Washington	1
Western Reserve University	2
Westinghouse Electric Company	4
Naval Medical Research Institute	1
California Institute of Technology (R. F. Bacher)	1
TOTAL	138

Information Division
Radiation Laboratory
University of California
Berkeley, California

A Thick Target for Synchrotrons and Betatrons

E. M. McMillan

Radiation Laboratory, Department of Physics
University of California, Berkeley, California

September 19, 1950

The targets ordinarily used in electron synchrotrons and betatrons are very thin compared to the range of the electrons. This is satisfactory for most research purposes where a narrow beam of x-rays is desired; Schiff[1] has shown that thickening the target mainly increases the width of the beam with little gain in central intensity, and furthermore the distortion of the x-ray spectrum due to multiple radiative processes in a thick target is usually undesirable. In a platinum target only 0.020 inch thick, which converts about 15 percent of the electron energy into radiation, this distortion is already appreciable and must be corrected for in some experiments.

However one can imagine cases where a thick target would be useful, as for example in radiographic work where a wide beam is wanted in order to cover large objects. It is difficult to make the circulating beam traverse a thick target directly because of the very small spacing between successive turns. But suppose that the beam first passes through a very thin target, mounted as a projecting fin on the edge of a thick target, as shown in the figure. The energy loss in the fin will make the beam pass at a smaller radius on the next time around, striking the thick target. Scattering in the fin will have a similar effect (scattered electrons may make more than one turn before hitting the target). Of these two mechanisms, the energy loss by ionization is preferable since it is constant in magnitude, preserving the sharpness of the focal spot.

---

[1] L. Schiff, Phys. Rev. 70, 87 (1946)

Therefore the fin should be made of a low-Z material, such as beryllium.

Let the fin have a surface density of N mols/cm^2 and atomic number Z. Then the ionization energy loss ΔW for electrons between 1 and 300 Mev in solid materials is given reasonably well[2] by:

$$\Delta W = 3.6\ ZN\ \text{(Mev)}. \tag{1}$$

If the electron energy W is in Mev, the r.m.s. scattering angle α_o is given by:

$$\alpha_o = 1.0\ (Z/W)N^{1/2}\ \text{(radians)}. \tag{2}$$

The energy loss causes a decrease $(1 - n)^{-1}(r\Delta W/W)$ in the radius of the instantaneous orbit. (r = orbit radius in cm, n = field index = $-(r/H)(\partial H/\partial r)$, $W \gg mc^2$.) The electron oscillates about the new instantaneous orbit with the frequency $(1 - n)^{1/2}$ times the circulation frequency. These facts, together with (1) and (2) and the assumption that the initial orbit is circular, lead to the following expression for the radial displacement Δr at an angle θ following the passage through the fin. The magnetic field H is in kilogauss, and the displacement due to scattering is given a $\pm$ sign and a magnitude corresponding to α_o:

$$\Delta r = 3.3\ (Z/H)\left\{ 3.6\left[N/(1 - n)\right]\left[\cos\ (1 - n)^{1/2}\ \theta - 1\right] \pm \left[N/(1 - n)\right]^{1/2} \sin\ (1 - n)^{1/2}\ \theta \right\}\ \text{(cm)}. \tag{3}$$

The corresponding axial displacement is

$$\Delta z = \pm\ 3.3\ (Z/H)\ \left[N/n\right]^{1/2} \sin\ n^{1/2}\ \theta\ \text{(cm)}. \tag{4}$$

As a numerical example, consider a betatron with H = 3 kilogauss and n = 3/4. Let the fin be of beryllium (Z = 4) and have a thickness of 0.002 inch (N = 0.00104 mol/cm^2). Then, at $\theta = 2\pi$, the radial displacement, due entirely to the energy loss, is constant at -1.3 mm, while the axial distribution in the spot is Gaussian with a standard deviation of 1.2 mm. If n is increased to 0.8 while the other conditions remain the same, the spot becomes circular with radial

---

[2] O. Halpern and H. Hall, Phys. Rev. 73, 477 (1948)

and axial standard deviations of 1.0 mm, and the radial displacement of its center becomes - 1.5 mm.

This work was done under the auspices of the Atomic Energy Commission.

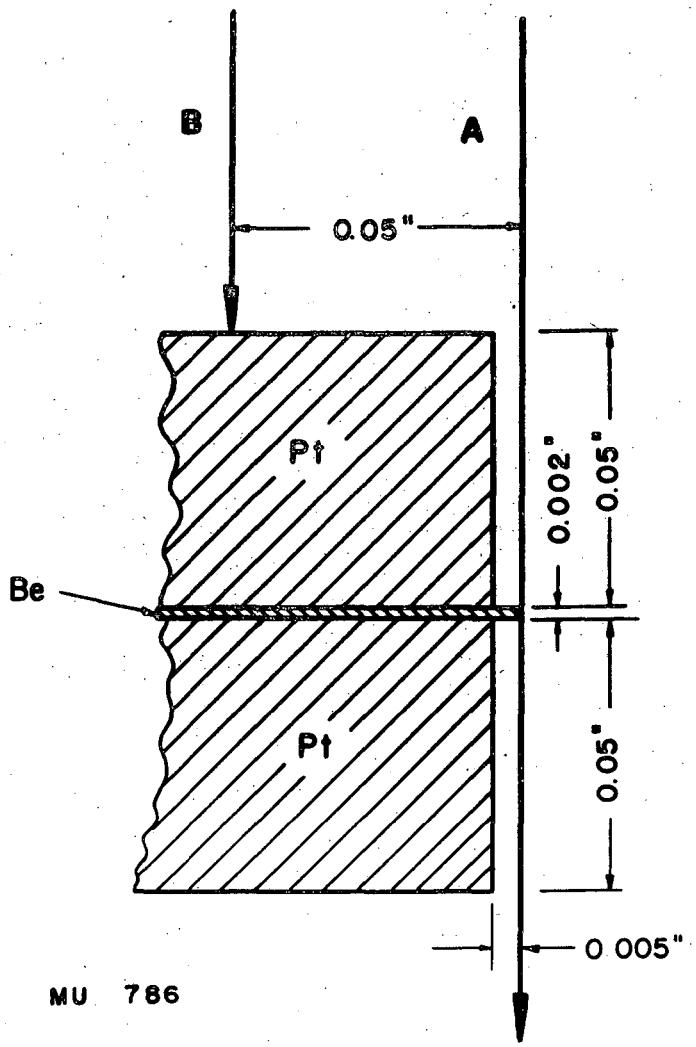

An electron following the orbit A (with its center to the left) passes through the beryllium fin, losing 15 Kev of energy; on the next time around it follows the path B, passing through the thick target. Dimensions correspond to the case given in the text, with H = 3 kilogauss, n = 3/4. An electron passing through the platinum target shown loses about 7 Mev by ionization.