



# Lawrence Berkeley Laboratory


UNIVERSITY OF CALIFORNIA

## ENERGY & ENVIRONMENT DIVISION

RECEIVED  
LAWRENCE  
BERKELEY LABORATORY

JUL 2 1981

LIBRARY AND  
DOCUMENTS SECTION

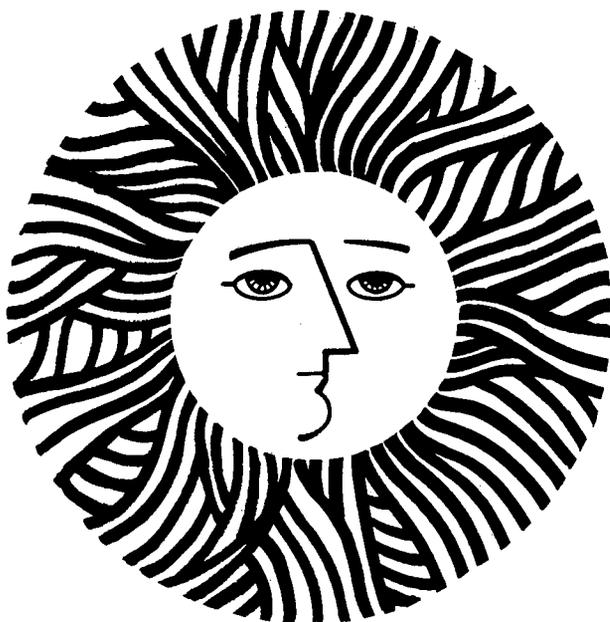

**For Reference**

Not to be taken from this room

LBID-402  
c.1

## **DISCLAIMER**

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

May 1, 1981

TO: Charles Grua

FROM: Richard Sakaji and Bonnie Jones; Frank Pearson and  
Christian Daughton (SERL)

RE: Monthly Progress Report for April  
Steam Stripping Project  
LBID-402

#### ANALYTICAL METHODS DEVELOPMENT

##### Ammonia Determination

The distillation/acidimetric titration method for ammonia determination (Standard Methods, 14th ed.) was investigated this month. Reproducibility attained for unfiltered Oxy-6 gas condensate samples was very good (relative standard deviation=1.05%; n=5). Samples of stripped gas condensate showed slightly more variability (rsd=4.37%; n=5) presumably because of the small titrant volumes required (1.10 to 1.20 mL). Appropriate adjustment of sample volumes in low-level determinations should improve the reproducibility.

Ammonia recovery from stripped gas condensate samples spiked with 250 to 50,000 ppm ammonia nitrogen (commercial ammonium sulfate standard) demonstrated that there were no significant losses of ammonia from the samples and no detectable interferences. Ammonia recovery was greater than 97%. Linear regression of ammonia added vs ammonia recovered yielded the line  $y=1.01x + 91.0$  ( $r^2 = .999$ ). We have not yet determined whether volatile amines from our sample matrix contribute a positive interference by co-distilling with ammonia. Until this is determined, we cannot distinguish between ammonia and "distillable bases".

#### STEAM STRIPPER DESIGN

##### Preliminary Work

Fabrication of the 5' X 10' X 20' (wXdXht) support-structure for the steam stripper was completed.

Recommendations were made on the lengths of 8" O.D. stainless steel pipe for each of the process units. These lengths are: overheads condenser, 14'8"; bottoms receiver, 6'0"; they are to be cut from one 20'8" length of

pipe. The second length of pipe, between 19'6" and 20'6" long, will yield a 12'6" length for the steam generator, a 6'0" length for the feed preheater, and a length between 2'0" and 3'0" for the steam drier.

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

TECHNICAL INFORMATION DEPARTMENT  
LAWRENCE BERKELEY LABORATORY  
UNIVERSITY OF CALIFORNIA  
BERKELEY, CALIFORNIA 94720