LBL-17963
Preprint c.2

Lawrence Berkeley Laboratory

UNIVERSITY OF CALIFORNIA

RECEIVED
LAWRENCE
BERKELEY LABORATORY

OCT 9 1984

LIBRARY AND
DOCUMENTS SECTION

Materials & Molecular Research Division

Submitted to Physical Review Letters

THE INTERPRETATION OF DIFFUSE LEED INTENSITIES

D.K. Saldin, J.B. Pendry, M.A. Van Hove,
and G.A. Somorjai

July 1984

TWO-WEEK LOAN COPY
This is a Library Circulating Copy
which may be borrowed for two weeks.

Prepared for the U.S. Department of Energy under Contract DE-AC03-76SF00098

LBL-17963 c.2

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

LBL-17963

THE INTERPRETATION OF DIFFUSE LEED INTENSITIES

D.K. Saldin and J.B. Pendry,
The Blackett Laboratory,
Imperial College, London SW7 2BZ, U.K.

and

M.A. Van Hove and G.A. Somorjai,
Materials and Molecular Research Division,
Lawrence Berkeley Laboratory, and
Department of Chemistry,
University of California, Berkeley,
Berkeley, CA 94720, U.S.A.

PACS 61.14.Dc, 61.14.Hg, 68.20.+t

THE INTERPRETATION OF DIFFUSE LEED INTENSITIES

D.K. Saldin and J.B. Pendry,
The Blackett Laboratory,
Imperial College, London SW7 2BZ, U.K.

and

M.A. Van Hove and G.A. Somorjai,
Materials and Molecular Research Division,
Lawrence Berkeley Laboratory, and
Department of Chemistry,
University of California, Berkeley,
Berkeley, CA 94720, U.S.A.

ABSTRACT

It is shown that the diffuse Low-Energy Electron Diffraction (LEED) that occurs between sharp LEED beams can be used to determine the local bonding configuration near disordered surface atoms. Two approaches to the calculation of diffuse LEED intensities are presented for the case of lattice-gas disorder of an adsorbate on a crystalline substrate. The capabilities of this technique are most similar to those of NEXAFS, but avoid the restrictions due to the use of photons.

Low-Energy Electron Diffraction (LEED) has become one of the most powerful tools for the study of surface crystallography, routinely yielding atomic coordinates to 0.05Å and often better under favourable circumstances.[1,2] Yet so far the interpretation of experiments has been limited to well-ordered surfaces, unlike the case of some other techniques, such as Surface Extended X-ray Absorption Fine Structure (SEXAFS),[3] Extended Appearance Potential Fine Structure (EAPFS),[4] Surface Extended Energy Loss Fine Structure (SEELFS),[5] Electron Energy Loss Near Edge Structure (ELNES),[6] Angle-Resolved Photoelectron Emission Fine Structure (ARPEFS)[7] and more generally Angle-Resolved Photoelectron Emission Spectroscopy (ARPES).[8]

Though the study of ordered systems is far from exhausted, it must be regarded as a drawback of the LEED technique not to be able to interpret the diffuse scattering that is seen when the surface is disordered in some way. In particular one is then restricted to studying adsorbates at discrete coverages corresponding to the ordered structures. Also the low-coverage limit of isolated adsorbates on a surface is then a difficult one to approach theoretically, because the unit cell (if it exists) becomes too large to handle with most current methods.[9] The same problem of large unit cells arises with saturation coverages of large molecules adsorbed on a substrate.[9] Here the molecule-substrate interaction is both the dominant and the chemically significant quantity. By contrast, the molecule-molecule interactions (responsible for any ordering) are relatively weak and chemically secondary.

In the past, Duke et al[10] and Moritz et al[11] have considered the disorder problem in LEED theory with methods that have restricted applicability.

Recently, a whole series of techniques have been developed,[3-8] which are local probes of surface crystallography, insensitive to any long-range ordering that the surface may have. These techniques range in theoretical complexity from SEXAFS, which is primarily sensitive to interatomic distances, to NEXAFS, which through multiple electron scattering is also directly sensitive to the direction of bonds.

It is the purpose of this letter to point out that a LEED experiment can also be considered a local probe, and in particular that the examination of the diffuse scattering removes the requirement of long-range order.

As we shall show, the main features of a LEED pattern (sharpness and streaking of beam spots, distribution of diffuse scattering) are, to a good approximation, governed by a kinematic structure factor that depends only on the nature of the long-range order. This structure factor modulates a separable form factor representing the electron scattering (including multiple scattering) by atom clusters of size determined by the electronic mean free path. This form factor includes all the short-range structural information: layer spacings, bond lengths, bond angles.

More formally we can write the diffracted intensity in terms of a greens function G,

$$I(\underline{k},\underline{k}') = |\langle \underline{k} \,|G|\, \underline{k}'\rangle|^2 \qquad (1)$$

where G can be expressed in terms of the free electron greens function

$$G_o(\underline{r},\underline{r}') = (4\pi)^{-1} \exp(ik|\underline{r}-\underline{r}'|)/|\underline{r}-\underline{r}'| \qquad (2)$$

and the scattering amplitude t_j for the atoms j in the crystal:

$$G = G_o + \sum_j G_o t_j G_o + \sum_{jk} G_o t_j G_o t_k G_o + \ldots \tag{3}$$

This expression is quite general and describes both the coherent scattering that is confined to the discrete beams appearing as spots on the LEED screen, and the diffuse scattering that appears as a fuzzy distribution of intensity between these spots.

We now specialize to the case of a lattice-gas adsorbate on a perfectly periodic substrate and define G_c to be all the contributions to G that involve only scatterers in an ordered array. It makes no contribution to the amplitude between the discrete beams. It is possible to develop a perturbation as follows. Define G_J to be all those contributions to G that involve t_J (for the Jth disordered adsorbate), at least once, none of the other disordered adsorbates, but all possible additional scatterings from the ordered lattice. If the disordered adsorbates are sufficiently far apart we can neglect the second order terms G_{JK} that involve t_J and t_K (corresponding to different adsorbates), at least once each. The inelastic scattering ensures that these contributions are small, and in any case averaging over the disorder will further reduce their contribution.

Hence we can approximate

$$I(\underline{k},\underline{k}') \simeq |\langle \underline{k} \,|G_c|\, \underline{k}'\rangle + \sum_J \langle \underline{k} \,|G_J|\, \underline{k}'\rangle|^2 \tag{4}$$

This approximation becomes exact in the limit that the disordered adsorbates are far apart, or more precisely, in the limit that multiple scattering between adsorbates is negligible. This is in practice a good approximation already whenever adsorbates are not directly bonded together, as in Ni(100)-c(2x2)-O.[12]

If we are interested only in the diffuse scattering, the G_c term drops out. For lattice-gas disorder the G_J term depends on J only through a phase factor involving $\underline{R}_J$, the vector from a reference adsorbate (labeled 1) to the Jth adsorbate. Hence, the total diffuse intensity becomes

$$I_D = F(\underline{k},\underline{k}')\ S(\underline{k}'_{\parallel}-\underline{k}_{\parallel}) \tag{5}$$

where $$F(\underline{k},\underline{k}') = |\langle\underline{k}\ |G_1|\ \underline{k}'\rangle|^2 \tag{6}$$

and $$S(\underline{k}'_{\parallel}-\underline{k}_{\parallel}) = \sum_J \exp[i(\underline{k}'-\underline{k}) \cdot \underline{R}_J] \tag{7}$$

Despite the multiple scattering, it is still possible in the dilute disordered limit to decompose the diffuse scattering into a form factor and a structure factor because we can neglect multiple scattering between separate disordered adsorbates.

This is a very powerful result, because using it we can extract from the experiment two separate quantities: S, which tells us about any long-range order the adsorbates may have, and of greater interest to us, F, which reflects the local structure near a single adsorbate. The separation can be effected by taking the energy derivative of I at constant $\underline{k}_{\parallel}$ and $\underline{k}'_{\parallel}$ to construct the logarithmic derivative, as S is then constant.

$$L(E,\underline{k},\underline{k}') = I^{-1}\ (\delta I/\delta E)\Big|_{\underline{k}_{\parallel}\ -\underline{k}'_{\parallel}} = F^{-1}\ (\delta F/\delta E)\Big|_{\underline{k}_{\parallel}\ -\underline{k}'_{\parallel}} \tag{8}$$

In fact we make use of a function of L,

$$Y = L^{-1}\ (L^{-2} + V_{oi}^2)^{-1} \tag{9}$$

which avoids the singularities possessed by L.[13] Here V_{oi} is the imaginary part of the electron self energy.

These ideas have some consequences for the theory. We have developed two separate approaches to disordered systems which we shall compare one with another below.

In the "cluster" approach we calculate G_1 directly, by splitting G_1 into three terms

$$G_1 = G_b T_M G_a \tag{10}$$

where G_a represents all scatterings before the electron encounters an adsorbate; since this calculation involves only atoms of the perfectly ordered substrate, it constitutes a conventional LEED calculation for a clean surface. T_M is a modified scattering factor from the adsorbate and is the sum of all scattering events that start and finish on the adsorbate, including scattering paths through the substrate: it can be evaluated in a NEXAFS-type cluster calculation[14] having the adsorbate at the center of the cluster. Finally, G_b is the sum of all events subsequent to the electron's leaving the adsorbate for the last time; this calculation again involves only atoms of the perfectly ordered substrate and constitutes a time reversed conventional LEED calculation based on the selected exit direction. The method is exact in the limit of an isolated adsorbate.

The second approach replaces the spherical-wave representation implicit in the NEXAFS-like step of the first approach by a restricted plane-wave representation (this approach generalizes the Beam Set Neglect method[9]). Instead of using all possible plane waves, we use the plane waves obtained from the incident beam direction and the desired exit direction by addition of the two-dimensional reciprocal lattice vectors of the (1x1) substrate lattice. This selection only neglects multiple

scattering events of third and higher order. The three steps of the first approach can then be efficiently combined into a conventional LEED plane-wave treatment almost identical to a c(2x2) overlayer calculation.

We have applied both theoretical approaches to the calculation of diffuse intensities for a disordered layer of oxygen atoms adsorbed in hollow sites of the Ni(100) surface (the structure factor S has been assumed identically equal to 1 in this example). Conventional structural and non-structural parameters were chosen. The NEXAFS-type calculation used a cluster of 21 atoms with spherical waves of maximum angular momentum quantum number ρ_{out} of 13.

Figure 1 exhibits the Y function (Eq. 9) calculated with the first approach across the LEED screen at a kinetic energy of 2 hartrees (54.36eV), assuming normal incidence. Figure 2 shows the same Y function obtained with the second theoretical approach. All major features are correctly reproduced in the second approach and will therefore yield essentially the same result in a structural analysis. The sensitivity of the diffuse pattern to local geometry is evident. The total integrated diffuse intensity for a disordered lattice-gas of density corresponding to a monolayer coverage was found to be of the same order as the sum of the Bragg intensities from the substrate alone.

The rich structure of the patterns shows the amount of information available for structure determination even at a fixed kinetic energy. Since several theoretical quantities, which are time-consuming to compute, can be reused at varying exit angles, there is an advantage in performing a structural determination at just one energy, especially with the cluster approach. But I-V curves of diffuse intensities can also be used in the

same manner as I-V curves for sharp beams, most conveniently with the Beam-Set-Neglect approach.

The developments we report here constitute an extension of the LEED technique to the class of disordered adsorbate systems. This will be important for the treatment of large molecules adsorbed at surfaces and for the monitoring of adsorbate structures as a continuous function of coverage. It also allows the examination of low-surface-diffusion adsorbates or highly reactive adsorbates which cannot be made to order. The diffuse LEED method is most akin to NEXAFS, but avoids the need for synchrotron radiation. It also removes the requirement that the adsorbate contain elements different from the substrate atoms. The multiple scattering makes it more complicated than SEXAFS, EAPFS or SEELFS, but yields sensitivity to all bond lengths, bond angles and layer spacings. And since the same diffraction principles underly these techniques, they should all be capable of the same structural accuracy.

Other developments in hand include the ability to handle isolated defects in an otherwise periodic surface, such as substitutional or missing atoms.

On the experimental side, one must bear in mind that the observed diffuse LEED intensity contains contributions from all surface defects, not only those that one wishes to study. Paradoxically, this may therefore demand a higher initial surface perfection than in the case of ordered structures, where the singling out of the intensities of sharp beams filters out many imperfections. Also, thermal diffuse scattering becomes more influential. However, the situation is no worse than with SEXAFS, ARPES, etc., where these effects are equally present.

ACKNOWLEDGEMENTS

Two of us (M.A.V.H. and G.A.S.) acknowledge support by the Director, Office of Energy Research, Office of Basic Energy Sciences, Materials Sciences Division of the U.S. Department of Energy under contract Number DE-AC03-76SF00098 and the other two (D.K.S. and J.B.P.) were supported by the B.P. Venture Research Unit.

REFERENCES

1. J.B. Pendry, "Low-Energy Electron Diffraction," Academic Press (London and New York), 1974.

2. M.A. Van Hove and S.Y. Tong, "Surface Crystallography by LEED," Springer-Verlag (Heidelberg), 1979.

3. J. Stöhr, R. Jaeger, and S. Brennan, Surf. Sci. 117, 503 (1983).

4. T.L. Einstein, Appl. Surf. Sci. 11/12, 42 (1982).

5. R. Rosei, M. De Crescenzi, F. Sette, C. Quaresima, A. Savoia and P. Perfetti, Phys. Rev. B28, 1161 (1983).

6. T. Taftø and J. Zhu, Ultramicroscopy 9, 349 (1982).

7. J.J. Barton, C.C. Bahr, Z. Hussain, S.W. Robey, J.G. Tobin, L.E. Klebanoff and D.A. Shirley, Phys. Rev. Letters 51, 272 (1983).

8. D.H. Rosenblatt, J.G. Tobin, M.G. Mason, R.F. Davis, S.D. Kevan, D.A. Shirley, C.H. Li and S.Y. Tong, Phys. Rev. B23, 3828 (1981); B. Feuerbacher, B. Fitton and R.F. Willis, "Photoemission and the Electronic Properties of Surfaces", Wiley (Chichester), 1978.

9. M.A. Van Hove, Lin R.F. and G.A. Somorjai, Phys. Rev. Letters 51, 778 (1983).

10. C.B. Duke and G.E. Laramore, Phys. Rev. B2, 4765, 4783 (1970).

11. W. Moritz, H. Jagodzinski and D. Wolf, Surf. Sci. 77, 233, 249 (1978).

12. M.A. Van Hove, unpublished.

13. The function Y has been used previously in the definition of an R-factor: J.B. Pendry, J. Phys. C13, 937 (1980).

14. D. Norman, J. Stöhr, R. Jaeger, P.J. Durham and J.B. Pendry, Phys. Rev. Letters 51, 2052 (1983).

FIGURE CAPTIONS

Figure 1 Y function (Eq. 9) across the LEED screen calculated for a lattice gas of oxygen adsorbed in 4-fold symmetrical hollow sites of Ni(100) at T = 0. The cluster approach is used. The quadrants (1) to (4) show the variation of the Y function when the O-Ni layer spacing is changed from 0.9 via 1.0 and 1.1 to 1.2Å respectively. The diffuse intensity distribution has four-fold rotation symmetry for each O-Ni layer spacing. Prominent positive and negative regions are denoted by corresponding signs. Circled crosses denote substrate-induced sharp spots and dotted lines denote surface Brillouin zone boundaries (the x and y scales are slightly different).

Figure 2 Same as Figure 1 except using the Beam-Set-Neglect approach.

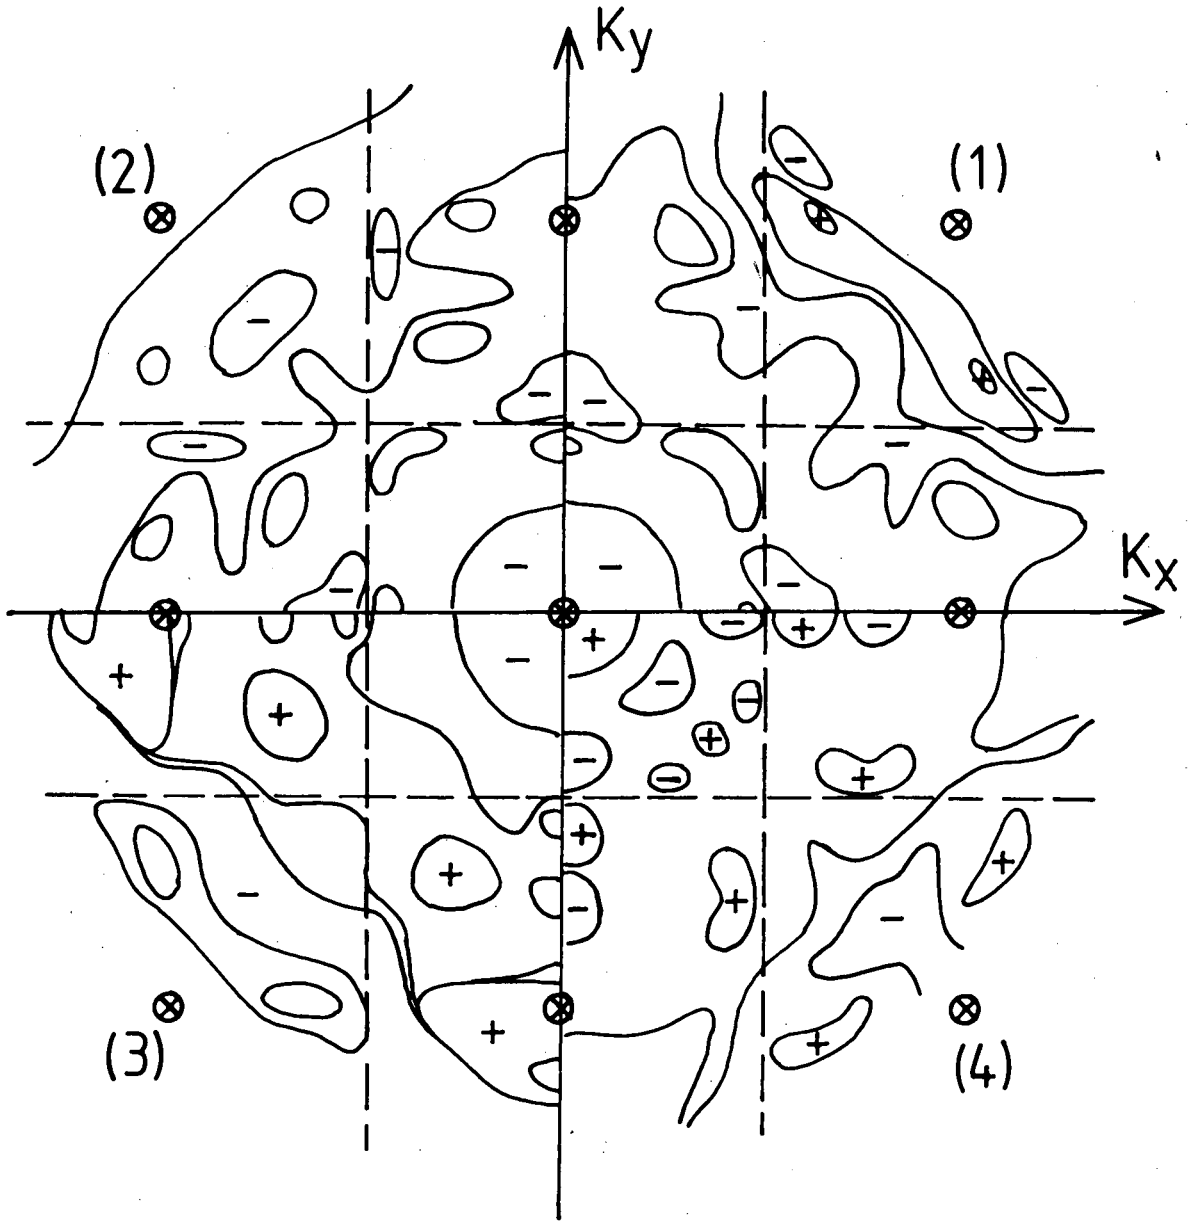

Fig. 1

XBL 847-3047

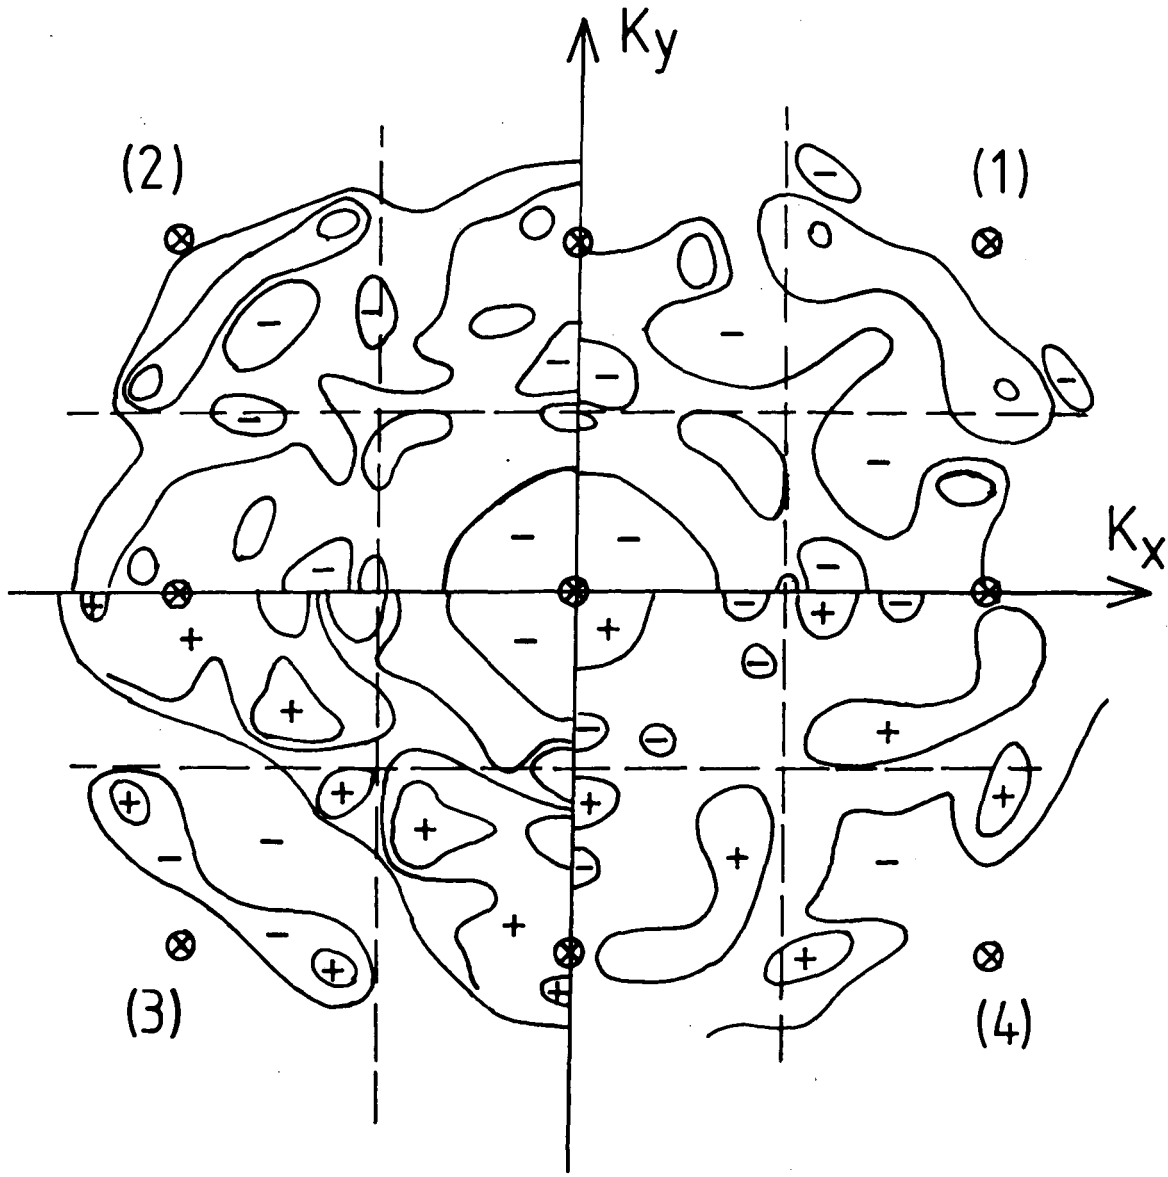

Fig. 2

XBL 847-3048

This report was done with support from the Department of Energy. Any conclusions or opinions expressed in this report represent solely those of the author(s) and not necessarily those of The Regents of the University of California, the Lawrence Berkeley Laboratory or the Department of Energy.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

TECHNICAL INFORMATION DEPARTMENT
LAWRENCE BERKELEY LABORATORY
UNIVERSITY OF CALIFORNIA
BERKELEY, CALIFORNIA 94720