UCRL-11825
c.2

University of California

Ernest O. Lawrence Radiation Laboratory

TWO-WEEK LOAN COPY

This is a Library Circulating Copy which may be borrowed for two weeks. For a personal retention copy, call Tech. Info. Division, Ext. 5545

Berkeley, California

UCRL-11825
c.2

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

UCRL-11825

UNIVERSITY OF CALIFORNIA

Lawrence Radiation Laboratory
Berkeley, California

AEC Contract No. W-7405-eng-48

RADIOFREQUENCY RESONANCE OF THE METASTABLE STATE $(2\ ^2P_{3/2}\ 3\ ^2S_{1/2})_2$ OF NEON PRODUCED AND ALIGNED BY ELECTRON IMPACT

Tetsuo Hadeishi, Orilla A. McHarris, and William A. Nierenberg

December 8, 1964

Radiofrequency Resonance of the Metastable State $(2\,^2P_{3/2}\,3\,^2S_{1/2})_2$ of Neon Produced and Aligned by Electron Impact*

Tetsuo Hadeishi, Orilla A. McHarris, and William A. Nierenberg

Lawrence Radiation Laboratory
University of California
Berkeley, California

December 8, 1964

ABSTRACT

The metastable state $(2\,^2P_{3/2}\,3\,^2S_{1/2})_2$ of neon was produced and aligned by electron impact. The diode-structure electron gun was operated at a high electron-current density under space-charge neutralization conditions. Radiofrequency resonance of the aligned metastable state $(2\,^2P_{3/2}\,3\,^2S_{1/2})_2$ was observed by monitoring the change of absorption of the λ6143-resonance radiation passing through the gap between the cathode and anode. The neon metastable-state resonance was compared with the mercury metastable-state $6\,^3P_2$ radiofrequency resonance obtained by using the same gun for both, and observed by monitoring the absorption of the λ5461-resonance radiation passing through the same excitation region. The observed $(g_J)_{Ne}/(g_J)_{Hg}$ was 1.008 ± 0.024. This method could be applied to other atoms having a metastable state with $J > 0$.

I. INTRODUCTION

Although the lifetime of the metastable state of noble gases such as He, Ne, and Ar is known to be a few milliseconds under a gas pressure of about a millimeter of Hg,[1,2] no optical detection of rf resonance other than that for helium has been reported up to the present.

One of the major difficulties in determining the rf resonance of the metastable state of the noble gases other than helium by the optical-pumping method is that their parent state has a P configuration. A state having a P configuration has a very fast relaxation time of the alignment at high buffer-gas pressure of about 1 mm Hg, even though the buffer gas is in the $^1S_0$ ground state.[3] This requires a very fast optical-pumping speed.

We recently reported the optical detection of rf resonance of the neon metastable state $(2\,^2P_{3/2}\,3\,^2S_{1/2})_2$ by means of production and alignment by electron impact.[4] The method of producing and aligning the metastable state by high current-density electrons in fact removes the difficulties associated with the requirement for fast optical-pumping speed and a high buffer-gas pressure of about 1 mm Hg, since the neon metastable state is aligned during the electron transit time corresponding to about the atomic diameter. This report presents the details of the experiment.

II. METHOD AND APPARATUS

The neon atoms were excited to the metastable state from the $^1S_0$ ground state by electron impact. The alignment due to the electron impact may be interpreted approximately according to the explanation made by Bethe[5] and Oppenheimer.[6] The probability of the excitation of the atomic

level indicated by n is given by

$$F(\underset{\sim}{p} - \underset{\sim}{p}') = - \int u_n^* u_0 \sum_j e^{i(\underset{\sim}{p} - \underset{\sim}{p}') \cdot r_j} dr,$$

where $\underset{\sim}{p}$ and $\underset{\sim}{p}'$ are the linear momentum of the electron before and after collision with the atom. For electron energies near the threshold of excitation, $\underset{\sim}{p}'$ is zero; therefore, $\underset{\sim}{p} - \underset{\sim}{p}'$ is in the direction of $\underset{\sim}{p}$. This corresponds to the case in which $\Delta M_J = 0$. In the case of neon, the ground state is $^1S_0$. Therefore, the $M_J = 0$ of the metastable state will be produced more preferentially, if one neglects the electron-exchange effect. Electron exchange results in $\Delta M_J = \pm 1$.

The alignment property of the metastable state can be detected by means of absorption of resonance radiation corresponding to the transition from the metastable state to the higher state. Consideration of spectral line separation, intensity, and transition probabilities leads us to choose the λ6143 line.

The polarization ratio is defined as

$$P = \frac{\Delta I_{\parallel} - \Delta I_{\perp}}{\Delta I_{\parallel} + \Delta I_{\perp}},$$

where $\Delta I_{\parallel}$ and $\Delta I_{\perp}$ are the absorbed intensity of the resonance radiation whose electric vector is respectively parallel to and perpendicular to the direction of the electron beam. This ratio can be expressed in terms of population of a magnetic sublevel as

$$\frac{(2N_2 + 5N_1 + 3N_0) - (8N_2 + 2N_1)}{(2N_2 + 5N_1 + 3N_0) + (8N_2 + 2N_2)} = \frac{-6N_2 + 3N_1 + 3N_0}{10N_2 + 7N_1 + 3N_0}$$

where N_2, N_1, and N_0 are the populations of $M_J = \pm 2$, ± 1, and 0.

Therefore, preferential population of the magnetic sublevels of $M_J = 0$ and ± 1 causes P to exceed zero. An rf resonance with sufficiently high H_{rf} equalizes the population distribution, which amounts to causing P to equal zero. Figure 1 shows the relative directions of the lights and the electron beam.

Since the transition probability for $\Delta M_J = 0$ corresponding to the electric vector of resonance radiation parallel to the direction of the electron beam is 4:1:0 for $M_J = \pm 2$ to ± 2, ± 1 to ± 1 and 0 to 0, the absorption of the resonance radiation at rf resonance increases (Fig. 2).

A. Production and Alignment of the Metastable State

To observe the rf resonance, one must obtain a reasonable amount of the metastable-state atoms, and the metastable state must be aligned. The metastable state density was estimated by first measuring the excitation cross section at a pressure of about 1 mm of Hg. Since the rate equation for the metastable state N can be expressed by $dN/dt = \sigma(J/e)N_0 - (1/\tau)N$, where J/e is the ratio of electron current density to the electronic charge corresponding to the flux of the electron beam, τ is the relaxation time of the metastable state, N_0 is the ground-state density, and σ is the total excitation cross section. The cross section can be obtained through the relation $\sigma = (N/\tau)/(J/e)N_0$ at equlibrium. The relaxation time τ is measured from the slope of the absorption curve as we turn the electron beam off and on.[2] The density N of the metastable state is measured from the ratio of the absorbed-light intensity to the incident-light intensity through the relation

$$\frac{\Delta I}{I} = \frac{\ell \int k_\nu d\nu}{\Delta \nu} = \left(\frac{\ell}{\Delta \nu}\right) \frac{\pi e^2 N}{m_0 c} f_{ij} ,$$

where $\Delta\nu$ is the half-width of the lamp, l is the absorption path length, and f_{ij} is the oscillator strength. Therefore, the excitation cross section is

$$\sigma = \frac{1}{\left(\frac{J}{e}\right)N_0} \times \left(\frac{\Delta I}{I}\right) \times \frac{1}{\tau} \times \frac{1}{\left(\frac{l}{\Delta\nu}\right)\frac{\pi e^2}{m_0 c} f_{ij}} .$$

Using measured values of $\Delta\nu$, $\Delta I/I$, and τ and a value of $f_{ij} = 0.22$ calculated by using a method of Bates and Damgaard,[7] we get $\sigma \approx 10^{-19}$ cm^2. Therefore, in order to get a metastable-state density of about 8×10^9 atoms/cc corresponding to the pressure of about 10^{-7} mm of Hg at the ground-state gas pressure of about 10^{-2} mm of Hg, we need a current density $J = Ne/N_0\sigma\tau$ of about 16 mA/cm^2.

For the 3/4-in.-diam cathode we used, we need a current of at least 30 mA to produce the metastable-state density corresponding to 10^{-7} mm of Hg. This pressure is chosen because this operating density is typical for alkali-atom optical-pumping experiments.

Using the space-charge-neutralization method,[8] we obtained at least 30 mA of electron current over the interaction region about 2 cm along the electron path at the electron energy near the threshold of excitation. In order to operate the high-current electron beam near the 16.5-V threshold of excitation, mercury ions were chosen to space-charge-neutralize the electrons, since the ionization potential of mercury is only 10.4 V. Thus we could change the energy of the electron from 15 to 30 V with electron currents up to 1 A for a 3/4-in. cathode, although normally we operated at a much lower current. Under such a circumstance, the cathode is surrounded by a mercury-ion sheath, and the rest of the volume is filled by nearly field-free plasma. The voltage difference between the cathode

and anode is concentrated between the cathode and ion sheath, so that the electrons receive most of their acceleration between the cathode and sheath, and enter the nearly field-free plasma perpendicular to the cathode surface, except at the edge of the cathode. The edge effect is minimized by an aperture stop. The electron path can be seen from the mercury radiation emitted from the plasma region. Depending on the design of the electron gun, either convergence or divergence of the electron beam is observed. By trial-and-error changing the cathode-to-anode gap and placing different aperture stops at various locations, we were able to make the beam trajectory reasonably parallel. Figure 3 shows a cross section of the electron-gun excitation tube.

The parallelness of the electron beam was first tested by resonating the $6\,^3P_2$ state of a mercury atom by monitoring the change of the absorption of the λ5461-resonance radiation corresponding to a $6\,^3P_2$ to $7\,^3S_1$ transition.[9] This resonance was also used to compare the resonance of the neon metastable state, since with the heater current running at 7A, it is quite difficult to determine accurately the magnetic field at the metastable-state production region of the electron gun. After observing the mercury resonance, neon gas at about 1.2×10^{-2} mm of Hg was admitted into the tube. The neon metastable-state resonance is observed by monitoring the change of the absorption of λ6143-resonance radiation passing through the same region as that of the mercury resonance. A high-vacuum system using all bakeable components was used.

B. Detection System

The signal-to-noise ratio (S/N) of the neon metastable-state resonance was quite small, although that for mercury was quite large. This necessitated long-time averaging by assigning a field value to the channels of the

multi-channel pulse-height analyzer and accumulating the signals, which were converted to pulses of varying height corresponding to the channel number. Typically, an integration time of about 2-1/2 hours was required for the neon metastable state. The S/N of mercury was high enough so that one could observe it directly from the photomultiplier output in the cathode-ray oscilloscope. However, this output was also fed into the pulse-height analyzer in order to compare the resonance points and to calibrate the magnetic-field sweep region. The block diagram is shown in Fig. 4.

The light source used is the usual electrodeless discharge by means of a microwave cavity operating at about 60 to 100 W at 2.45 kMc. Other types of radiofrequency discharge with power up to 500 W were used. However, the microwave discharge turned out to be most convenient because of compactness of the cavity, although any other means of discharge would probably work as well. The required H_{rf} was about 100 to 250 mG. Some care was taken to reduce the reactance of the radiofrequency loop in order to avoid the influence of the electric field on the plasma.

RESULT

Figure 5 shows the typical neon metastable-state resonance when the polarization is parallel to the direction of the electron beam at a data-accumulation time of about 2-1/2 hours and a neon pressure of 1.2×10^{-2} mm of Hg.

This resonance corresponds to an increase in absorption at the rf resonance. In the case of the mercury resonance using the resonance absorption of λ5461, the absorption of the resonance radiation decreases at the rf resonance when the light is polarized parallel to the electron

beam, since the absorption is from $6\,^3P_2$ to $7\,^3S_1$, i.e., J changes from 2 to 1. This effect is seen from the reversal of the slope in Fig. 6.

The observed value for $(g_J)_{Ne}/(g_J)_{Hg}$ is 1.008 ± 0.024. We believe that this technique demonstrates the possibility of rf resonance of other noble gas atoms. Further improvement in electron trajectory at much lower gas pressure as well as miniaturization of the electron-gun excitation tube is in progress in order to observe the hyperfine structure of Ar^{39} by using this technique.

ACKNOWLEDGMENTS

The authors express their appreciation for the help of Professor Edgar Lipworth at the beginning stage of this experiment. Also, he originally suggested this experiment. We also appreciate the help of Dr. S. S. Alpert and Dr. M. B. White who participated in this experiment at the early stage. Mr. Michiyuki Nakamura of the Nuclear Chemistry Instrumentation Department designed the electronic detection system, Mr. Wilton Berlund of the glass shop constructed the most important part of this experiment--the electron guns, and Mr. Douglas Macdonald designed the high-vacuum system.

FOOTNOTES AND REFERENCES

* This work was done under the auspices of the U. A. Atomic Energy Commission.

1. A. V. Phelps and J. P. Molnar, Phys. Rev. 89, 1202 (1953) and A. V. Phelps and J. L. Pack, Rev. Mod. Phys. 26, 45 (1955).
2. Tetsuo Hadeishi, On the Measurements of Lifetimes, Excitation Functions, Densities, Total Cross Sections, and Polarization Ratios of the Metastable State of the Neon Atom Under Electronic Impact (Ph. D. Thesis), Lawrence Radiation Laboratory Report UCRL-10477, September 1962 (unpublished) and T. Hadeishi, S. S. Alpert, and W. A. Nierenberg, Bull. Am. Phys. Soc. 8, 363 (1963).
3. Peter L. Bender, Joint Institute for Laboratory Astrophysics, University of Colorado, private communication, 1964.
4. Tetsuo Hadeishi, Orilla A. McHarris, and William A. Nierenberg, Bull. Am. Phys. Soc. 9, 625 (1964).
5. H. Bethe, Handbuch der Physik, Vol. 24/1 (Springer Verlag, Berlin, 1933), p. 508.
6. J. R. Oppenheimer, Z. Phys. 43, 27 (1927).
7. D. R. Bates and A. Damgaard, Phil. Trans. Roy. Soc. A242, 101 (1949).
8. I. Langmuir, Phys. Rev. 33, 954 (1929).
9. H. G. Dehmelt, Phys. Rev. 103, 1125 (1956).

FIGURE LEGENDS

Fig. 1. Relative directions of the lights and the electron beam.

Fig. 2. Relevant energy levels used in the experiment.

Fig. 3. Cross-sectional view of electron-gun excitation tube. A Ne gas pressure of about 1.2×10^{-2} mm is used for the experiment.

Fig. 4. Block diagram of the detection system.

Fig. 5. Typical neon metastable-state resonance when the electric vector of $\lambda 6143$ resonance radiation is parallel to the direction of the electron-beam.

Fig. 6. Typical mercury metastable-state resonance when the electric vector of $\lambda 5461$ resonance radiation is parallel to the direction of the electron beam.

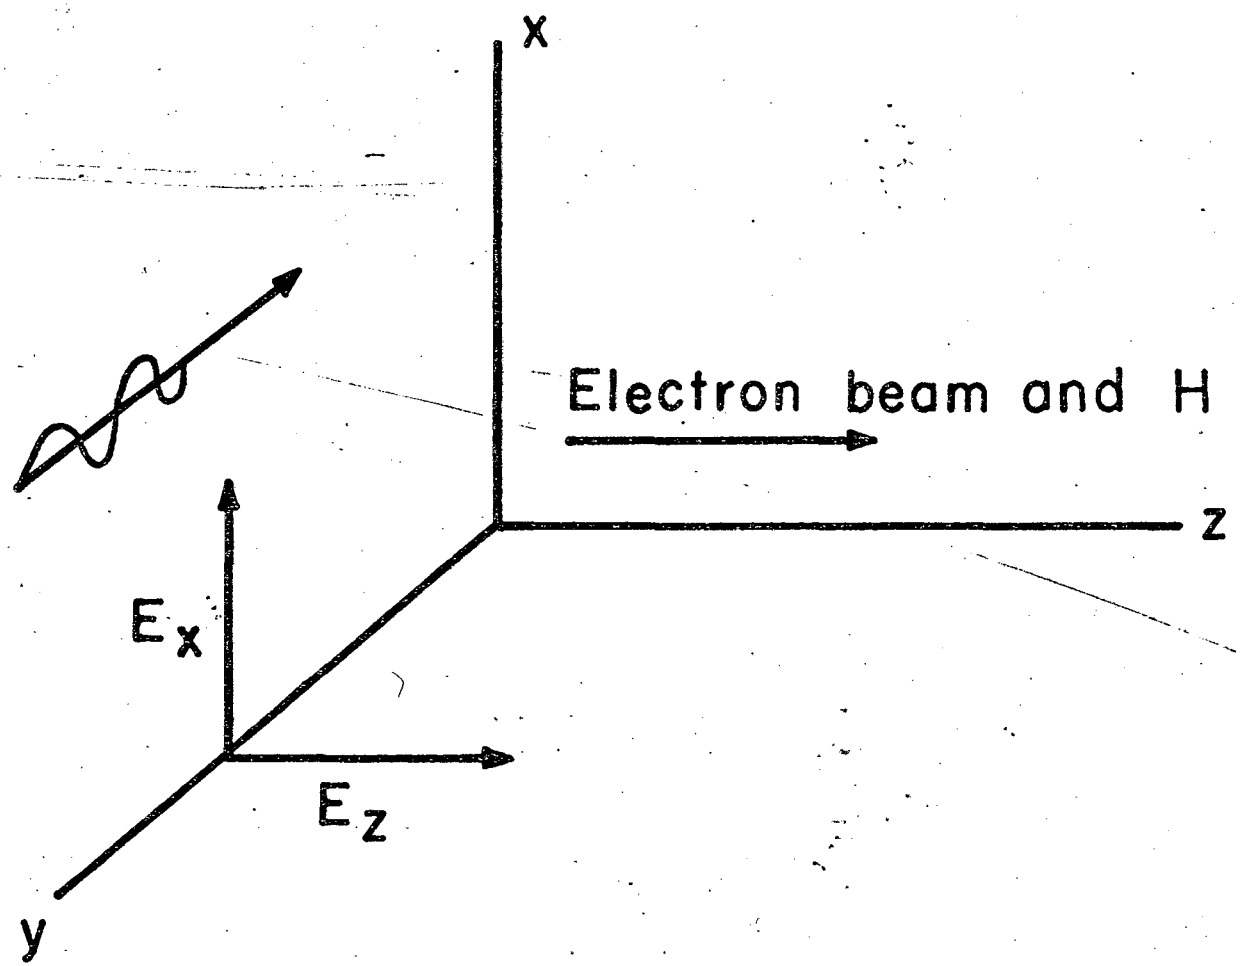

Fig. 1

MU-28332-A

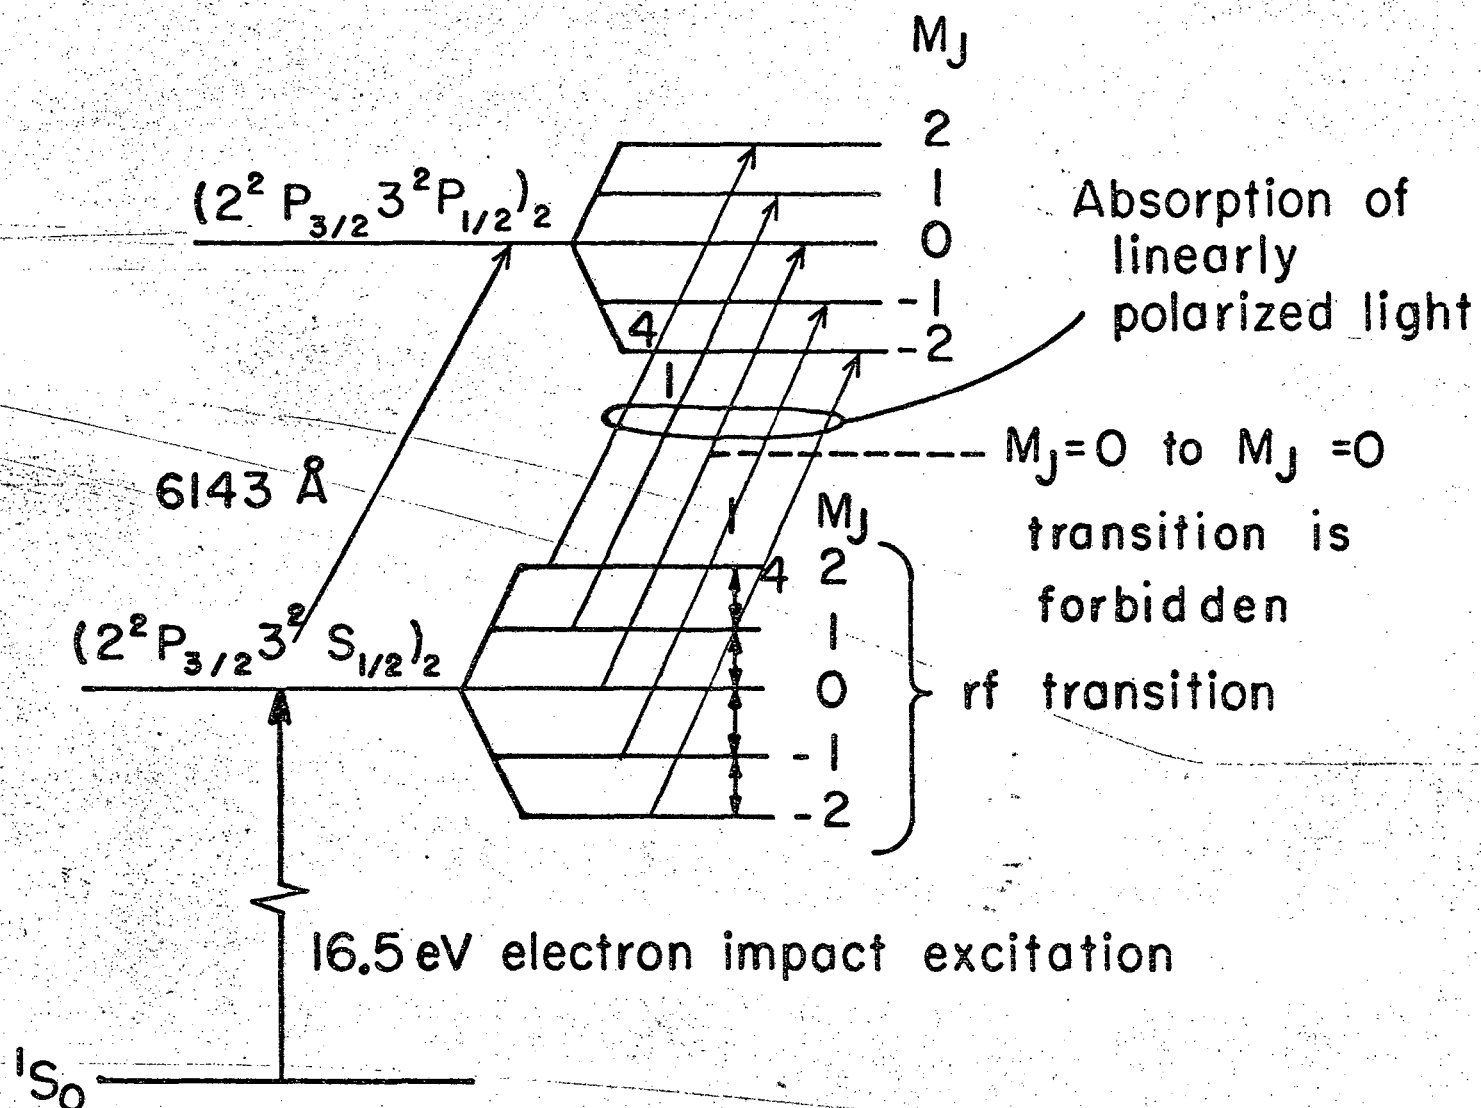

MU-28350-A

Fig. 2

Electron Gun

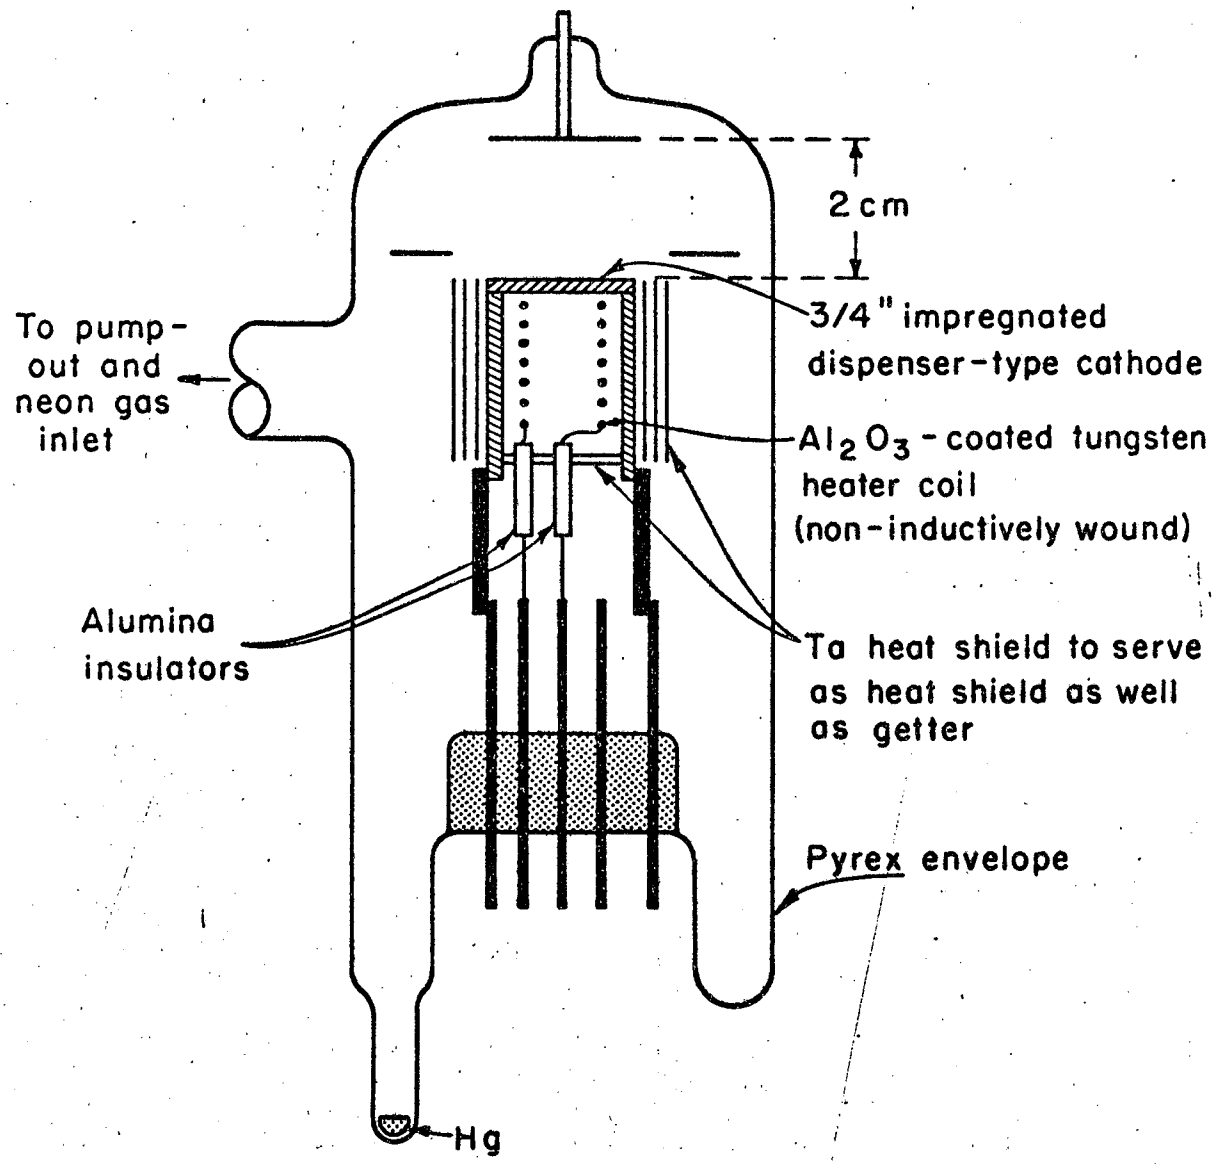

MUB-4324

Fig. 3

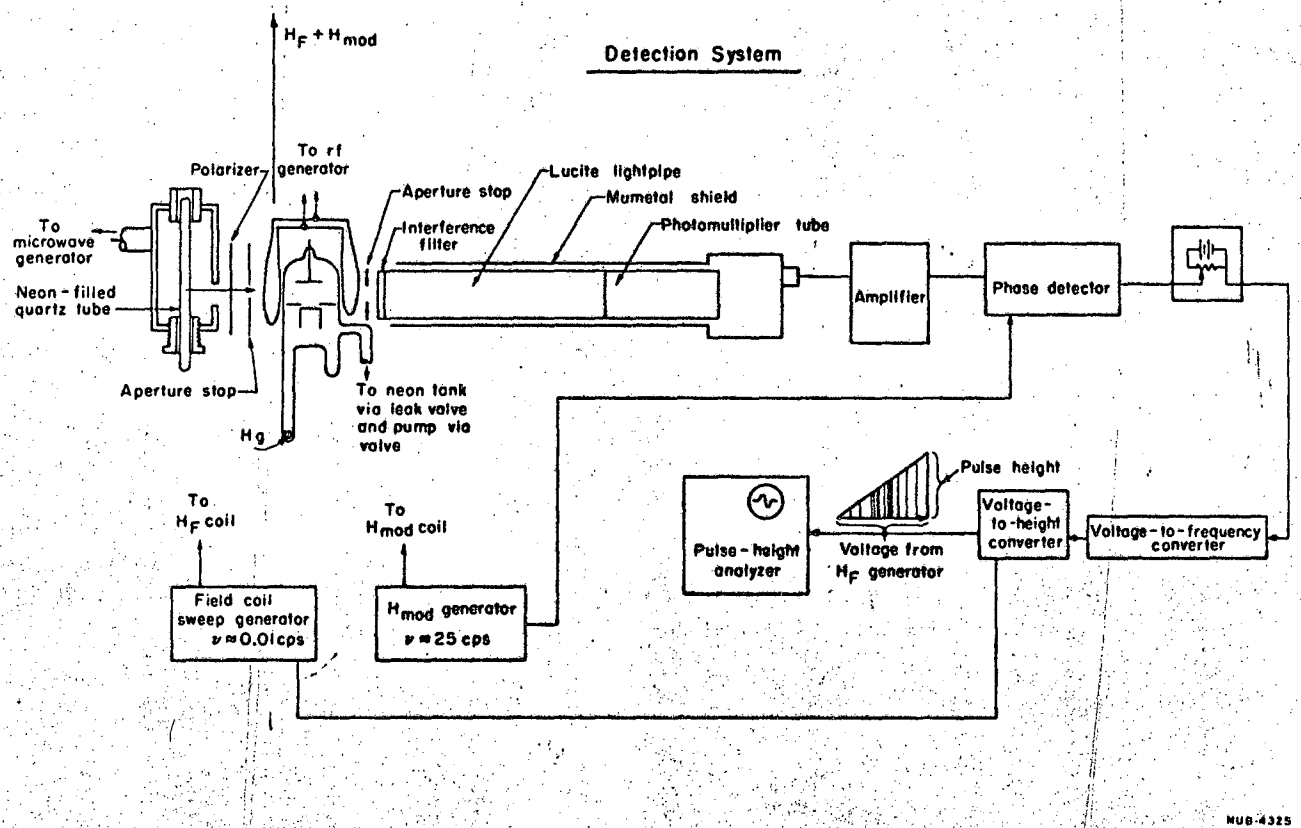
Detection System
$H_F + H_{mod}$
To rf generator
Polarizer
To microwave generator
Neon-filled quartz tube
Aperture stop
Hg
Aperture stop
Interference filter
Lucite lightpipe
Mumetal shield
Photomultiplier tube
Amplifier
Phase detector
To neon tank via leak valve and pump via valve
To H_F coil
To H_{mod} coil
Field coil sweep generator $\nu \approx 0.01$ cps
H_{mod} generator $\nu \approx 25$ cps
Pulse-height analyzer
Pulse height
Voltage from H_F generator
Voltage-to-height converter
Voltage-to-frequency converter
MUB-4325

Fig. 4

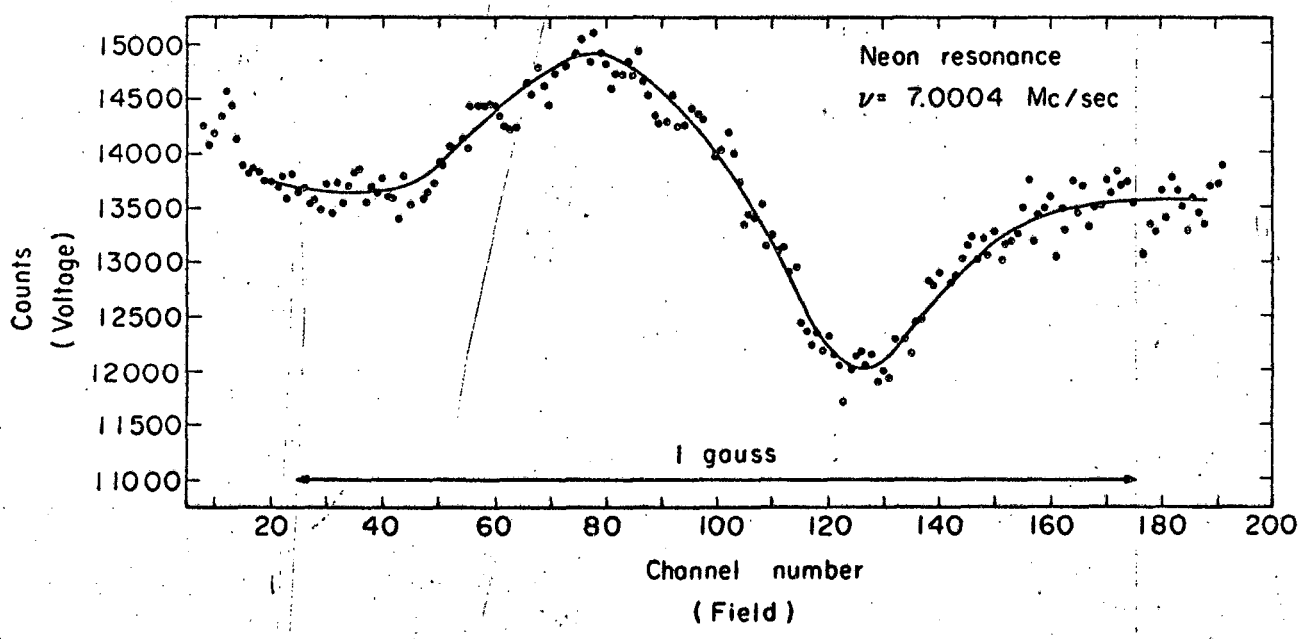
Neon resonance
ν= 7.0004 Mc/sec
1 gauss
Counts
(Voltage)
15000
14500
14000
13500
13000
12500
12000
11500
11000
20
40
60
80
100
120
140
160
180
200
Channel number
(Field)

Fig. 5

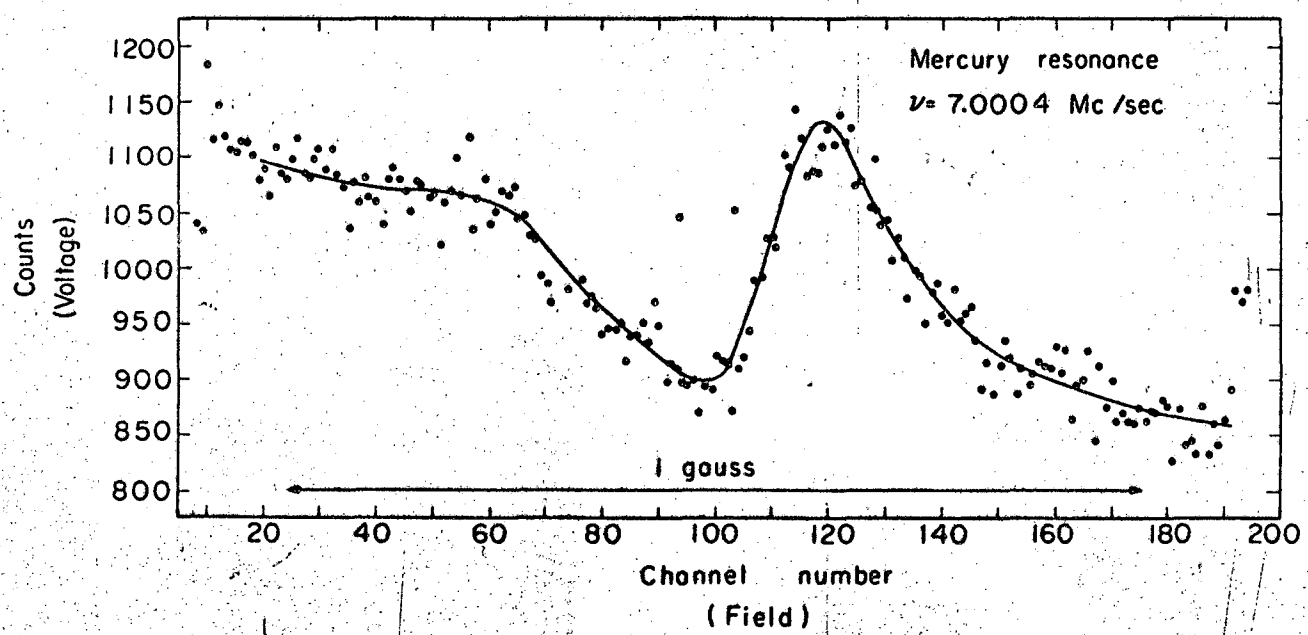

MUB-4267

Fig. 6

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or

B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.